peerless® MOUNTS

Audio/Visual Mounting Solutions

Flat Panel Mounts

Projector Mounts

DLP/CRT Mounts

Speaker Mounts

A/V Equipment Mounts

2008

product catalog

March

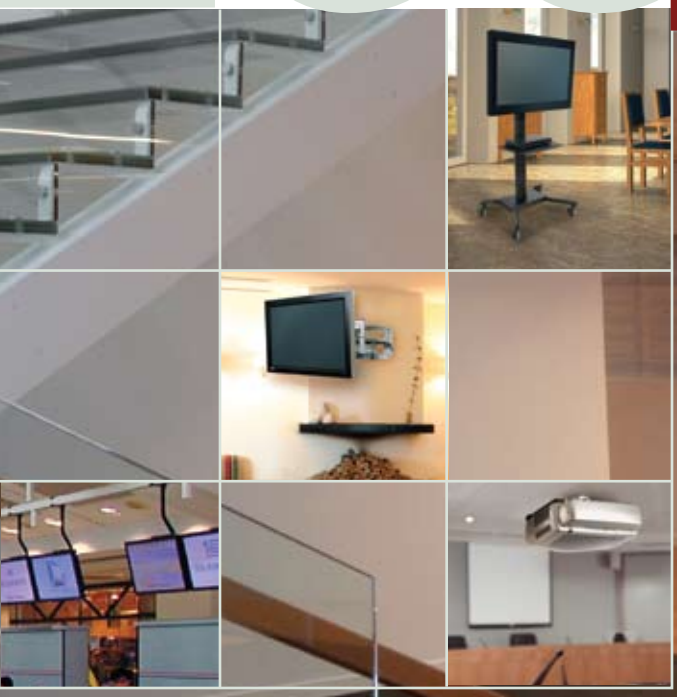

Table of Contents

Customer Care and Sales 2
Advanced Custom Capabilities 3
Catalog Legend 4
Peerless MountFinder™ 5
SmartMount® and Paramount™ Series 6

Flat Panel Display Mounts

Flat Panel Intro 7
Flat Panel Field Guide 8-11

Flat Wall Mounts

SmartMount® Universal Flat Wall Mount for 10" to 24" LCD Screens 12
Paramount™ Universal Flat Wall Mount for 10" to 24" LCD Screens 13
SmartMount® Universal Flat Wall Mount for 10" to 37" LCD Screens 14
Paramount™ Universal Flat Wall Mount for 10" to 37" LCD Screens 15
SmartMount® Universal Flat Wall Mount for 23" to 46" LCD Screens 16
Paramount™ Universal Flat Wall Mount for 23" to 46" LCD Screens 17
SmartMount® Universal Flat Wall Mount for 32" to 50" LCD & Plasma Screens .. 18
Paramount™ Universal Flat Wall Mount for 32" to 50" LCD & Plasma Screens .. 19
SmartMount® Universal Flat Wall Mount for 37" to 60" LCD & Plasma Screens .. 20
Paramount™ Universal Flat Wall Mount for 32" to 60" LCD & Plasma Screens .. 21
SmartMount® Universal Flat Wall Mount for 42" to 71" LCD & Plasma Screens .. 22
SmartMount® Universal Flat Wall Mount for 61" to 102" LCD & Plasma Screens 23
Screen-Specific Flat Wall Mount for up to 71" LCD & Plasma Screens 24

Tilt Wall Mounts

SmartMount® Universal Tilt Wall Mount for 10" to 24" LCD Screens 25
Paramount™ Universal Tilt Wall Mount for 10" to 24" LCD Screens 26
SmartMount® Universal Tilt Wall Mount for 10" to 37" LCD Screens 27
Paramount™ Universal Tilt Wall Mount for 10" to 37" LCD Screens 28
SmartMount® Universal Tilt Wall Mount for 13" to 37" LCD Screens 29
SmartMount® Universal Tilt Wall Mount for 23" to 46" LCD Screens 30
Paramount™ Universal Tilt Wall Mount for 23" to 46" LCD Screens 31
Paramount™ Universal Fixed Tilt Wall Mount for 23" to 46" LCD Screens..... 32
SmartMount® Universal Tilt Wall Mount for 32" to 50" LCD & Plasma Screens ... 33
Paramount™ Universal Tilt Wall Mount for 32" to 50" LCD & Plasma Screens ... 34
SmartMount® Universal Tilt Wall Mount for 37" to 60" LCD & Plasma Screens ... 35
Paramount™ Universal Tilt Wall Mount for 32" to 60" LCD & Plasma Screens ... 36
Paramount™ Universal Fixed Tilt Wall Mount
for 37" to 60" LCD & Plasma Screens 37
SmartMount® Universal Tilt Wall Mount for 42" to 71" LCD & Plasma Screens ... 38
SmartMount® Universal Tilt Wall Mount for 61" to 102" LCD & Plasma Screens . 39
OneMount® Modular Wall Mount for 23" to 84" LCD & Plasma Screens..... 40
Screen-Specific Tilt Wall Mount for up to 71" LCD & Plasma Screens 41

Pivot Wall Mounts

SmartMount® Pivot Wall Mount for 10" to 22" LCD Screens..... 42
Paramount™ Pivot Wall Mount for 10" to 22" LCD Screens..... 43
SmartMount® Pivot Wall Arm Mount for 22" to 40" LCD Screens..... 44
Paramount™ Pivot Wall Arm Mount for 22" to 40" LCD Screens..... 45
SmartMount® Pull-Out Swivel Wall Mount for 26" to 58" LCD & Plasma Screens 46
Pivot Wall Mount for 32" to 71" LCD & Plasma Screens..... 47

Articulating Wall Mounts

SmartMount® Articulating Wall Arm for 10" to 22" LCD Screens..... 48
Paramount™ Articulating Wall Arm for 10" to 22" LCD Screens..... 49
Articulating Wall Arm for 10" to 22" LCD Screens..... 50
SmartMount® Extended Reach Articulating Wall Arm for 10" to 22" LCD Screens 51
SmartMount® Articulating Wall Arm for 22" to 40" LCD Screens..... 52
Paramount™ Articulating Wall Arm for 22" to 40" LCD Screens..... 53
SmartMount® Articulating Wall Arm for 32" to 45" LCD & Plasma Screens 54
SmartMount® Articulating Wall Arm for 32" to 50" LCD & Plasma Screens 55
SmartMount® Articulating Wall Arm for 37" to 71" LCD & Plasma Screens 56
PLA Series Articulating Wall Arm for 32" to 50" LCD & Plasma Screens..... 57
PLA Series Articulating Wall Arm for 37" to 60" LCD & Plasma Screens..... 58
PLA Series Articulating Wall Arm with Vertical Adjustment
for 37" to 60" LCD & Plasma Screens 59
PLA Series Articulating Dual Wall Arm with Vertical Adjustment
for 42" to 71" LCD & Plasma Screens 60

In-Wall Mounts

In-Wall Box for up to 40" LCD Screens..... 61
In-Wall Mount for 22" to 40" LCD Screens..... 62
In-Wall Mount for 32" to 71" LCD & Plasma Screens..... 63

Ceiling Mounts

Paramount™ LCD Ceiling Mount for 15" to 24" LCD Screens..... 64
LCD Ceiling Mount for 13" to 29" LCD Screens..... 65
Paramount™ LCD Ceiling Mount for 15" to 37" LCD Screens..... 66
Flat Panel Ceiling Mount for 32" to 71" LCD & Plasma Screens..... 67
Dual-Screen Ceiling Mount for 30" to 50" LCD & Plasma Screens..... 68

Conversion Kit

Flat Panel Conversion Kit for up to 50" LCD & Plasma Screens..... 69

Multi-Display Mounts

Multi-Display Ceiling Mounts for 32" to 50" LCD & Plasma Screens 70
Accessories for Multi-Display Ceiling Mounts 71

Desktop Mounts

Articulating Desktop Arm for 10" to 22" LCD Screens..... 72
Height-Adjustable Desktop Mount for 10" to 22" LCD Screens..... 73
Height-Adjustable Desktop Mount for 10" to 22" LCD Screens..... 74
Tabletop Stand for 32" to 50" LCD & Plasma Screens..... 75

Stands and Carts

Pedestal Stand for 10" to 30" LCD Screens 76
SmartMount® Flat Panel TV Stand for 32" to 50" LCD & Plasma Screens..... 77
Flat Panel Stand for 32" to 60" LCD & Plasma Screens 78
Pedestal Mount for 32" to 50" LCD & Plasma Screens..... 79
SmartMount® Flat Panel TV Cart for 32" to 60" LCD & Plasma Screens 80

Environmental Enclosures

Flat Panel Screen Cover for 40" & 42" LCD & Plasma Screens..... 81
Indoor/Outdoor Environmental Enclosures for 42" to 50" LCD & Plasma Screens 82
Accessories for Indoor/Outdoor Flat Panel Environmental Enclosures 83

Projector Mounts

Projector Intro 84

Ceiling/Wall Mounts

PRG Precision Gear Projector Mount for Projectors up to 50 lb 85
PRS Projector Mount for Projectors up to 25 lb 86
PJF2 Projector Mount for Projectors up to 50 lb 87
Paramount™ Flush Ceiling Projector Mount for Projectors up to 50 lb 88
PRS Series Kitted Projector Mount for Projectors up to 25 lb 89
Wall and Ceiling Extension Kit with PRS Mount 90
Paramount™ Wall and Ceiling Projector Mount with Extension Kit 91

Security Ceiling Mounts

PSM Universal Projector Security Mount 92
PSMU Universal Projector Security Mount 93

Enclosures

Projector Enclosure 94

Carts

Jumbo® Wide Body Carts for Projectors, TVs up to 32" & A/V Equipment 95
Jumbo® Height Adjustable Carts for Projectors, TVs up to 20" & A/V Equipment . 96
Adjustable Height Multi-Purpose Cart for Projectors, TVs up to 20" & A/V Equipment... 97
Adjustable Height Video Cart for Projectors, TVs up to 20" & A/V Equipment..... 98
Adjustable Height Video Carts for Projectors, TVs up to 32" & A/V Equipment 99

CRT Mounts

Intro 100

DLP Mounts

Jumbo® DLP Wall Mounts for 42" to 65" Rear Projection DLP TVs..... 101
Jumbo® DLP Ceiling Mounts for 42" to 65" Rear Projection DLP TVs..... 102

Wall Mounts

Classic Series™ Wall Mounts for 9" to 13" CRT TVs..... 103
Designer Series™ Wall Mounts for 13" to 32" CRT TVs..... 104
Slimline® Wall Mounts for 9" to 27" CRT TVs..... 105
Jumbo 2000® Wall Mounts for 13" to 42" CRT TVs 106
OSHPD Approved Wall Mounts for 9" to 42" CRT TVs..... 107

Ceiling Mounts

Jumbo 2000® Ceiling Mounts for 13" to 42" CRT TVs 108
Jumbo 2000® Suspended Ceiling Mounts for 13" to 42" CRT TVs..... 109
Jumbo 2000® Mount Bracket for 13" to 42" CRT TVs..... 110

Desktop Mounts

Universal Desktop Swivel Mount for 19" to 32" CRT TVs 111
Slide-Out Swivel Mount for 25" to 27" CRT TVs..... 112

Carts

Jumbo® Carts for up to 40" TVs, Projectors & A/V Equipment..... 113
Jumbo® Wide Body Carts for up to 32" TVs, Projectors & A/V Equipment 114
Jumbo® Height Adjustable Cart for up to 20" TVs, Projectors & A/V Equipment. 115
Adjustable Height Multi-Purpose Cart for up to 20" TVs, Projectors & A/V Equipment..... 116
Adjustable Height Video Cart for up to 20" TVs, Projectors & A/V Equipment..... 117
Adjustable Height Video Carts for up to 32" TVs, Projectors & A/V Equipment ... 118

A/V Equipment Mounts

Intro 119

A/V Component

SmartMount® Component Shelves for Audio & Video Equipment..... 120
SmartMount® Component Shelves for Audio & Video Equipment..... 121
Electronic Tower for Audio & Video Equipment 122
Paramount™ Component Shelves for Audio & Video Equipment..... 123
Multi-Mount for Audio & Video Equipment 124
Video Conference Shelf for Video Conference Equipment..... 125

Cable Management

Cable Management Channel 126

DVD/VCR Mounts

DVD/VCR Mount Connectors for Articulating, Pivot & Ceiling Mounts..... 127
Adjustable DVD/VCR Mounts 128
Enclosed DVD/VCR Mount..... 129
Desktop DVD/VCR Mount 130

Speaker Mounts

Flat Panel Speaker Mounts for Center, Multi-Channel or 3-piece LCR Speakers 131
Paramount™ Universal Speaker Mounts for speakers weighing up to 8 lb 132
Universal Speaker Mounts for speakers weighing up to 20 lb 133
Universal Speaker Mounts for speakers weighing up to 75 lb 134

Camera Mounts

Camera Mounts for Small to Medium Security Cameras..... 135

Computer and Monitor Mounts

Computer Monitor Work Station..... 136

Accessories 137-145
Index by Model Number 146-151
Terms & Conditions 152

Largest Customer Care Team

Our Customer Care team is one of the largest in the industry and engages in comprehensive and ongoing training. Starting with a 6-week system, product training and phone etiquette program, our support staff is courteous, understanding and knowledgeable. Training continues on a weekly basis, keeping our team up-to-date on the latest product information. With individual call monitoring and weekly reviews, our team continually strives to provide the best results-driven customer care in the industry.

State-of-the-Art Technology

Our dedication to service includes providing the latest advances in technology. From online chat support to dual-screen order processing, Peerless Customer Care is fully equipped to serve your needs. With Electronic Data Interchange (EDI), your network can speak directly to our network, quickly managing your inventory and ordering. With a dedicated fulfillment team supporting online orders, we ensure your online orders are fulfilled promptly and accurately.

Extended Hours

Our Customer Care program is among the most comprehensive support systems in the industry and it is now available with extended hours, from 7:00 am to 7:00 pm Central Standard Time. With the added three hours of Customer Care support, we have extended your ability to contact us at times that are most convenient for you regardless of your location. The new hours increase productivity through faster response time to inquiries that impact your ability to get the job done.

peerless® MOUNTS

Peerless customer care

When you insist on Peerless, you get more than great audio/visual mounting solutions.

At Peerless, customer care is more than a promise; it's a commitment to excellence. Our Customer Care team sets us apart because we set you apart. We are focused on your needs. With comprehensive product training and the latest technology we are knowledgeable and capable to serve you.

Contact us:
(708) 865-8870
Toll Free: (800) 865-2112
24 Hour Fax: (708) 865-2941
Place orders: orderdesk@peerlessmounts.com

Peerless custom

Custom Solutions for Any Installation

Peerless is an industry leader in custom mounting solutions. In fact, our very first television mount was developed as a 'custom inquiry.' Over the years we've developed innovative audio/visual solutions for a wide variety of applications including: hotels, stadiums, airports, schools, retail stores, churches, bars, restaurants and more. Just because it doesn't exist yet, doesn't mean we can't design and manufacture it for you.

For more information on developing your custom solution, please contact your local sales manager or contact a Peerless Custom Project Manager at (800) 865-2112.

Peerless Makes Developing Custom Projects Simple

Custom Project Manager

Provides a single point of contact that takes responsibility for ensuring the timely and satisfactory development of your custom project.

Dedicated Engineers

Peerless offers one of the largest and most experienced custom engineering and support staffs in the industry.

State-of-the-Art Design

Using design tools such as SolidWorks, E-Drawings and Cosmos FEA, Peerless leverages leading edge technologies in the development of your custom project.

Local Manufacturing

We manufacture custom items under the same roof as our engineering team. Our 250,000 square foot facility is fully climate controlled, giving us the capability to offer the latest techniques in powder coating and to utilize a greater variety of options provided by powder coating chemistry.

ISO 9001 – Certified Facility

ISO 9001 certification means that Peerless has met the stringent quality and process-control requirements of the International Standards Organization.

UL® Approved

Not only are our products UL tested, we maintain our own UL-approved testing facility on-site. This reduces testing and evaluation time, and ensures the highest standards of safety and quality.

peerless® MOUNTS

Catalog Legend

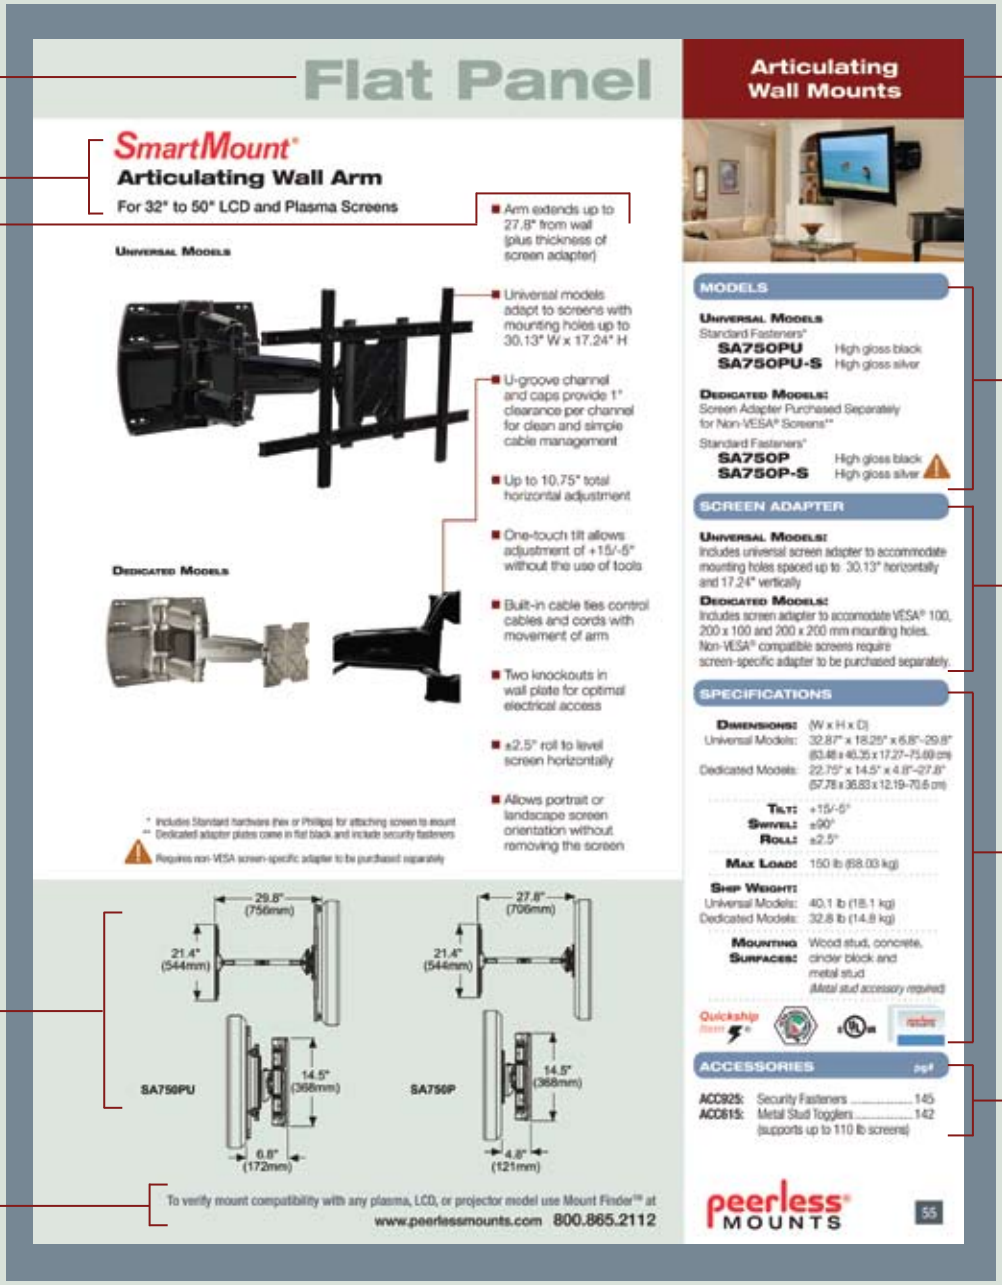
Flat Panel
Articulating Wall Mounts
SmartMount®
Articulating Wall Arm
For 32" to 50" LCD and Plasma Screens
Arm extends up to 27.8" from wall (plus thickness of screen adapter)
Universal Models
Universal models adapt to screens with mounting holes up to 30.13" W x 17.24" H
U-groove channel and caps provide 1" clearance per channel for clean and simple cable management
Up to 10.75" total horizontal adjustment
One-touch tilt allows adjustment of +15/-5° without the use of tools
Dedicated Models
Built-in cable ties control cables and cords with movement of arm
Two knockouts in wall plate for optimal electrical access
±2.5° roll to level screen horizontally
Allows portrait or landscape screen orientation without removing the screen
* Includes Standard hardware (hex or Phillips) for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners
Requires non-VESA screen-specific adapter to be purchased separately
29.8" (756mm)
21.4" (544mm)
14.5" (368mm)
6.8" (172mm)
SA750PU
27.8" (706mm)
21.4" (544mm)
14.5" (368mm)
4.8" (121mm)
SA750P
To verify mount compatibility with any plasma, LCD, or projector model use Mount Finder™ at
www.peerlessmounts.com 800.865.2112
MODELS
Universal Models
Standard Fasteners*
SA750PU High gloss black
SA750PU-S High gloss silver
Dedicated Models:
Screen Adapter Purchased Separately for Non-VESA® Screens**
Standard Fasteners*
SA750P High gloss black
SA750P-S High gloss silver
SCREEN ADAPTER
Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 30.13" horizontally and 17.24" vertically
Dedicated Models:
Includes screen adapter to accomodate VESA® 100, 200 x 100 and 200 x 200 mm mounting holes. Non-VESA® compatible screens require screen-specific adapter to be purchased separately.
SPECIFICATIONS
Dimensions: (W x H x D)
Universal Models: 32.87" x 18.25" x 6.8"-29.8" (83.48 x 46.35 x 17.27-75.69 cm)
Dedicated Models: 22.75" x 14.5" x 4.8"-27.8" (57.78 x 36.83 x 12.19-70.6 cm)
Tilt: +15/-5°
Swivel: ±90°
Roll: ±2.5°
Max Load: 150 lb (68.03 kg)
Ship Weight:
Universal Models: 40.1 lb (18.1 kg)
Dedicated Models: 32.8 lb (14.8 kg)
Mounting Surfaces: Wood stud, concrete, cinder block and metal stud (Metal stud accessory required)
ACCESSORIES
ACC925: Security Fasteners 145
ACC815: Metal Stud Togglers 142
(supports up to 110 lb screens)
peerless MOUNTS
55

- Product Category
- Product Name
- Features & Benefits
- Technical Drawings
- MountFinder™ Location
- Mount Category
- Product Model Numbers & Colors
- Interface Compatibility
- Product Specifications
- Required & Optional Accessories

LOOK FOR THESE SYMBOLS ...

Flat Panel Mounts | Projector Mounts | CRT Mounts

Quickship Item® — Items marked with this symbol are Quickship® products. They are typically available for shipment the same or next day when the order is placed by 1:30 p.m. CST. Please call your Customer Care representative as we may be able to fulfill your order even after 1:30 p.m. CST.

OSHPD — Seismic Safety: Structural calculations have been completed for these models in accordance with 2001 California state code. Please contact Customer Care for further information.

cULus — The UL listing mark means that the product has been submitted to rigorous safety testing by Underwriters Laboratories, an independent safety testing lab. For a mounting product to pass the UL approval process, it has to be tested for strength and "pull out" to a minimum of four times its stated load capacity. (Do not exceed rated capacity in actual use) Peerless is a certified UL testing facility.

VESA Mounting Interface — These products are compliant with the Video Electronic Standards Association (VESA®) Flat Display Mounting Interface (FDMI) standards.

Standard models available in retail packaging

Ships in multiple boxes

MountFinder™

The Leading Online Flat Panel Mount and Projector Compatibility Tool

MountFinder™ is a user-friendly search tool that matches a flat panel screen or projector to its compatible mounting solutions based on the entered criteria.

While visiting www.peerlessmounts.com learn all about MountFinder™ by clicking on 'About Mount Finder'.

Know the model number of the screen or projector being installed? Simply enter your model number and click 'go' or choose to select the brand and model to display all compatible mounting solutions.

See what mounting solutions are available for a particular size flat panel screen. Simply select small, medium, large or x-large from the menu to see all options.

Looking for a projector mount? Select 'Browse all projector mounts' to see our entire selection of projector mounting solutions.

By visiting www.peerlessmounts.com and selecting the 'Advanced Search' feature compatible mounts can be found based on mounting hole measurements, weight and other criteria.

MountFinder™ is the industry's most robust compatibility tool that finds the right mounting solution for your flat panel screen or projector. Just plug in your brand and model number and MountFinder locates a comprehensive list of mounts guaranteed to work with your equipment. You will even have the option to narrow your search down to the application and functionality style you're looking for. MountFinder not only makes mount-finding easy, it reduces costly ordering mistakes, saves installer time and money from having the wrong product at the job site, and may even boost your bottom line. Find out how MountFinder can be used to increase your sales and productivity by contacting the Peerless sales manager in your area.

SmartMount®

SmartMount products are Peerless' core offering of universal flat panel mounts and accessories that provide mounting solutions for practically any supporting surface within commercial, industrial or residential applications. All products are widely universal to make ordering simple, inventory stocking costs lower, and installation easier. Additionally, part number and line logic are easy to understand and remember in order to make product selection simple.

SmartMount products come standard with tamper-resistant security hardware to protect the screen from being removed from the mount. Products are finished in black, and are packaged in durable brown packaging. Models ending in 'P' denote that they include Philips hardware instead of security hardware, and are packaged in blue and white retail packaging. A suffix in the model number '-S' denotes the color variation of silver instead of standard black.

200 Series

500 Series

600 Series

700 Series

800 Series

PARAMOUNT™ by Peerless

Paramount by Peerless offers a complete selection of mounts and accessories that present the best value in the industry – all from the leading professional-grade mounting company. Each product is designed for easy and intuitive installation, consumer-friendly aesthetics and Peerless professional-grade quality. From flat panel mounts, to projector mounts, to speaker mounts and A/V equipment accessories, there's a Paramount product to fit your A/V application.

Paramount products come standard with Philips hardware to enable quick and easy installation by a professional installer or a DIY consumer. Products are finished in black, and are packaged in consumer-friendly black and yellow retail packaging. A suffix in the model number '-S' denotes the color variation of silver instead of standard black. For applications requiring security hardware, see individual product catalog pages for the appropriate security hardware accessory.

200 Series

600 Series

700 Series

900 Series

PP line

PSP line

Flat Panel mounts

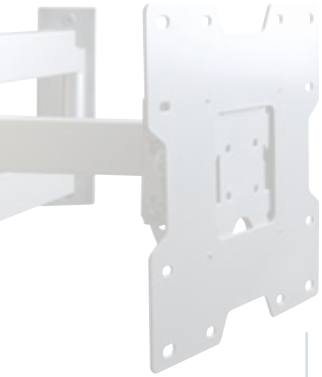

Flat

- Low-profile design holds screen less than 1.1" from the wall
- For 10"-102" LCD and plasma flat panel screens
- Easy-glide bracket design ensures screen is securely attached to the wall plate

Tilt

- Continuous, one-touch tilt for effortless adjustment without the use of tools
- For 10"-102" LCD and plasma flat panel screens
- Incremental tilt lock in 5° increments for perfect screen alignment of multiple displays

Pivot

- Extend out up to 10" and fold flat against the wall to save space
- For 10"-71" LCD and plasma flat panel screens
- Adjustable tilt allows perfect screen viewing and reduces glare

Articulating

- Extend out up to 31" from the wall and fold to within 3" of the wall to save space
- For 10"-71" LCD and plasma flat panel screens
- Cable management systems hide all cords and cable providing a clean, clutter-free installation

In-Wall

- Installs between 16" wood stud centers
- For 10"-71" LCD and plasma flat panel screens
- Removable outlet receptacle and cable management access plates make installation easy

Ceiling

- Portrait and landscape orientation available
- For 13"-71" LCD and plasma flat panel screens
- Column drops from flush to ceiling all the way to 20'

Desktop

- Bolt-down, desktop and clamp styles mounting options
- For 10"-50" LCD and plasma flat panel screens

Stands & Carts

- Internal cable management provides a safe, clean and clutter-fee installation
- For 10"-60" LCD and plasma flat panel screens
- Full line of accessories for carts and stand to meet any application requirement

Enclosures

- Indoor and outdoor solutions protect screens from water, dust, dirt and weather
- Holds 42"-50" LCD and plasma flat panel screens
- NEMA-rated

Flat Panel

Product Type	Flat Panel Screen Size Range	Model	Picture	Max Load	VESA® Pattern	Adjustable Mounting Pattern (Width x Height)
Flat	10"-24"	SF630		80 lb	75 / 100 mm	N/A
	10"-24"	PF630		80 lb	75 / 100 mm	N/A
	10"-37"	SF632		115 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	10"-37"	PF632		115 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	23"-46"	SF640		150 lb	N/A	17.73" x 12.94"
	23"-46"	PF640		150 lb	N/A	17.25" x 12.94"
	32"-50"	SF650		175 lb	N/A	29.23" x 17.05"
	32"-50"	PF650		175 lb	N/A	28.75" x 17.05"
	37"-60"	SF660		200 lb	N/A	32.48" x 17.05"
	32"-60"	PF660		200 lb	N/A	28.75" x 17.05"
	42"-71"	SF670		250 lb	N/A	35.75" x 19.8"
	61"-102"	SF680		350 lb	N/A	43.75" x 29.31"
Tilt	10"-24"	ST630		80 lb	75 / 100 mm	N/A
	10"-24"	PT630		80 lb	75 / 100 mm	N/A
	10"-37"	ST632		115 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	10"-37"	PT632		115 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	13"-37"	ST635		125 lb	75 / 100 / 200x100 / 200x200 mm	9.56" x 9.47"
	23"-46"	ST640		150 lb	N/A	18" x 12.94"
	23"-46"	PT640		150 lb	N/A	17.5" x 12.94"
	23”-46”	PFT640		100 lb	N/A	17.85" x 12.94"
	32"-50"	ST650		175 lb	N/A	29.5" x 17.67"
	32"-50"	PT650		175 lb	N/A	29.06" x 17.67"
	37"-60"	ST660		200 lb	N/A	32.75" x 17.67"
	32"-60"	PT660		200 lb	N/A	29.06” x 17.67”
	37"-60"	PFT660		175 lb	N/A	32.58” x 17.05”
	42"-71"	ST670		250 lb	N/A	36.03" x 19.8"
	61"-102"	ST680		350 lb	N/A	44" x 29.31"
	23"-84"	ONE-TP		250 lb	N/A	40.8" x 26.5" (Fully Extended)

Distance From Wall	Tilt Range	Tilt Lock	Wall Plate Width	Wall Plate Height	Metal Stud Accessory	Between-Stud Knockout Dimensions (W x H)	Outside-of-Stud Knockout Dimensions (W x H)	Single/Double /Triple Stud Mounting	Catalog Page
1.0"	N/A	N/A	6.02"	5.75"	ACC215	N/A	N/A	S	12
.68"	N/A	N/A	5.59"	5.01"	ACC215	N/A	N/A	S	13
1.1"	N/A	N/A	6.02"	5.75"	ACC215	N/A	N/A	S	14
0.71"	N/A	N/A	10.43"	8.71"	ACC215	N/A	N/A	S	15
1.2"	N/A	N/A	19.37"	9.15"	ACC415	Open Wall Plate	Open Wall Plate	S,D	16
1.18"	N/A	N/A	19.25"	7.4"	ACC415	N/A	2.7" x 4"	D	17
1.7"	N/A	N/A	30.87"	9.15"	ACC415	Open Wall Plate	Open Wall Plate	D	18
1.68"	N/A	N/A	30.75"	7.4"	ACC415	N/A	11.6" x 3"	D	19
1.2"/1.7"	N/A	N/A	34.1"	9.15"	ACC415	Open Wall Plate	Open Wall Plate	D	20
1.68"	N/A	N/A	30.75"	7.4"	ACC415	2.7" x 4"	4.5" x 4"	D	21
1.73"	N/A	N/A	37.75"	7.45"	ACC615	5.5" x 4"	5.5" x 2.5"	D (up to 200 lb) or T	22
1.83"	N/A	N/A	45.75"	7.45"	ACC615	5.5" x 4"	5.5" x 2.5"	D (up to 200 lb) or T	23
1.58"	+15/-5°	15/10/5/0/-5°	5.15"	6.2"	ACC215	N/A	N/A	S	25
2.2"	+15/-5°	N/A	4.75"	4.78"	ACC215	N/A	N/A	S	26
1.66"	+15/-5°	15/10/5/0/-5°	5.15"	6.2"	ACC215	N/A	N/A	S	27
2.25"	+15/-5°	N/A	4.75"	4.78"	ACC215	N/A	N/A	S	28
2.5"	+15/-5°	15/10/5/0/-5°	10.99"	9.15"	ACC215	Open Wall Plate	Open Wall Plate	S	29
2.5"	+15/-5°	15/10/5/0/-5°	19.37"	9.15"	ACC415	Open Wall Plate	Open Wall Plate	S,D	30
2.5"	+15/-5°	15/10/5/0/-5°	19.25"	7.4"	ACC415	N/A	2.7" x 4"	D	31
1.7"	0,2,5,10°	N/A	19.25"	1.57"	ACC415	N/A	N/A	D	32
2.5"	+15/-5°	15/10/5/0/-5°	30.87"	9.15"	ACC415	Open Wall Plate	Open Wall Plate	D	33
2.5"	+15/-5°	15/10/5/0/-5°	30.75"	7.4"	ACC415	N/A	11.6" x 3"	D	34
2.5"	+15/-5°	15/10/5/0/-5°	34.1"	9.15"	ACC415	Open Wall Plate	Open Wall Plate	D	35
2.5"	+15/-5°	15/10/5/0/-5°	30.75"	7.4"	ACC415	2.7" x 4"	4.5" x 4"	D	36
2"	0,2,5,10°	N/A	34"	2.65"	ACC415	N/A	N/A	D	37
3"	+15/-5°	15/10/5/0/-5°	37.75"	7.45"	ACC615	5.5" x 4"	5.5" x 2.5"	D (up to 200 lb) or T	38
3"	+15/-5°	15/10/5/0/-5°	45.75"	7.45"	ACC615	5.5" x 4"	5.5" x 2.5"	D (up to 200 lb) or T	39
3.2"	+15/-5°	15/10/5/0/-5°	43"	7.7"	ACC415 or ACC615	6" x 3.7"	2" x 2"; 3.5" x 2"	S, D (up to 200 lb), or T	40

Flat Panel

Product Type	Flat Panel Screen Size Range	Model	Picture	Max Load	VESA® Pattern	Adjustable Mounting Pattern (Width x Height)
Pivot	10"-22"	SP730P		25 lb	75 / 100 mm	N/A
	10"-22"	PP730P		25 lb	75 / 100 mm	N/A
	22"-40"	SP740P		80 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	22"-40"	PP740P		80 lb	75 / 100 / 200x100 / 200x200 mm	N/A
Pull-Out Swivel	26"-58"	SP850-UNL		150 lb	100 / 200x100 mm	28.75" x 17.05"
Articulating	10"-22"	LCS-KLA		25 lb	75 / 100 mm	N/A
	10"-22"	PA730		25 lb	75 / 100 mm	N/A
	10"-22"	SA730P		25 lb	75 / 100 mm	N/A
	10"-22"	SAL730P		25 lb	75 / 100 mm	N/A
	22"-40"	SA740P		80 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	22"-40"	PA740P		80 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	32"-45"	SA745PU		90 lb	75 / 100 / 200x100 / 200x200 mm	30.13" x 17.24"
	32"-50"	SA750PU		150 lb	75 / 100 / 200x100 / 200x200 mm	30.13" x 17.24"
	37"-63"	SA760PU		200 lb	75 / 100 / 200x100 / 200x200 mm	30.13" x 17.24"
	32"-50"	PLA50-UNL		150 lb	N/A	28.75" x 17.05"
	37"-60"	PLA60-UNL		175 lb	N/A	28.75" x 17.05"
	37"-60"	PLAV60-UNL		175 lb	N/A	28.75" x 17.05"
	42"-60"	PLAV70-UNL		200 lb	N/A	28.75" x 17.05"
In-Wall	22"-40"	IM740P		80 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	32"-60"	IM760PU		200 lb	100 / 200x100 / 200x200 mm	28.7" x 17"
Ceiling	15"-24"	PC930		80 lb	75 / 100 mm	N/A
	13"-29"	LCC-18/36		40 lb	75 / 100 mm	N/A
	15”-37"	PC932		80 lb	75 / 100 / 200x100 / 200x200 mm	N/A
	32"-60"	PLCM-UNL-CP		150 lb	N/A	28.75" x 17.05"
Stands	32"-50"	SS550		250 lb	N/A	28.75" x 17.05"
Carts	32"-60"	SR560		250 lb	N/A	28.75" x 17.05"

Distance From Wall	Tilt Range	Tilt Lock	Wall Plate Width	Wall Plate Height	Metal Stud Accessory	Between-Stud Knockout Dimensions (W x H)	Outside-of-Stud Knockout Dimensions (W x H)	Single/Double /Triple Stud Mounting	Catalog Page
1.9"-6.86"	+/-35°	N/A	2.2"	5.5"	ACC908	N/A	N/A	S	42
1.88"-7.01"	+/-35°	N/A	2.25"	5.5"	ACC908	N/A	N/A	S	43
2.97"-10.05"	+15/-5°	N/A	2.2"	5.5"	WSP490	N/A	N/A	S	44
2.93"-8.13"	+15/-5°	N/A	2.25"	5.5"	WSP490	N/A	N/A	S	45
3.4"-11.9"	+10/0°	10/5/0°	21"	9.76"	N/A	6" x 4.7"	N/A	D	46
2"-14.59"	+/-35°	N/A	2.2"	5.5"	ACC908	N/A	N/A	S	50
1.23"-14.4"	+/-35°	N/A	2.25"	5.5"	ACC908	N/A	N/A	S	49
1.9"-15.86"	+/-35°	N/A	2.2"	5.5"	ACC908	N/A	N/A	S	48
1.9"-19.11"	+/-35°	N/A	2.2"	5.5"	ACC908	N/A	N/A	S	51
2.72"-20.19"	+15/-5°	N/A	2.2"	7.5"	WSP models	N/A	N/A	S	52
2.93"-15.6"	+15/-5°	N/A	2.25"	8.63"	WSP models	N/A	N/A	S	53
6.8"-29.8"	+15/-5°	N/A	4.8"	14.5"	Contact Customer Care	N/A	N/A	S	54
6.8"-29.8"	+15/-5°	N/A	21.4"	14.5"	Contact Customer Care	6.6" x 5"	N/A	D	55
6.8"-29.8"	+15/-5°	N/A	21.4"	14.5"	Contact Customer Care	6.6" x 5"	N/A	D	56
5.6"-30.4"	+10/-5°	N/A	19.75"	7.3"	N/A	12" x 3.8"	N/A	D	57
5.6"-32.3"	+10/-5°	N/A	19.75"	13.5"	N/A	13" x 3.2" top 12" x 3.8" bottom	N/A	D	58
5.6"-32.3"	+10/-5°	N/A	19.75"	13.5"	N/A	13" x 3.2" top 12" x 3.8" bottom	N/A	D	59
5.6"-30.4"	+10/-5°	N/A	19.75"	13.5"	N/A	13" x 3.2" top 12" x 3.8" bottom	N/A	D	60
.08"-16.69"	+15/-5°	N/A	14.5"	14.5"	N/A	N/A	N/A	D	62
1.6"-19.38"	+15/-5°	N/A	14.5"	16.45"	N/A	N/A	N/A	D	63
N/A	+15/-5°	15/10/5/0/-5°	N/A	N/A	N/A	N/A	N/A	N/A	64
N/A	+20/-5°	N/A	N/A	N/A	N/A	N/A	N/A	N/A	65
N/A	+15/-5°	15/10/5/0/-5°	N/A	N/A	N/A	N/A	N/A	N/A	66
N/A	+20/0°	N/A	N/A	N/A	N/A	N/A	N/A	N/A	67
N/A	+5/-2°	-2/0/5°	N/A	N/A	N/A	N/A	N/A	N/A	77
N/A	+5/-2°	-2/0/5°	N/A	N/A	N/A	N/A	N/A	N/A	80

Flat Panel

SmartMount®
Universal Flat Wall Mount

For 10" to 24" LCD Screens

- VESA® 75 and 100 compliant
- Non-VESA® screen adapter plates also available
- Ultra-slim design holds screen 1" away from the wall
- Screen adapter plate simply hooks onto wall plate for quick and easy installation

MODELS

Universal Models:

Security Fasteners*

SF630	Black
SF630-S	Silver

Standard Fasteners**

SF630P	Black
SF630P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
6.02" x 5.75" x 1.0"
(15.3 x 14.6 x 2.5 cm)

Max Load: 80 lb (36.2 kg)

Ship Weight: 2.5 lb (1.13 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

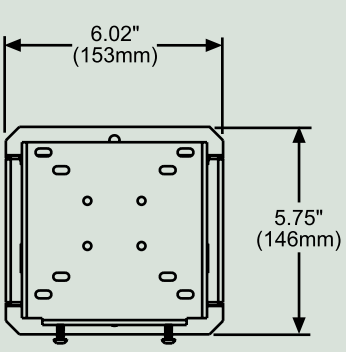

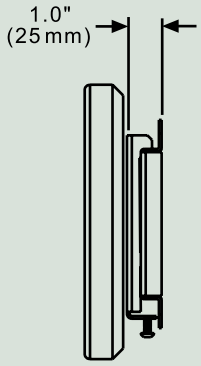

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Universal Flat Wall Mount

For 10" to 24" LCD Screens

- VESA® 75 and 100 compliant
- Ultra-slim design holds screen .68" from the wall
- Screen adapter plate simply slides into the wall plate for quick and easy installation

* Includes standard hardware (hex or Phillips) for attaching screen to mount

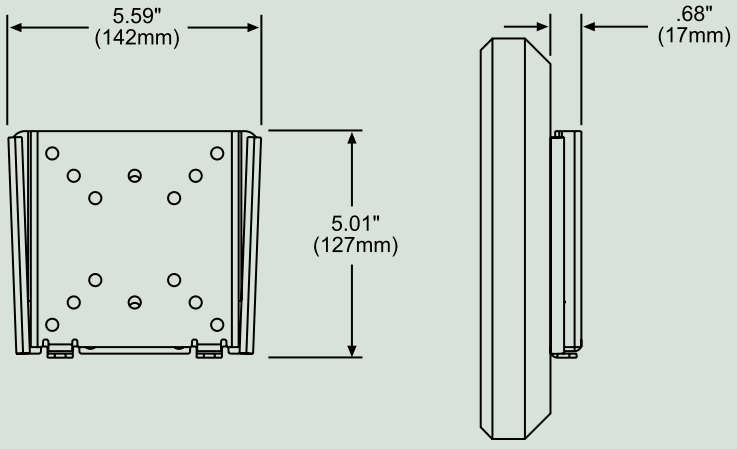

MODELS

Universal Models:
Standard Fasteners*

PF630 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 5.59" x 5.01" x .68" (14.2 x 12.7 x 1.7 cm)
Max Load:	80 lb (36.2 kg)
Ship Weight:	1.7 lb (.77 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®
Universal Flat Wall Mount

For 10" to 37" LCD Screens

- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Non-VESA® screen adapter plates also available
- Ultra-slim design holds screen 1.1" away from the wall
- Screen adapter plate simply hooks onto wall plate for quick and easy installation



* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Security Fasteners*

SF632	Black
SF632-S	Silver

Standard Fasteners**

SF632P	Black
SF632P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75,100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
8.75" x 9.35" x 1.1"
(22.2 x 23.7 x 2.7 cm)

Max Load: 115 lb (52.1 kg)

Ship Weight: 4 lb (1.81 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

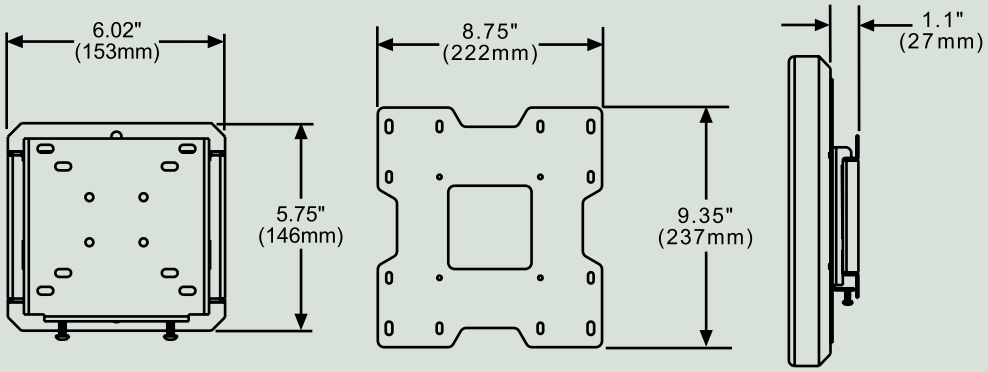

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Universal Flat Wall Mount

For 10" to 37" LCD Screens

- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Ultra-slim design holds screen .71" from the wall
- Screen adapter plate simply slides into the wall plate for quick and easy installation

* Includes standard hardware (hex or Phillips) for attaching screen to mount

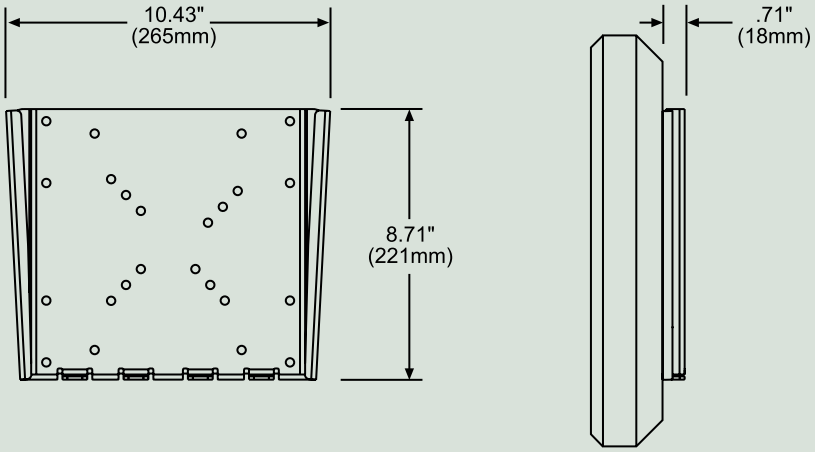

MODELS

Universal Models:
Standard Fasteners*

PF632 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 10.43" x 8.71" x .71" (26.5 x 22.1 x 1.8 cm)
Max Load:	115 lb (52.1 kg)
Ship Weight:	5.1 lb (2.31 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®
Universal Flat Wall Mount

For 23" to 46" LCD Screens

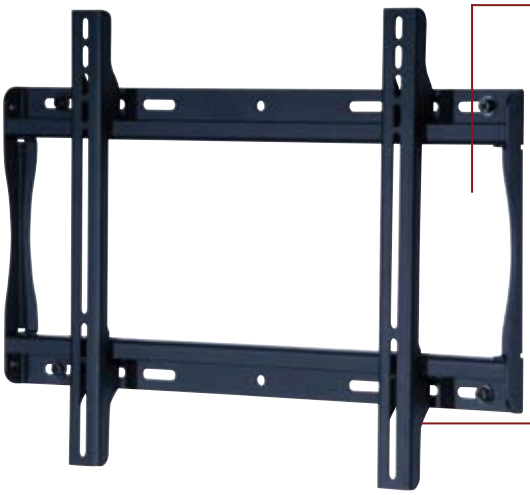

- Open wall plate design allows for total wall access, increasing electrical and cable management options
- Slim design holds screen only 1.2" from the wall
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Horizontal screen adjustment up to 6" for centering screen on wall
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 17.73"W and 12.94"H

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Security Fasteners*

SF640	Black
SF640-S	Silver

Standard Fasteners**

SF640P	Black
SF640P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 17.73" horizontally and 12.94" vertically

Many 42" plasmas have mounting hole patterns larger than dimensions above. Use MountFinder™ to verify mount compatibility.

SPECIFICATIONS

Dimensions: (W x H x D)
19.37" x 13.75" x 1.2"
(49.9 x 34.9 x 3.0 cm)

Max Load: 150 lb (68 kg)

Ship Weight: 5.7 lb (2.58 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

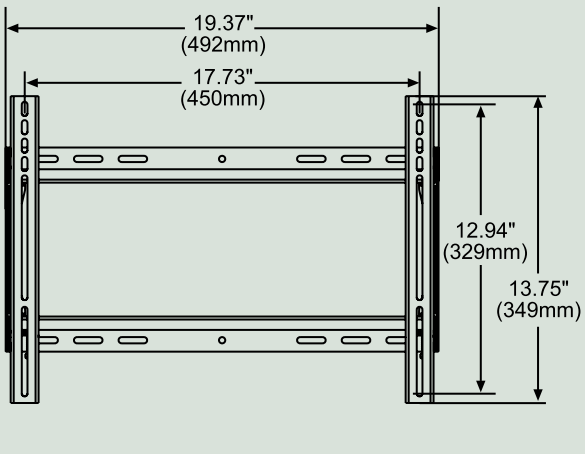

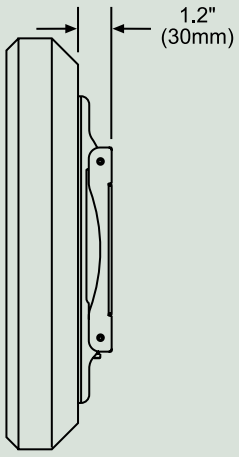

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Universal Flat Wall Mount

For 23" to 46" LCD Screens

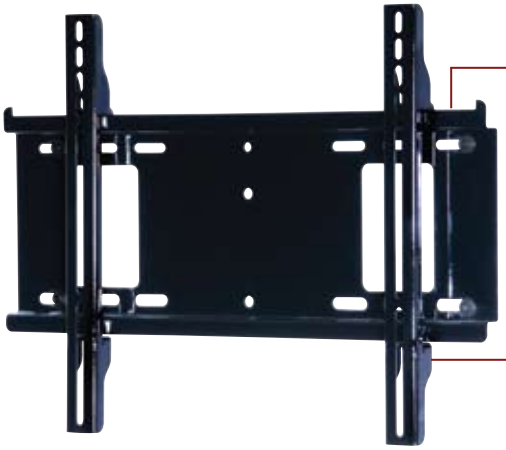

- Slim design holds screen only 1.18" from the wall
- Horizontal screen adjustment up to 6", for centering screen on wall
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 17.25"W and 12.94"H

* Includes standard hardware (hex or Phillips) for attaching screen to mount

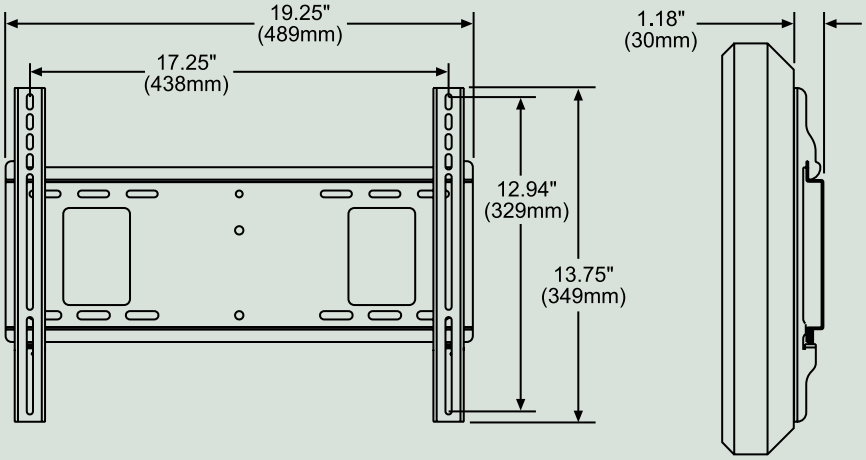

MODELS

Universal Models:
Standard Fasteners*

PF640 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 17.25" horizontally and 12.94" vertically

Many plasmas have mounting hole patterns larger than dimensions above. Use MountFinder™ to verify mount compatibility.

SPECIFICATIONS

Dimensions:	(W x H x D) 19.25" x 13.75" x 1.18" (48.9 x 34.9 x 3.0 cm)
Max Load:	150 lb (68 kg)
Ship Weight:	5.6 lb (2.54 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

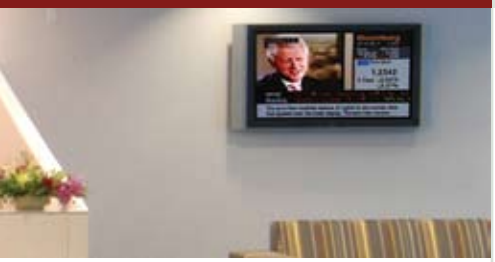

SmartMount®

Universal Flat Wall Mount

For 32" to 50" LCD and Plasma Screens

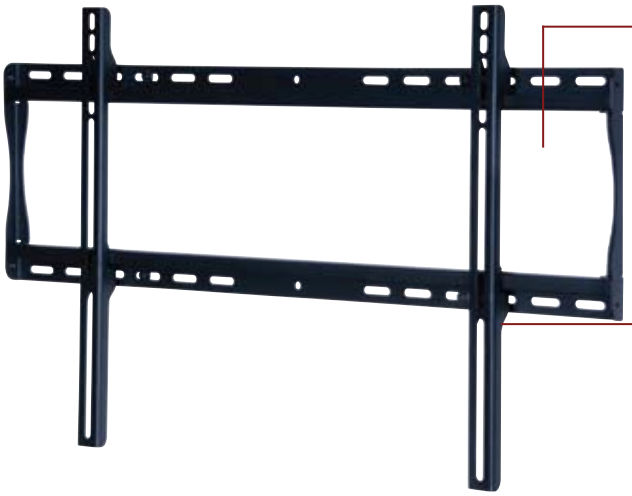

- Open wall plate design allows for total wall access increasing electrical and cable management options
- Slim design holds screen only 1.7" from the wall
- Easy-glide bracket design ensures screen is securely attached to wall plate

- Horizontal screen adjustment up to 8", for centering screen on wall
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 29.23"W and 17.05"H

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:

Security Fasteners*

SF650	Black
SF650-S	Silver

Standard Fasteners**

SF650P	Black
SF650P-S	Silver

SCREEN ADAPTER

Universal Models:

Includes universal screen adapter to accommodate mounting holes spaced up to 29.23" horizontally and 17.05" vertically

SPECIFICATIONS

Dimensions: (W x H x D) 30.87" x 18" x 1.7" (78.4 x 45.7 x 4.3 cm)

Max Load: 175 lb (79.3 kg)

Ship Weight: 8 lb (3.62 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

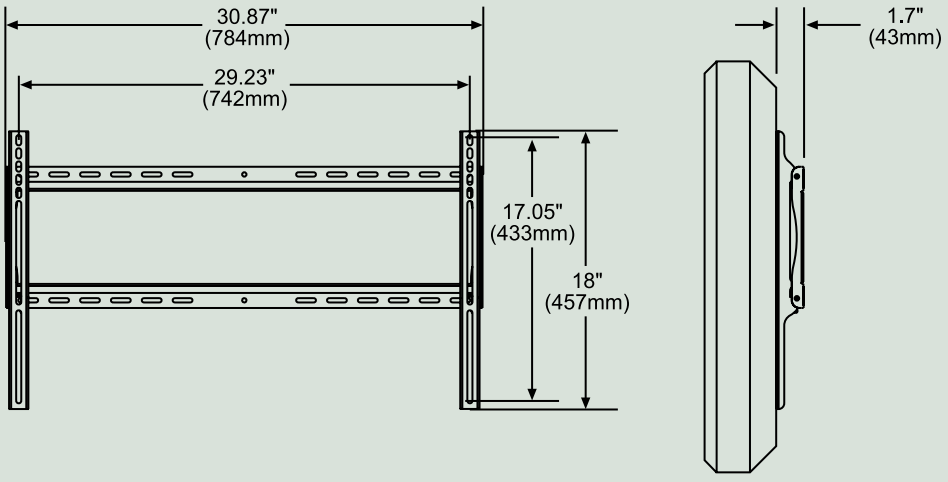

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Universal Flat Wall Mount

For 32" to 50" LCD and Plasma Screens

- Open wall plate design allows for greater wall access and cable management
- Slim design holds screen only 1.68" from the wall
- Horizontal screen adjustment up to 8", for centering screen on wall
- Easy-glide bracket design ensures screen is securely attached to wall plate

- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 28.75"W and 17.05"H

* Includes standard hardware (hex or Phillips) for attaching screen to mount

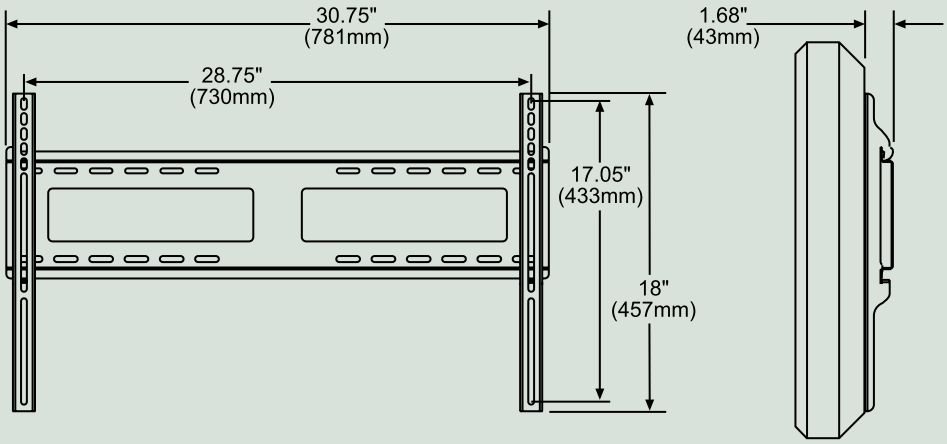

MODELS

Universal Models:
Standard Fasteners*

PF650 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.75" horizontally and 17.05" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 30.75" x 18" x 1.68" (78.1 x 45.7 x 4.3 cm)
Max Load:	175 lb (74.3 kg)
Ship Weight:	9.88 lb (4.48 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®

Universal Flat Wall Mount

For 37" to 60" LCD and Plasma Screens

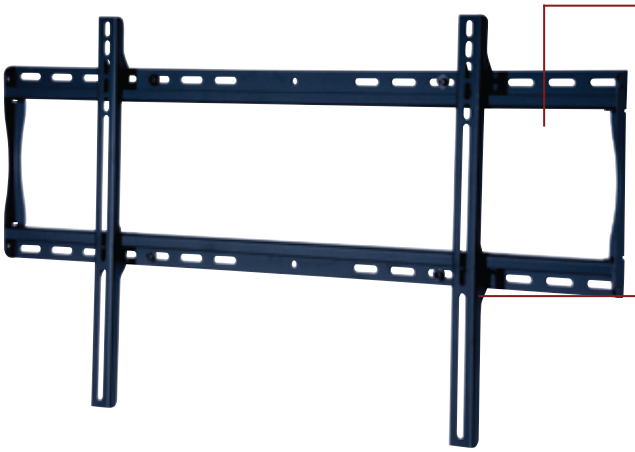

- Open wall plate design allows for total wall access increasing electrical and cable management options
- Includes two sets of screen adapters: Shallow adapters keep screen 1.2" from wall. Deep brackets provide 1.7" of room for plugs and extra ventilation
- Easy-glide bracket design ensures screen is securely attached to wall plate

- Horizontal screen adjustment up to 8", for centering screen on wall
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 32.48"W and 17.05"H, including VESA® 800 x 400 mm

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Security Fasteners*

SF660	Black
SF660-S	Silver

Standard Fasteners**

SF660P	Black
SF660P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 32.48" horizontally and 17.05" vertically

SPECIFICATIONS

Dimensions: (W x H x D) 34.12" x 18" x 1.2" (86.7 x 45.7 x 3 cm)

Max Load: 200 lb (90.7 kg)

Ship Weight: 9.4 lb (4.26 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

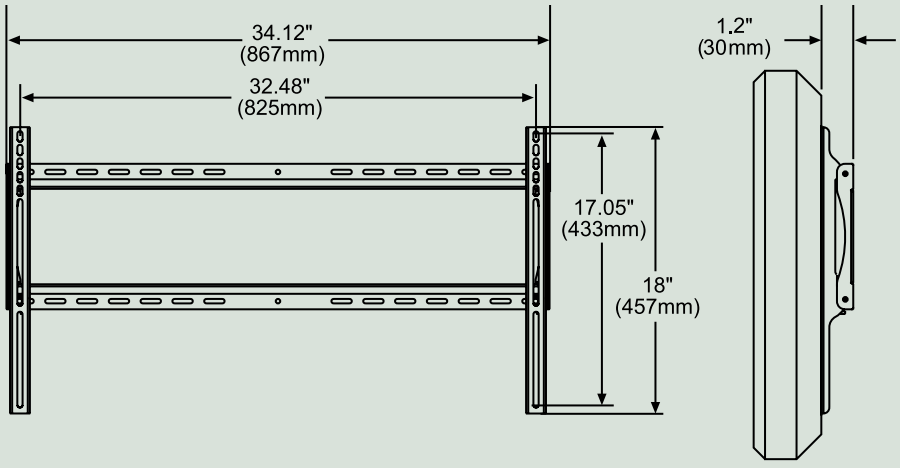

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Universal Flat Wall Mount

For 32" to 60" LCD and Plasma Screens

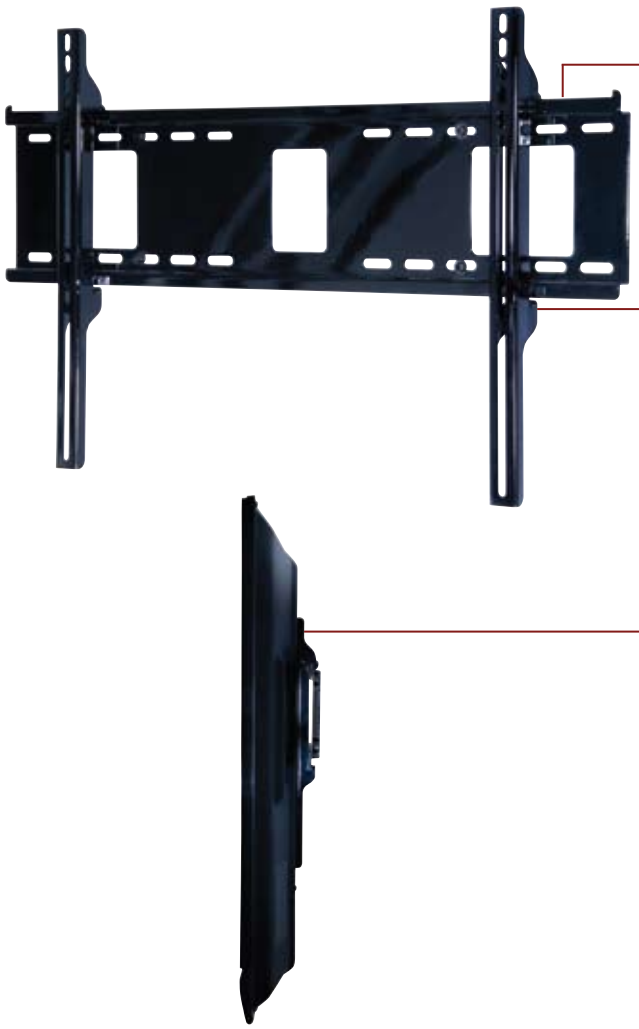

- Slim design holds screen only 1.68" from the wall
- Horizontal screen adjustment up to 8", for centering screen on wall
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 28.75"W and 17.05"H

* Includes standard hardware (hex or Phillips) for attaching screen to mount

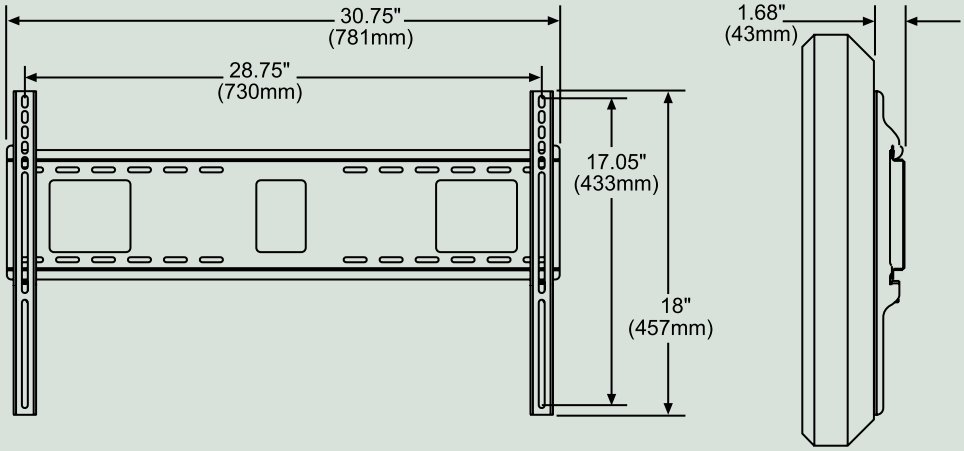

MODELS

Universal Models:
Standard Fasteners*

PF660 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.75" horizontally and 17.05" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 30.75" x 18" x 1.68" (78.1 x 45.7 x 4.3 cm)
Max Load:	200 lb (90.7 kg)
Ship Weight:	9.88 lb (4.48 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®

Universal Flat Wall Mount

For 42” to 71” LCD and Plasma Screens

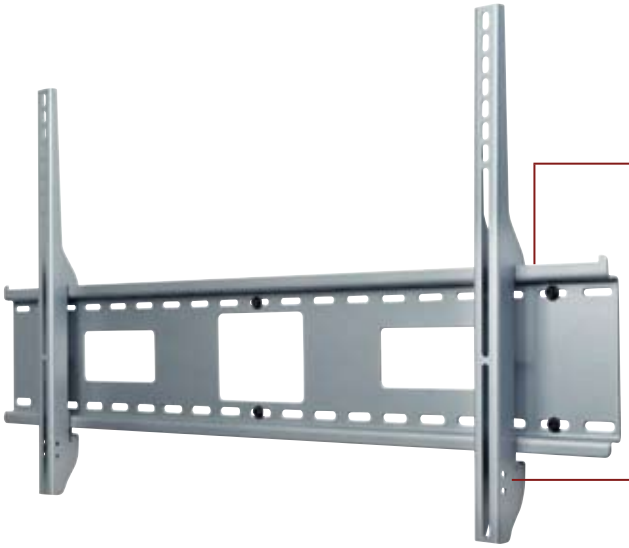

- Ultra-slim design holds screen only 1.73" from the wall
- Horizontal screen adjustment up to 8"
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 35.75"W and 19.8"H

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Security Fasteners*

SF670	Black
SF670-S	Silver

Standard Fasteners**

SF670P	Black
SF670P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 35.75" horizontally and 19.8" vertically

SPECIFICATIONS

Dimensions: (W x H x D)
37.75" x 20.63" x 1.73"
(95.9 x 52.4 x 4.4 cm)

Max Load: 250 lb (113.4 kg)

Ship Weight: 13.1 lb (5.94 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC615: 6-pack Metal Stud Fastener Kit 142

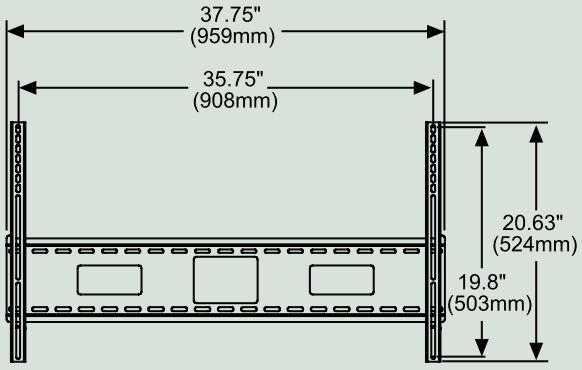

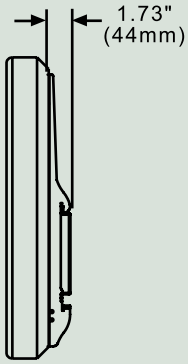

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Universal Flat Wall Mount

For 61" to 102" LCD and Plasma Screens

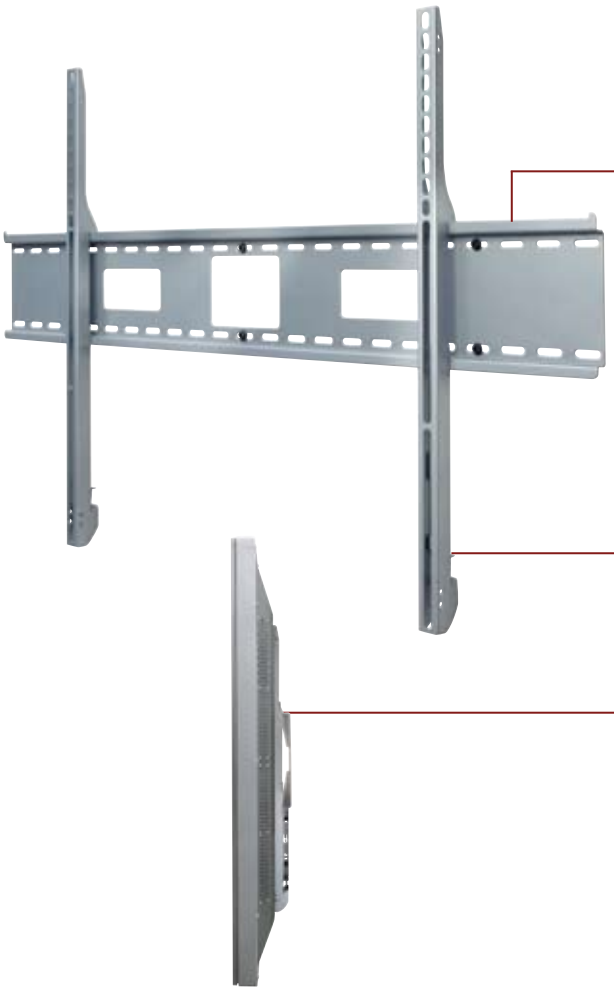

- Ultra slim design holds screen 1.83" away from the wall
- Horizontal screen adjustment up to 8"
- Safety latch ensures screen is securely attached to wall plate
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns up to 43.75"W and 29.31"H

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

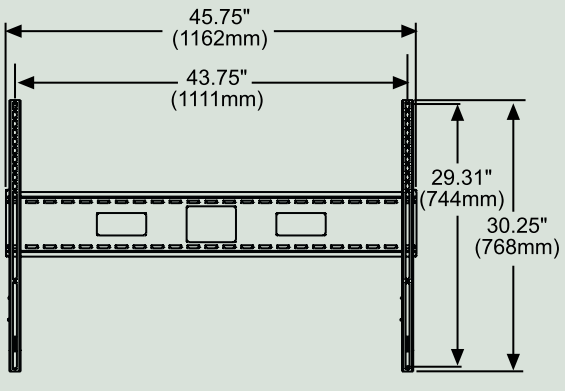

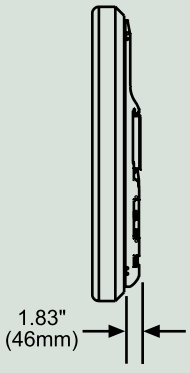

MODELS

Universal Models:
Security Fasteners*

SF680	Black
SF680-S	Silver

Standard Fasteners**

SF680P	Black
SF680P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 43.75" horizontally and 29.31" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 45.75" x 30.25" x 1.83" (116.2 x 76.8 x 4.6 cm)
Max Load:	350 lb (158.8 kg)
Ship Weight:	16.5 lb (7.48 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC615: 6-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

MODELS

Dedicated Models:
Security Fasteners*
Screen Adapter Purchased Separately**

SF16D	for up to 16" studs	Black
SF24D	for up to 24" studs	Black

SCREEN ADAPTER

Dedicated Models:
Requires screen-specific PLP or LC adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
SF16D	19.25" x 9.83" x 1.18" (48.9 x 25.0 x 3.0 cm)
SF24D	30.75" x 9.83" x 1.18" (78.1 x 25.0 x 3.0 cm)
Max Load:	200 lb (90.7 kg)
Ship Weight:	
SF16D	7.4 lb (3.4 kg)
SF24D	9.3 lb (4.2 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

c UL us

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

Screen-specific Flat Wall Mount

For up to 71" LCD and Plasma Screens

SF24D

- Measures 1.18" from wall, plus thickness of adapter plate
- Horizontal screen adjustment up to 8"
- Easy-glide bracket design ensures screen is securely attached to wall plate

SF16D

- Choose from 16" only or 16"–24" stud center wall plate
- Fits any screen-specific PLP or LC adapter plate
- Model SF16D ships with 19.25"-wide wall plate, perfect for portrait style installations

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

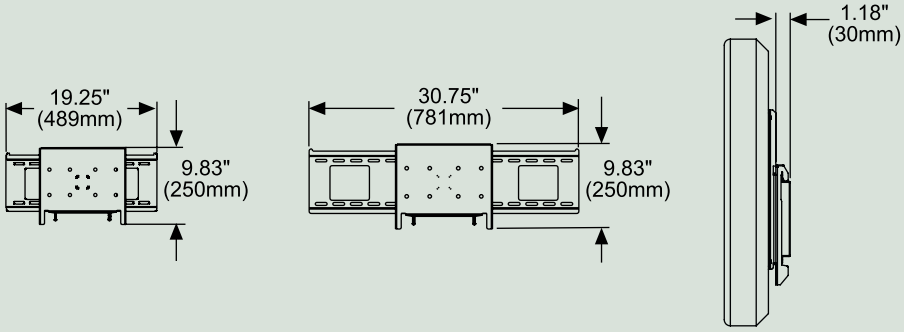

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Universal Tilt Wall Mount

For 10" to 24" LCD Screens

- VESA® 75 and 100 compliant
- Non-VESA® screen adapter plates also available
- One-touch tilt allows adjustment of +15/-5° without use of tools
- Screen adapter plate simply hooks onto wall plate for quick and easy installation

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Security Fasteners*

ST630	Black
ST630-S	Silver

Standard Fasteners**

ST630P	Black
ST630P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
5.15" x 6.2" x 1.58"
(13.1 x 15.7 x 4 cm)

Tilt: +15/-5°

Max Load: 80 lb (36.2 kg)

Ship Weight: 2.9 lb (1.31 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142





To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

MODELS

Universal Models:
Standard Fasteners*

PT630 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 4.75" x 4.78" x 2.2" (12.1 x 12.1 x 5.6 cm)
Tilt:	+15/-5°
Max Load:	80 lb (36.2 kg)
Ship Weight:	2.2 lb (.99 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

PARAMOUNT™ by Peerless

Universal Tilt Wall Mount

For 10" to 24" LCD Screens

- VESA® 75 and 100 compliant
- +15/-5° tilt for viewing angle adjustment
- Slim design holds screen 2.2" from the wall
- Screen adapter plate simply hooks onto the wall plate for quick and easy installation

* Includes standard hardware (hex or Phillips) for attaching screen to mount



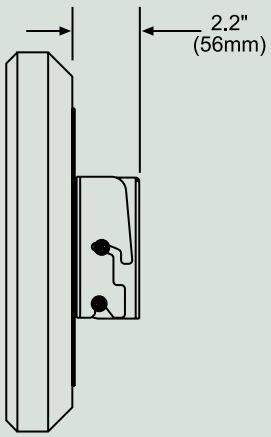

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Universal Tilt Wall Mount

For 10" to 37" LCD Screens

- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Non-VESA® screen adapter plates also available
- One-touch tilt allows adjustment of +15/-5° without use of tools
- Screen adapter plate simply hooks onto wall plate for quick and easy installation

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

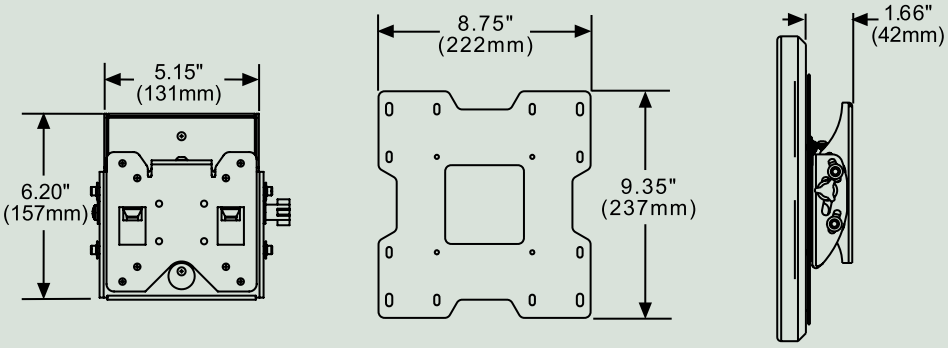

MODELS

Universal Models:
Security Fasteners*

ST632	Black
ST632-S	Silver

Standard Fasteners**

ST632P	Black
ST632P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 8.75" x 9.35" x 1.66" (22.2 x 23.7 x 4.2 cm)
Tilt:	+15/-5°
Max Load:	115 lb (52.1 kg)
Ship Weight:	4.4 lb (1.99 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Flat Panel

MODELS

Universal Models:
Standard Fasteners*

PT632 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200mm mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 8.75" x 9.35" x 2.25" (22.2 x 23.6 x 5.7 cm)
Tilt:	+15/-5°
Max Load:	115 lb (52.1 kg)
Ship Weight:	3.5 lb (1.58 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

PARAMOUNT™ by Peerless

Universal Tilt Wall Mount

For 10" to 37" LCD Screens

- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- +15/-5° tilt for viewing angle adjustment
- Slim design holds screen 2.25" from the wall
- Screen adapter plate simply hooks onto the wall plate for quick and easy installation

* Includes standard hardware (hex or Phillips) for attaching screen to mount

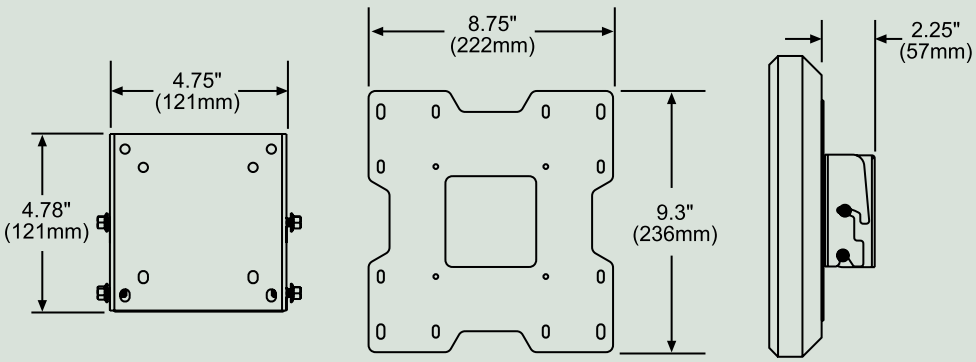

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Universal Tilt Wall Mount

For 13" to 37" LCD Screens

- Open wall plate design allows for total wall access, increasing electrical and cable management options
- Pre-tensioned universal tilt bracket allows for +15/-5° tilt adjustment in one easy motion
- Optional tilt lock in 5° increments
- Easy-grip ratcheting handle locks angle into place

- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns: 9.63"W x 9.45"H, including VESA® 75, 100, 200 x 100, and 200 x 200 mm

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

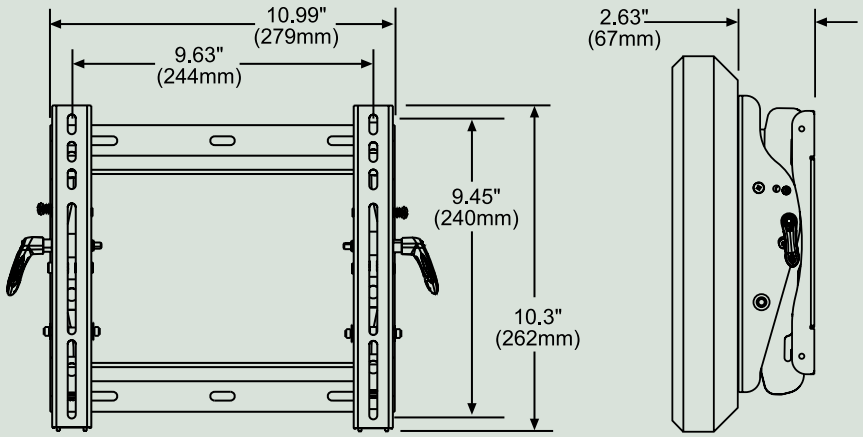

MODELS

Universal Models:
Security Fasteners*

ST635	Black
ST635-S	Silver

Standard Fasteners**

ST635P	Black
ST635P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 9.63" horizontally and 9.45" vertically including VESA® 75, 100, 200 x 100, 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 10.99" X 10.3" X 2.63" (27.9 X 26.2 X 6.7 cm)
Tilt:	+15/-5°
Max Load:	125 lb (56.6 kg)
Ship Weight:	6.6 lb (2.99 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®

Universal Tilt Wall Mount

For 23" to 46" LCD Screens

- Open wall plate design allows for total wall access, increasing electrical and cable management options
- Pre-tensioned universal tilt bracket allows for +15/-5° tilt adjustment in one easy motion
- Optional tilt lock in 5° increments
- Easy-grip ratcheting handle locks angle into place

- Horizontal screen adjustment up to 6"
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting patterns: 18"W x 12.94"H

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:

Security Fasteners*

ST640	Black
ST640-S	Silver

Standard Fasteners**

ST640P	Black
ST640P-S	Silver

SCREEN ADAPTER

Universal Models:

Includes universal screen adapter to accommodate mounting holes spaced up to 18" horizontally and 12.94" vertically

Many 42" plasmas have mounting hole patterns larger than dimensions above. Use MountFinder™ to verify mount compatibility.

SPECIFICATIONS

Dimensions:	(W x H x D) 19.37" x 13.75" x 2.6" (49.2 x 34.9 x 6.6 cm)
Tilt:	+15/-5°
Max Load:	150 lb (68 kg)
Ship Weight:	8.5 lb (3.85 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

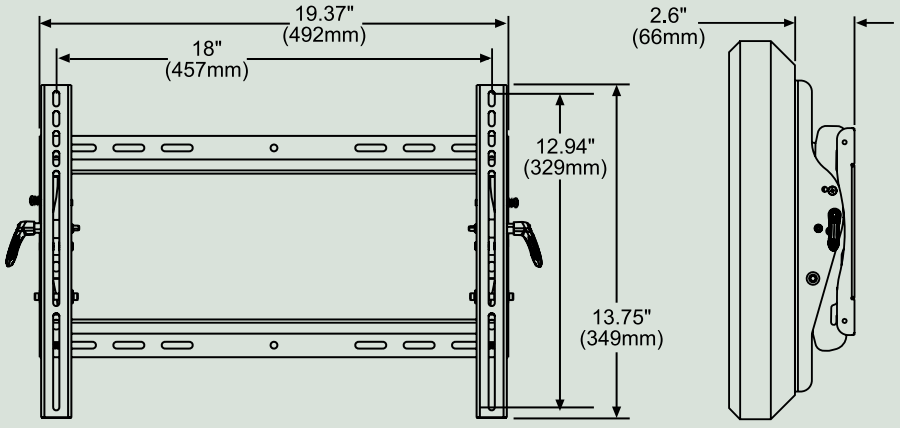

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Universal Tilt Wall Mount

For 23" to 46" LCD Screens

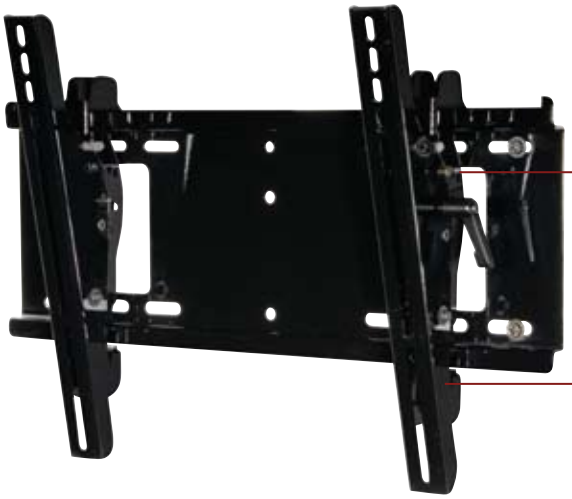

- One-touch tilt allows adjustment of +15/-5°
- Optional tilt lock in 5° increments
- Horizontal screen adjustment up to 6"
- Easy-glide bracket design ensures screen is securely attached to wall plate

- Universal brackets easily hook onto the wall plate for fast installation
- Fits screens with mounting hole patterns up to 17.5"W and 12.94"H

* Includes standard hardware (hex or Phillips) for attaching screen to mount

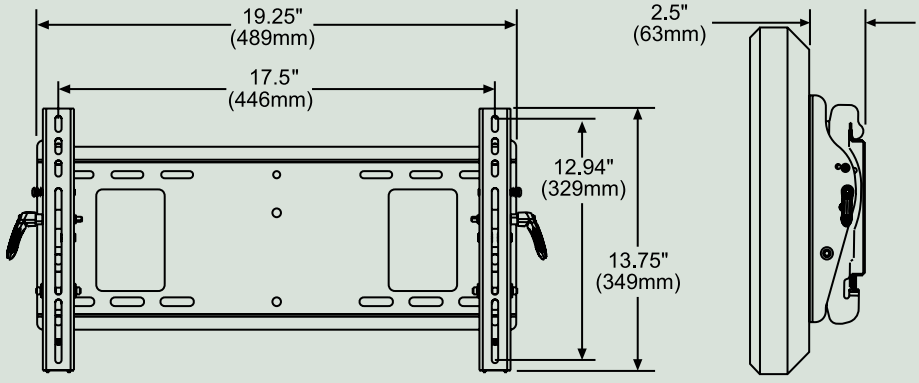

MODELS

Universal Models:
Standard Fasteners*

PT640 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 17.54" horizontally and 12.94" vertically

Many 42" plasmas have mounting hole patterns larger than dimensions above. Use MountFinder™ to verify mount compatibility

SPECIFICATIONS

Dimensions:	(W x H x D) 19.25" x 13.75" x 2.5" (48.9 x 34.9 x 6.3 cm)
Tilt:	+15/-5°
Max Load:	150 lb (68 kg)
Ship Weight:	8 lb (3.6 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

Flat Panel

MODELS

Universal Models:
Standard Fasteners*

PFT640 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 17.85" horizontally and 12.94" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 19.25" x 13.75" x1.7" (48.9 x 34.9 x 4.3 cm)
Fixed Tilt:	0°, 2°, 5° and 10°
Max Load:	100 lb (45.3 kg)
Ship Weight:	3.8 lb (1.72 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item

ACCESSORIES pg#

ACC215: 2-pack Metal Stud Fastener Kit 142

PARAMOUNT™ by Peerless

Universal Fixed Tilt Wall Mount

For 23" to 46" LCD Screens

- Single rail design enables quick and simple installation
- Slim design holds screen only 1.7" from wall
- Safety tab ensures screen is securely attached to wall plate
- Integrated tilt feature with fixed angles of 0°, 2°, 5° and 10° for increased functionality and viewing flexibility
- Horizontal screen adjustment up to 6", for centering screen on wall

0° configuration 10° configuration

* Includes standard hardware (hex or Phillips) for attaching screen to mount

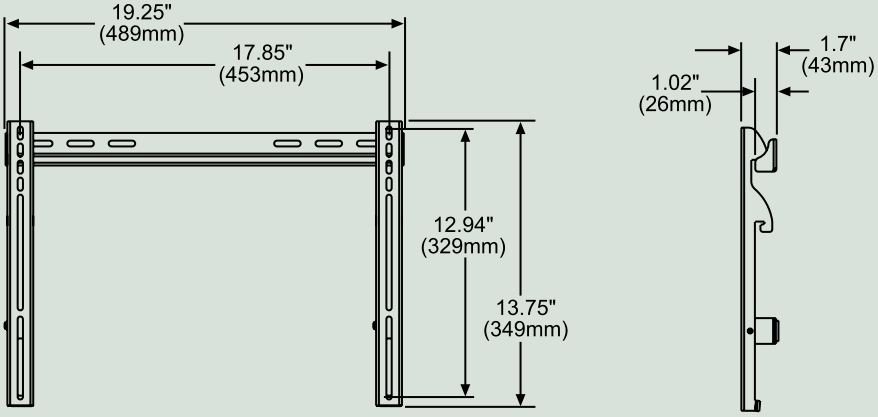

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Universal Tilt Wall Mount

For 32" to 50" LCD and Plasma Screens

- Open wall plate design allows for total wall access, increasing electrical access and cable management options
- Pre-tensioned universal tilt bracket allows for +15/-5° tilt adjustment in one easy motion
- Optional tilt lock in 5° increments
- Easy-grip ratcheting handle locks angle into place

- Horizontal screen adjustment up to 8"
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting patterns 29.5" x 17.67"

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

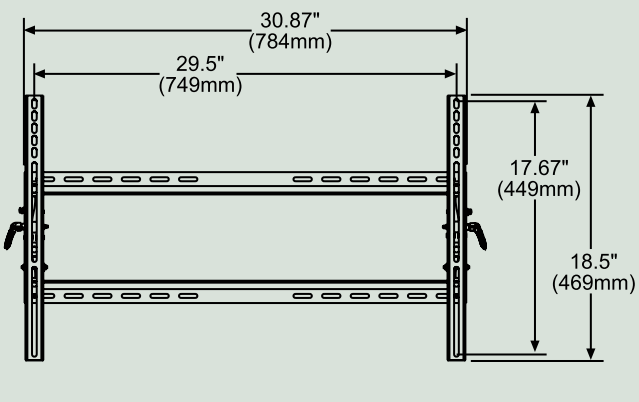

MODELS

Universal Models:
Security Fasteners*

ST650	Black
ST650-S	Silver

Standard Fasteners**

ST650P	Black
ST650P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 29.5" horizontally and 17.67" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 30.87" x 18.5" x 2.6" (78.4 x 46.9 x 6.3 cm)
Tilt:	+15/-5°
Max Load:	175 lb (79 kg)
Ship Weight:	10.5 lb (4.76 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Flat Panel

MODELS

Universal Models:
Standard Fasteners*

PT650 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 29.06" horizontally and 17.67" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 30.75" x 18.5" x 2.5" (78.1 x 47 x 6.3 cm)
Tilt:	+15/-5°
Max Load:	175 lb (79.3 kg)
Ship Weight:	10.5 lb (4.76 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

PARAMOUNT™ by Peerless

Universal Tilt Wall Mount

For 32" to 50" LCD and Plasma Screens

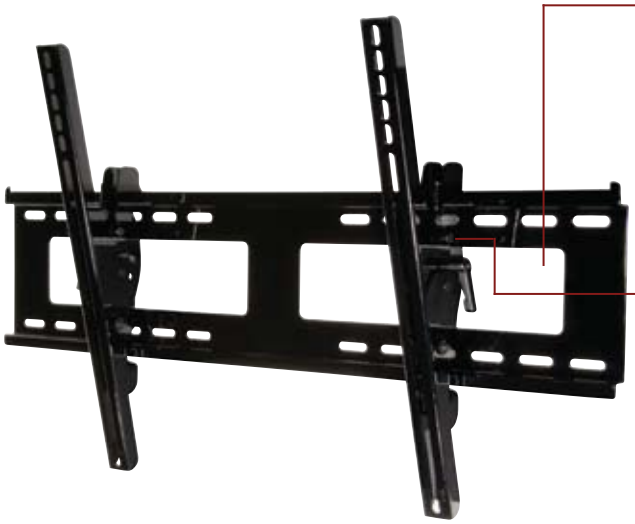

- Open wall plate design allows for greater wall access and cable management
- One-touch tilt allows adjustment of +15/-5°
- Optional tilt lock in 5° increments
- Horizontal screen adjustment up to 8"

- Easy-glide bracket design ensures screen is securely attached to wall plate
- Universal brackets easily hook onto the wall plate for fast installation
- Fits screens with mounting hole patterns up to 29.06" W and 17.67" H

* Includes standard hardware (hex or Phillips) for attaching screen to mount

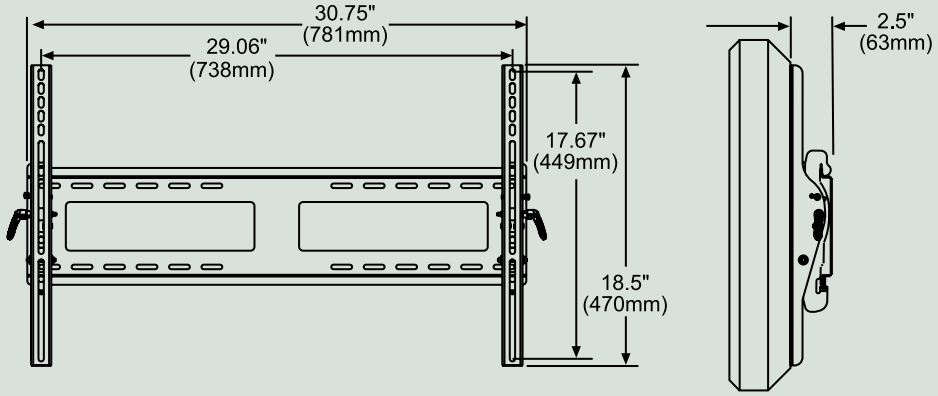

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Universal Tilt Wall Mount

For 37" to 60" LCD and Plasma Screens

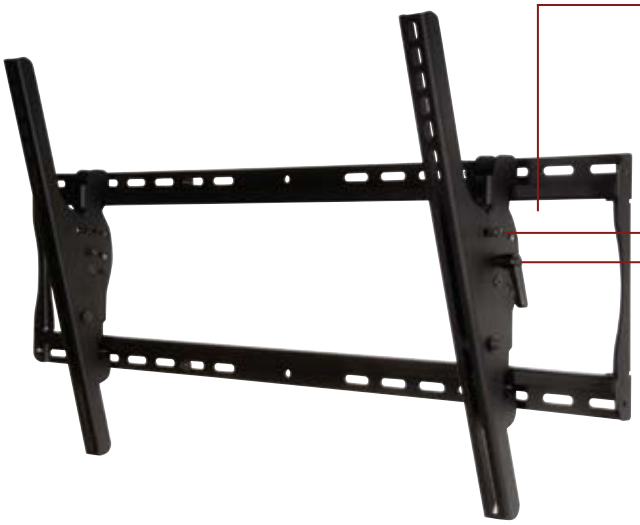

- Open wall plate design allows for total wall access, increasing electrical access and cable management options
- Pre-tensioned universal tilt bracket allows for +15/-5° tilt adjustment in one easy motion
- Optional tilt lock in 5° increments
- Easy-grip ratcheting handle locks angle into place

- Horizontal screen adjustment up to 8"
- Universal brackets easily hook onto wall plate for fast installation
- Fits screens with mounting hole patterns of 32.75" x 17.67", including VESA® 800 x 400 mm

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

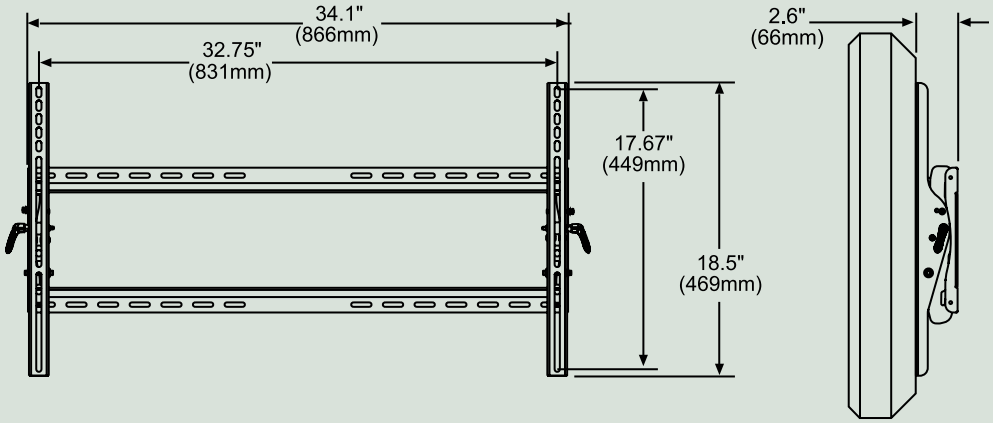

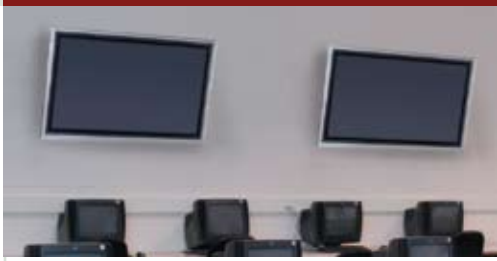

MODELS

Universal Models:
Security Fasteners*

ST660	Black
ST660-S	Silver

Standard Fasteners**

ST660P	Black
ST660P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 32.75" horizontally and 17.67" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 34.1" x 18.5" x 2.6" (86.6 x 46.9 x 6.6 cm)
Tilt:	+15/-5°
Max Load:	200 lb (90.7 kg)
Ship Weight:	10.9 lb (4.94 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Flat Panel

PARAMOUNT™ by Peerless

Universal Tilt Wall Mount

For 32" to 60" LCD and Plasma Screens

- One-touch tilt allows adjustment of +15/-5°
- Optional tilt lock in 5° increments
- Horizontal screen adjustment up to 8"
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Universal brackets easily hook onto the wall plate for fast installation
- Fits screens with mounting hole patterns up to 29.06" W and 17.67" H

* Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Standard Fasteners*

PT660 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 29.06" horizontally and 17.67" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 30.75" x 18.5" x 2.5" (78.1 x 47 x 6.3 cm)
Tilt:	+15/-5°
Max Load:	200 lb (90.8 kg)
Ship Weight:	10.5 lb (4.76 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

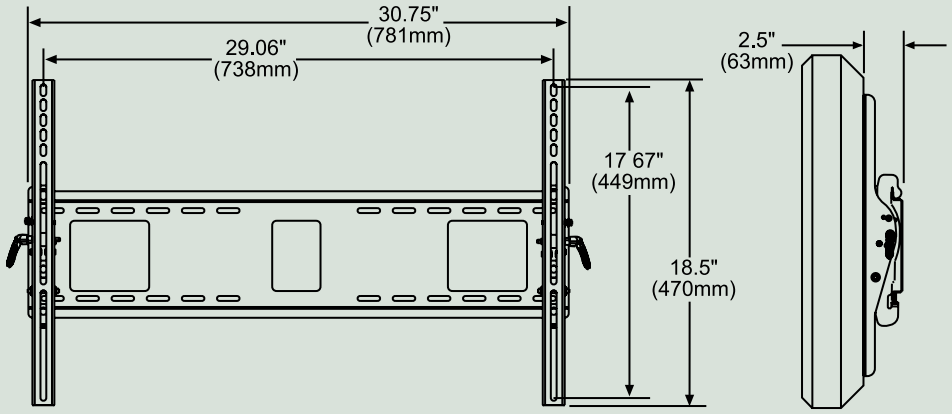

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Universal Fixed Tilt Wall Mount

For 37" to 60" LCD and Plasma Screens

- Single rail design enables quick and simple installation
- Slim design holds screen only 2" from wall
- Safety tab ensures screen is securely attached to wall plate
- Integrated tilt feature with fixed angles of 0°, 2°, 5° and 10° for increased functionality and viewing flexibility
- Horizontal screen adjustment up to 8", for centering screen on wall
- Largest VESA® pattern accepted: 800 x 400 mm

0° configuration

10° configuration

* Includes standard hardware (hex or Phillips) for attaching screen to mount

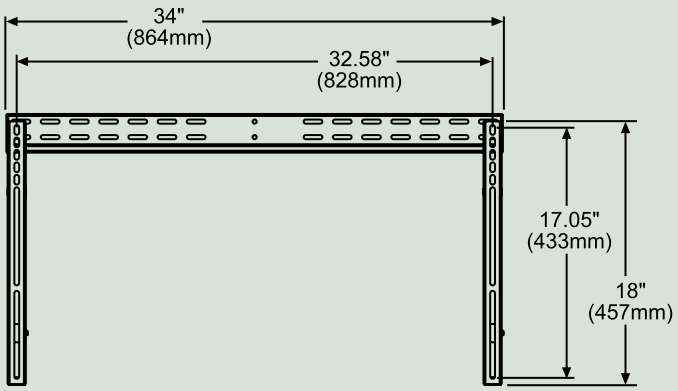

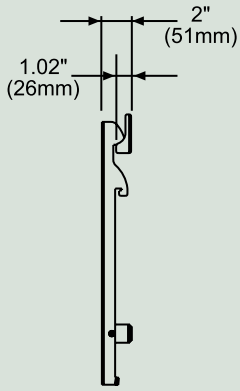

MODELS

Universal Models:
Standard Fasteners*

PFT660 High Gloss Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 32.58" horizontally and 17.05" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 34" x 18" x 2" (86.4 x 45.7 x 5.1 cm)
Fixed Tilt:	0°, 2°, 5° and 10°
Max Load:	175 lb (79.3 kg)
Ship Weight:	7 lb (3.17 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Flat Panel

SmartMount®

Universal Tilt Wall Mount

For 42" to 71" LCD and Plasma Screens

- Pre-tensioned universal tilt bracket allows for +15/-5° tilt adjustment in one easy motion
- Optional tilt lock in 5° increments
- Easy-grip ratcheting handle locks angle into place
- Horizontal screen adjustment up to 8"
- Universal brackets easily hook onto the wall plate for fast installation
- Fits screens with mounting patterns of 36.04" x 19.79"

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Security Fasteners*

ST670	Black
ST670-S	Silver

Standard Fasteners**

ST670P	Black
ST670P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 36.04" horizontally and 19.79" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 37.75" x 20.62" x 3" (95.9 x 52.4 x 7.6 cm)
Tilt:	+15/-5°
Max Load:	250 lb (113.4 kg)
Ship Weight:	15.4 lb (6.98 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC615: Metal Stud Installation Kit 142

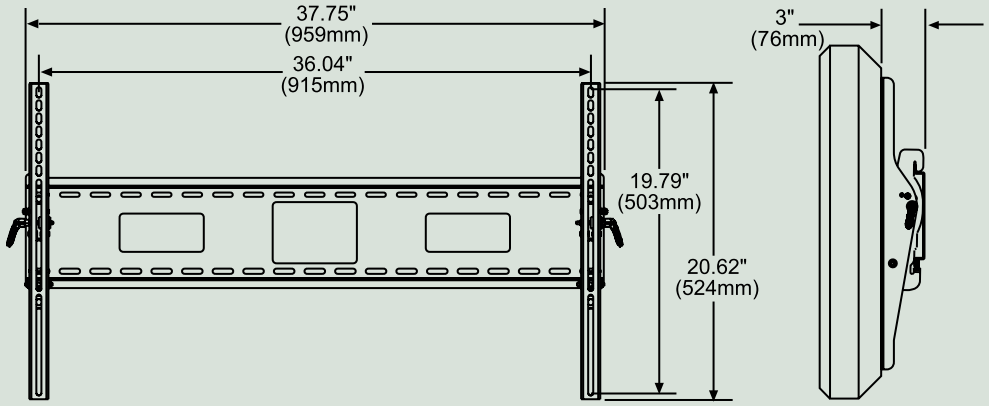

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Universal Tilt Wall Mount

For 61" to 102" LCD and Plasma Screens

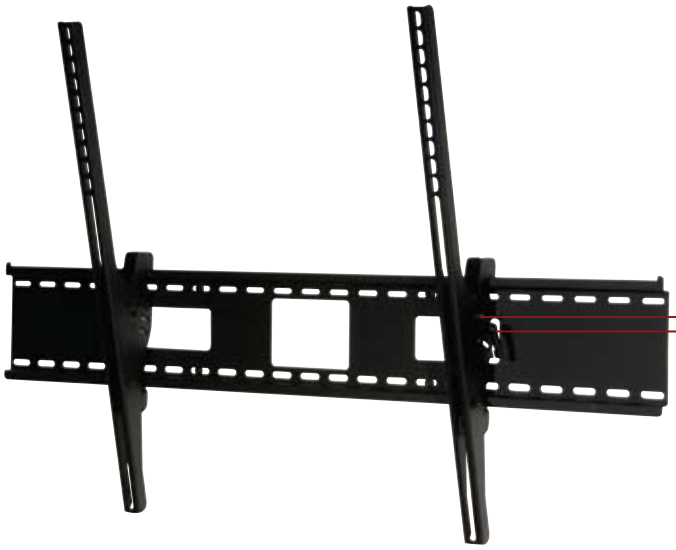

- Pre-tensioned universal tilt bracket allows for +15/-5° tilt adjustment in one easy motion
- Optional tilt lock in 5° increments
- Easy-grip ratcheting handle locks angle into place
- Horizontal screen adjustment up to 8"

- Universal brackets easily hook onto the wall plate for fast installation
- Fits screens with mounting hole patterns up to 44.04"W and 29.31"H

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount

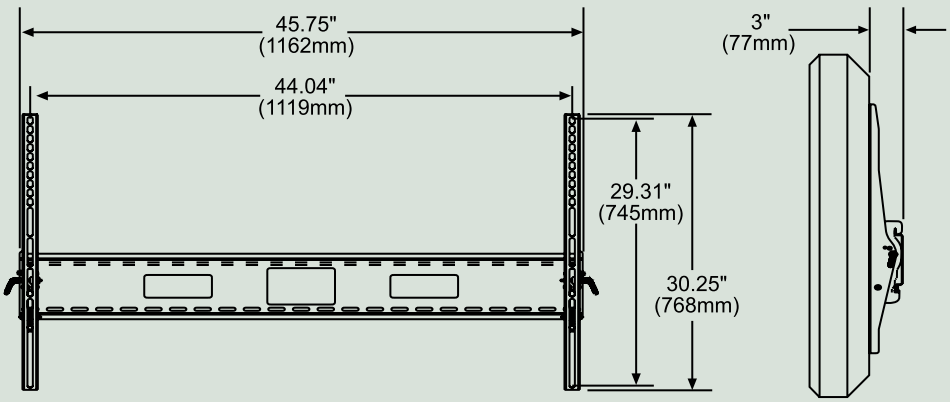

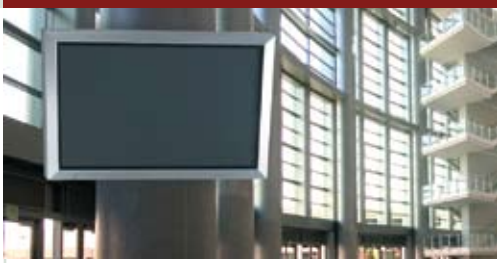

MODELS

Universal Models:
Security Fasteners*

ST680	Black
ST680-S	Silver

Standard Fasteners**

ST680P	Black
ST680P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 44.04" horizontally and 29.31" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 45.75" x 30.25" x 3" (116.2 x 76.8 x 7.7 cm)
Tilt:	+15/-5°
Max Load:	350 lb (158.8 kg)
Ship Weight:	18.2 lb (8.25 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC615: Metal Stud Installation Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

MODELS

Universal Models:
Standard and Security Fasteners*

ONE-TP	Black
ONE-TP-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 40.8" horizontally and 26.5" vertically

SPECIFICATIONS

Dimensions: (W x H x D)
19.3"-43" x 13.8"-27.3" x 3.2"-3.3"
(48.9-109.2 x 35.1-69.3 x 8.1-8.4 cm)

Tilt: +15/-5°

Max Load: 250 lb (113.3 kg)

Ship Weight: 18.7 lb (8.5 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC415: (for one or two plate configurations)
4-pack Metal Stud Fastener Kit 142
ACC615: (for 3-plate configurations)
6-pack Metal Stud Installation Kit.....142

ONEMount®

Modular Wall Mount

For 23" to 84" LCD and Plasma Screens

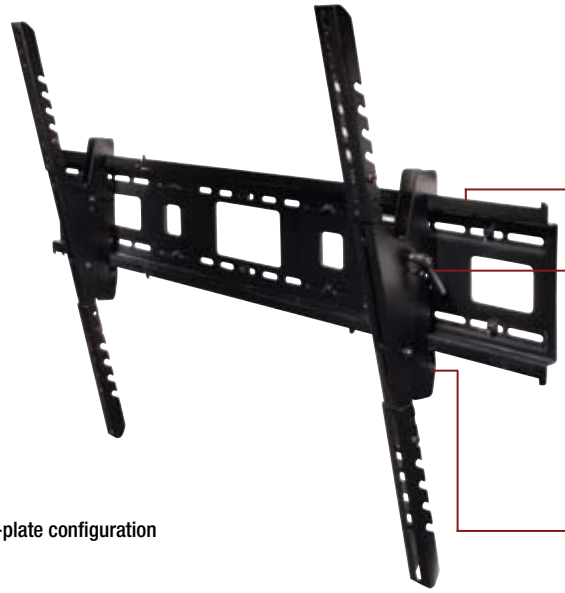

3-plate configuration

2-plate configuration

1-plate configuration

- Modular design expands mount to accommodate 23" to 84" screens
- Horizontal screen adjustment up to 8"
- One-touch tilt allows adjustment of +15/-5° without use of tools
- Optional tilt lock in 5° increments
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Fits screens with mounting hole patterns up to 40.8"W and 26.5"H
- Portrait orientation for up to 50" screens with maximum mounting hole patterns of 26.5"W and 17"H

* Includes theft resistant and standard hardware (hex or Phillips) for securing screen to mount

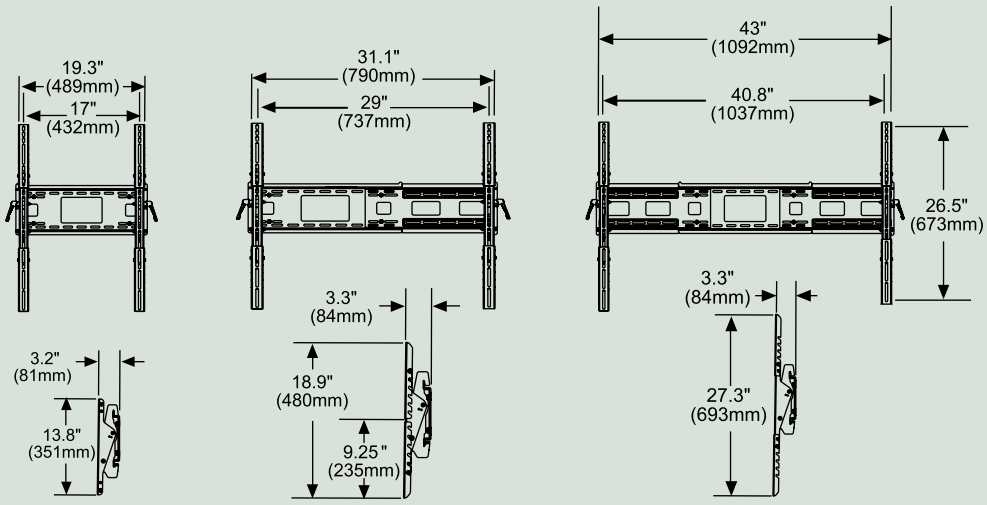

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Screen-specific Tilt Wall Mount

For up to 71" LCD and Plasma Screens

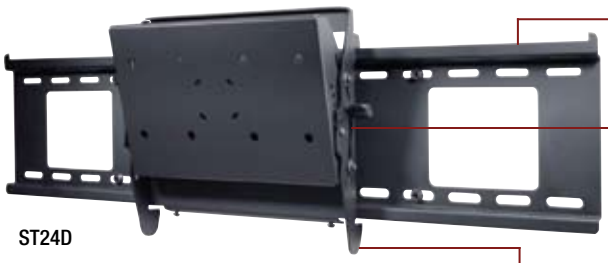

ST24D

ST16D

- One-touch tilt allows adjustment of +15/-5° without use of tools
- Horizontal screen adjustment up to 8"
- Optional tilt lock in 5° increments
- Easy-glide bracket design ensures screen is securely attached to wall plate
- Choose from 16" only or 16"–24" stud center wall plate
- Fits any screen-specific PLP or LC adapter plate
- Model ST16D ships with 19.25" wide wall plate, perfect for portrait style installations

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

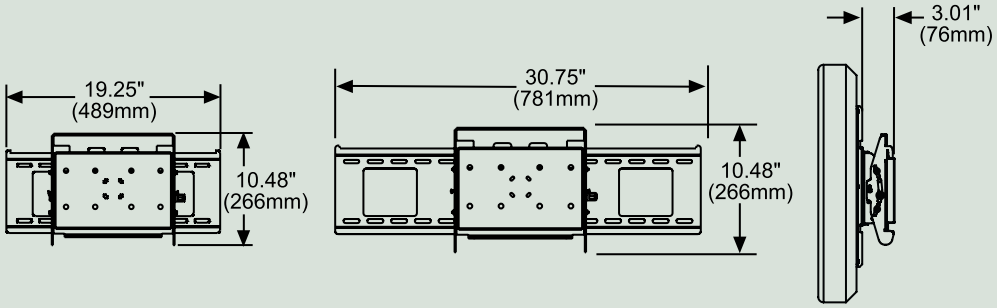

MODELS

Dedicated Models:
Security Fasteners*
Screen Adapter Purchased Separately**

ST16D	for up to 16" studs	Black
ST24D	for up to 24" studs	Black

SCREEN ADAPTER

Dedicated Models:
Requires screen-specific PLP or LC adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
ST16D	19.25" x 10.48" x 3.01" (48.9 x 26.6 x 7.6 cm)
ST24D	30.75" x 10.48" x 3.01" (78.1 x 26.6 x 7.6 cm)
Tilt:	+15/-5°
Max Load:	200 lb (90.7 kg)
Ship Weight:	
ST16D	10.1 lb (4.6 kg)
ST24D	12.2 lb (5.5 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

c UL us

ACCESSORIES pg#

ACC415: 4-pack Metal Stud Fastener Kit 142

Flat Panel

SmartMount®

Pivot Wall Mount

For 10" to 22" LCD Screens

- Arm extends up to 6.86" from wall
- Two tensionable pivot points
- Pre-tensioned tilt mechanism offers up to ±35° of one-touch tilt
- ±5° of roll to level screen horizontally
- Up to ±90° of side-to-side swivel
- VESA® 75 and 100 compliant
- Non-VESA® adapter plates also available

MODELS

Universal Models:
Standard Fasteners*

SP730P	Black
SP730P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 4.6"-7.9" x 5.5" x 1.9"-6.86" (11.6-20.1 x 13.9 x 4.8-17.4 cm)
Tilt:	±35°
Swivel:	±90°
Roll:	±5°
Max Load:	25 lb (11.34 kg)
Ship Weight:	2.2 lb (1 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC908: Metal Stud Wall Kit 142
ACC918: Security Fasteners.....145

* Includes standard hardware (hex or Phillips) for attaching screen to mount



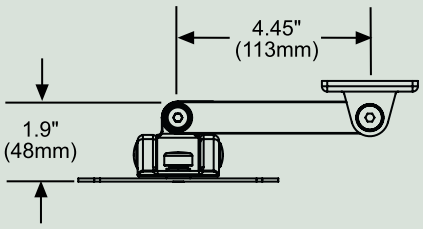

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Pivot Wall Mount

For 10" to 22" LCD Screens

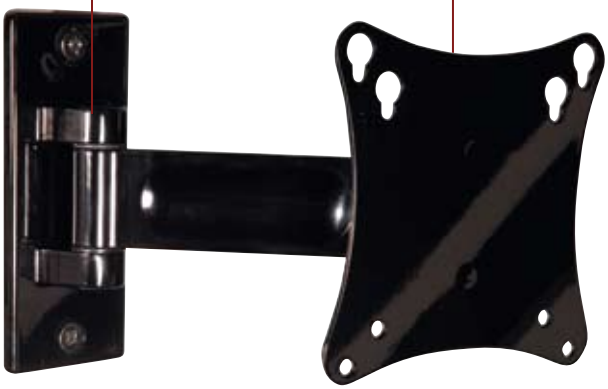

- Arm extends up to 7.01" from wall
- Two tensionable pivot points for up to 180° of side-to-side swivel
- Pre-tensioned tilt mechanism offers up to ±35° of tilt
- ±5° of roll to level screen horizontally
- Integrated cable management keeps cables and cords out of the way
- VESA® 75 and 100 compliant

* Includes standard hardware (hex or Phillips) for attaching screen to mount



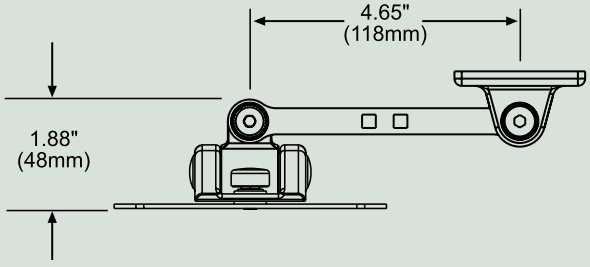

MODELS

Universal Models:
Standard Fasteners*

PP730	High gloss black
PP730-S	High gloss silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
4.6"-8.18" x 5.5" x 1.88"-7.01"
(11.6-20.7 x 13.9 x 4.7-17.7 cm)

Tilt: ±35°
Swivel: ±90°
Roll: ±5°

Max Load: 25 lb (11.34 kg)

Ship Weight: 2.2 lb (1 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC908: Metal Stud Wall Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®
Pivot Wall Mount

For 22" to 40" LCD Screens

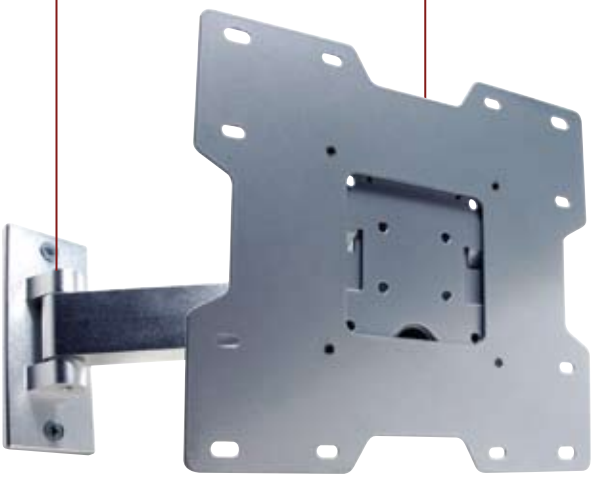

- Arm extends up to 10.05" from wall
- Two tensionable pivot points for up to 180° of side-to-side swivel
- One-touch tilt allows adjustment of +15/-5° without the use of tools
- ±5° of roll to level screen horizontally
- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Non-VESA® adapter plates also available

MODELS

Universal Models:
Standard Fasteners*

SP740P	Black
SP740P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
8.75"-12.24" x 9.3" x 2.97"-10.05"
(22.21-31 x 23.7 x 7.5-25.5 cm)

Tilt: +15/-5°
Swivel: ±90°
Roll: ±5°

Max Load: 80 lb (36.2 kg)

Ship Weight: 5.5 lb (2.49 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

WSP490: Metal Stud Wall Plate.....142
ACC919: Security Fasteners.....145

* Includes standard hardware (hex or Phillips) for attaching screen to mount



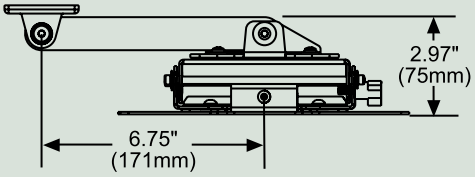

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Pivot Wall Mount

For 22" to 40" LCD Screens

- Arm extends up to 8.13" from wall
- Two tensionable pivot points for up to 180° of side-to-side swivel
- One-touch tilt allows adjustment of +15/-5° without the use of tools
- ±7° of roll to level screen horizontally
- Integrated cable management keep wires out of the way
- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant

* Includes standard hardware (hex or Phillips) for attaching screen to mount

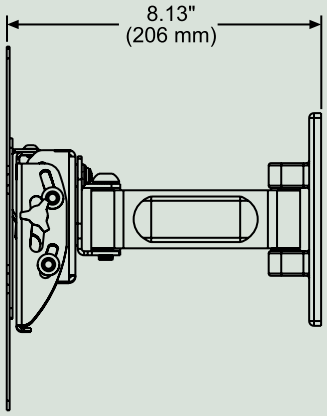

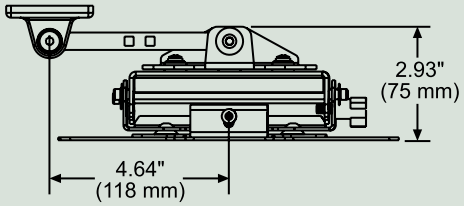

MODELS

Universal Models:
Standard Fasteners*

PP740	High gloss black
PP740-S	High gloss silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
8.75"-10.25" x 9.3" x 2.93"-8.13"
(22.22-26 x 23.6 x 7.5-20.6 cm)

Tilt: +15/-5°
Swivel: ±90°
Roll: ±7°

Max Load: 80 lb (36.2 kg)

Ship Weight: 3.84 lb (1.74 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

WSP490: Metal Stud Wall Plate.....142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Flat Panel

SmartMount®

Pull-Out Swivel Wall Mount

For 26" to 58" LCD and Plasma Screens

MODELS

Universal Models: (32" to 58" screens)
Security Fasteners*

SP850-UNL	Black
SP850-UNL-S	Silver

Standard Fasteners**

SP850-UNLP	Black
SP850-UNLP-S	Silver
SP850-UNLP-GB	High gloss black
SP850-UNLP-GS	High gloss silver

Dedicated Models: (26" to 58" screens)
Screen Adapter Purchased Separately for Non-VESA® Screens***
Security Fasteners*

SP850	Black
SP850-S	Silver

Standard Fasteners**

SP850P	Black
SP850P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17" vertically

Dedicated Models:
Includes screen adapter plate to accommodate VESA® 100 and 200 x 100 mm mounting holes. Non-VESA® compatible screens require screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	30.75" x 18" x 3.4"–11.9" (78.1 x 45.7 x 8.6–30.2 cm)
Dedicated Models:	21" x 9.76" x 2.25"–10.75" (53.3 x 24.8 x 5.7–27.1 cm)
Tilt:	0°, 5° or 10°
Swivel:	±45°
Roll:	±1°
Max Load:	150 lb (68.2 kg)
Ship Weight:	
Universal Models:	39 lb (17.6 kg)
Dedicated Models:	22.7 lb (10.24 kg)
Mounting Surfaces:	Wood stud, concrete and cinder block

Quickship Item®

Universal Models



Dedicated Models

- Arms extend up to 10.75" from wall (plus thickness of adapter plate)
- Pull-out swivel with up to 90° rotation
- Available high gloss black and high gloss silver to match today's flat panel TV finishes
- 0°, 5° or 10° lockable tilt
- Built-in cable management
- ±1° roll for horizontal screen alignment during installation
- Locking tab included for optional swivel restriction to one side
- Dedicated models include VESA® 100 and 200 x 100 mm compliant adapter plate
- Lock Key™ installation tool secures arms for screen installation

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount
*** Dedicated adapter plates come in flat black and include security fasteners

Requires non-VESA® screen-specific adapter to be purchased separately







To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Pivot Wall Mount

For 32" to 71" LCD and Plasma Screens

- 15° pivot from left to right
- Offers 10° of forward tilt and 5° of backward tilt
- Mount enables leveling adjustment of flat panel to sit level at any angle; no tools required
- Screen mounts in landscape or portrait orientation
- PS-1 arm extends 8.75"
- PS-2 arm extends 10.13"

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately



PS-1



PS-2

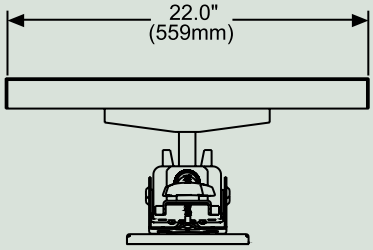

MODELS

Dedicated Models:
Security Fasteners*
Screen Adapter Purchased Separately**

PS-1	for 32" to 50" screens	Black
PS-2	for 42" to 71" screens	Black

SCREEN ADAPTER

Dedicated Models:
Requires screen-specific PLP adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
PS-1:	22" x 12.08 x 8.75" (55.9 x 30.6 x 22.2 cm)
PS-2:	22" x 12.04" x 10.13" (55.9 x 30.5 x 25.7 cm)
Tilt:	+10/-5°
Swivel:	±15°
Max Load:	
PS-1:	150 lb (68.2 kg)
PS-2:	225 lb (102.3 kg)
Ship Weight:	
PS-1:	24 lb (11 kg)
PS-2:	26.5 lb (12 kg)
Mounting Surfaces:	Wood stud, concrete and cinder block

c UL us

Flat Panel

SmartMount®
Articulating Wall Arm

For 10" to 22" LCD Screens

- Arm extends up to 15.86" from wall
- Three tensionable pivot points for versatile screen positioning
- Pre-tensioned tilt mechanism offers up to ±35° of one-touch tilt
- ±5° of roll to level screen horizontally
- Built-in internal cable management channels keep cables and cords out of the way
- VESA® 75 and 100 compliant
- Non-VESA® adapter plates also available

MODELS

Universal Models:
Standard Fasteners*

SA730P	Black
SA730P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
4.6"-10.5" x 5.5" x 1.9"-15.86"
(11.9-26.7 x 14 x 4.8-40.3 cm)

Tilt: ±35°
Swivel: ±90°
Roll: ±5°

Max Load: 25 lb (11.34 kg)

Ship Weight: 3.6 lb (1.6 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC908: Metal Stud Wall Kit 142
ACC918: Security Fasteners 145

* Includes standard hardware (hex or Phillips) for attaching screen to mount

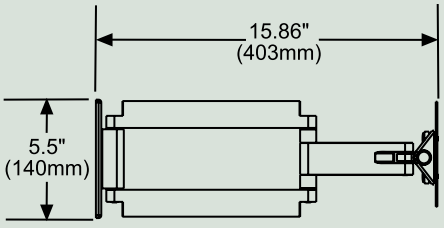

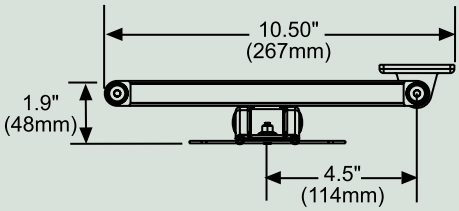

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Articulating Wall Arm

For 10" to 22" LCD Screens

- Arm extends up to 14.46" from wall
- Three adjustable pivot points for versatile screen positioning
- Pre-tensioned tilt mechanism offers up to ±35° of one-touch tilt
- ±5° of roll to level screen horizontally
- Integrated cable management keeps cables and cords out of the way
- VESA® 75 and 100 compliant

* Includes standard hardware (hex or Phillips) for attaching screen to mount

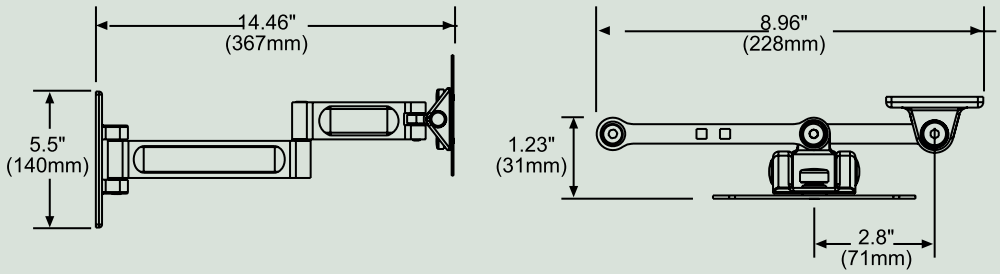

MODELS

Universal Models:
Standard Fasteners*

PA730	High gloss black
PA730-S	High gloss silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 4.7"-8.96" x 5.5" x 1.23"-14.46" (11.9-22.8 x 14 x 3.1-36.7 cm)
Tilt:	±35°
Swivel:	±90°
Roll:	±5°
Max Load:	25 lb (11.34 kg)
Ship Weight:	2.82 lb (1.3 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC908: Metal Stud Wall Kit 142

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Flat Panel

MODELS

Universal Models:
Standard Fasteners*
LCS-KLA Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
4.7"-8.96" x 6.1" x 2"-14.59"
(11.9-22.8 x 15.6 x 5.1-37.1 cm)

Tilt: ±35°
Swivel: ±90°
Roll: ±5°

Max Load: 25 lb (11.3 kg)

Ship Weight: 2.6 lb (1.2 kg)

Mounting Surfaces: Wood stud, concrete, and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC908: Metal Stud Wall Kit 142

Articulating Wall Arm

For 10" to 22" LCD Screens

- Arm extends up to 14.59" from wall
- Three adjustable pivot points for versatile screen positioning
- Up to ±35° of one-touch tilt
- ±5° of roll to level screen horizontally
- Integrated cable management keeps cables and cords out of the way
- VESA® 75 and 100 compliant
- Non-VESA® adapter plates also available

* Includes standard hardware (hex or Phillips) for attaching screen to mount

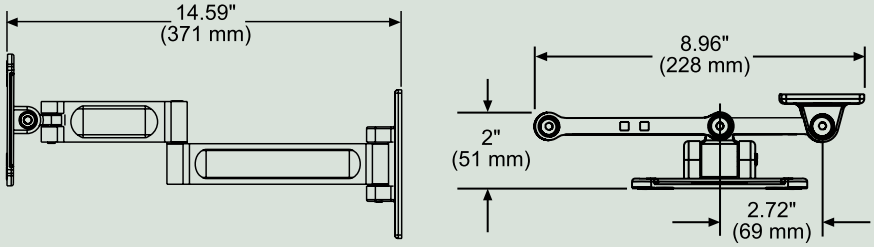

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Extended Reach Articulating Wall Arm

For 10" to 22" LCD Screens

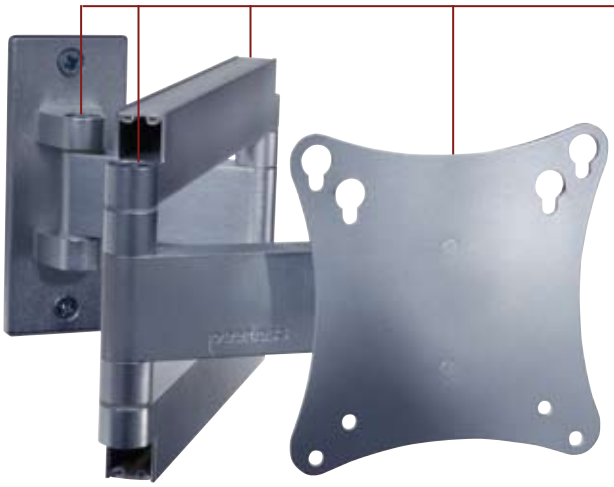

- Arm extends up to 19.11" from wall
- Four tensionable pivot points allow extensive screen mobility, even around corners
- Pre-tensioned tilt mechanism offers up to ±35° of one-touch tilt
- ±5° of roll to level screen horizontally
- Built-in internal cable management channels keep cables and cords out of the way
- VESA® 75 and 100 compliant
- Non-VESA® adapter plates also available

* Includes standard hardware (hex or Phillips) for attaching screen to mount

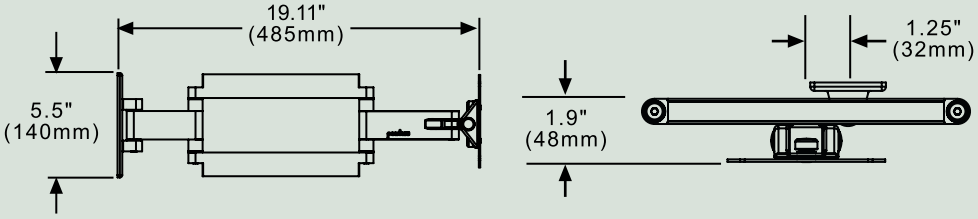

MODELS

Universal Models:
Standard Fasteners*

SAL730P	Black
SAL730P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
4.6"-9.75" x 5.5" x 1.9"-19.11"
(11.91-24.7 x 14 x 4.8-48.5 cm)

Tilt: ±35°
Swivel: ±90°
Roll: ±5°

Max Load: 25 lb (11.34 kg)

Ship Weight: 3.9 lb (1.7 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

ACC908: Metal Stud Wall Kit 142
ACC918: Security Fasteners 145

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®
Articulating Wall Arm

For 22" to 40" LCD Screens

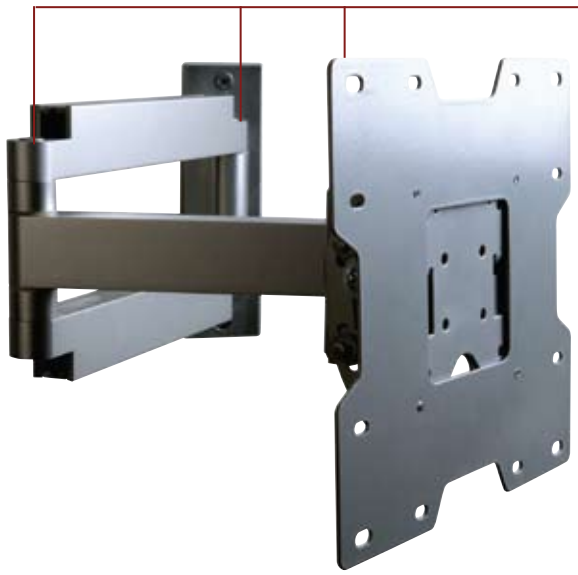

- Arm extends up to 20.19" from wall
- Three tensionable pivot points for versatile screen positioning
- One-touch tilt allows adjustment of +15/-5° without the use of tools
- ±7° of roll to level screen horizontally
- Built-in internal cord management channels keep cables and cords out of the way
- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Non-VESA® adapter plates also available

MODELS

Universal Models:
Standard Fasteners*

SA740P	Black
SA740P-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
8.75"-11.63" x 9.35" x 2.72"-20.19"
(22.2-29.5 x 23.7 x 6.9-51.3 cm)

Tilt: +15°/-5°
Swivel: ±90°
Roll: ±7°

Max Load: 80 lb (36.2 kg)

Ship Weight: 8.4 lb (3.8 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

Quickship Item®

ACCESSORIES pg#

WSP models: Metal Stud Wall Plate 141
ACC919: Security Fasteners 145

* Includes standard hardware (hex or Phillips) for attaching screen to mount

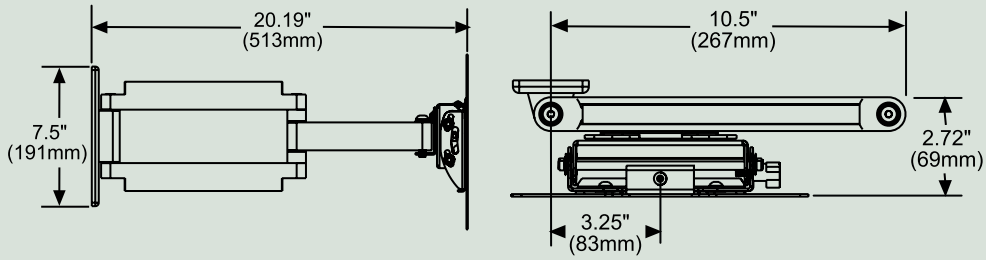

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Articulating Wall Arm

For 22" to 40" LCD Screens

- Arm extends up to 15.6" from wall
- Three tensionable pivot points for versatile screen positioning
- One-touch tilt allows adjustment of +15/-5° without the use of tools
- ±7° of roll to level screen horizontally
- Integrated cable management keep cables and cords out of the way
- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant

* Includes standard hardware (hex or Phillips) for attaching screen to mount

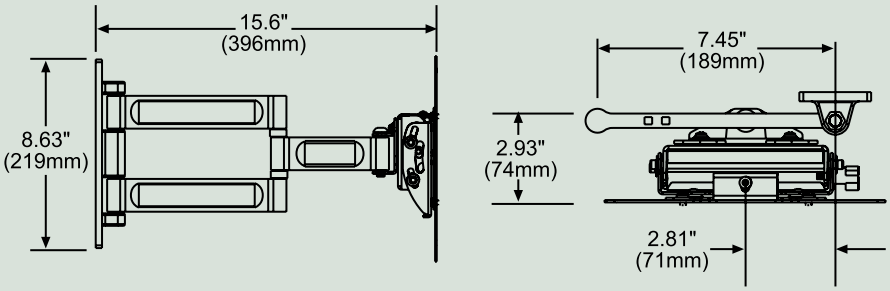

MODELS

Universal Models:
Standard Fasteners*

PA740	High gloss black
PA740-S	High gloss silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 8.75" x 9.35" x 2.93"-15.6" (22.2 x 23.7 x 7.4-39.6 cm)
Tilt:	+15/-5°
Swivel:	±90°
Roll:	±7°
Max Load:	80 lb (36.2 kg)
Ship Weight:	5.89 lb (2.67 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

WSP models: Metal Stud Wall Plate 141

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

Flat Panel

SmartMount®
Articulating Wall Arm

For 32" to 45" LCD and Plasma Screens

- Arm extends up to 27.8" from wall (plus thickness of screen adapter)
- Universal models accommodate screens with mounting holes up to 30.13" W x 17.24" H
- U-groove channel and caps provide 1" clearance per channel for clean and simple cable management
- Three screw wall attachment for a fast installation
- One-touch tilt allows adjustment of +15/-5° without the use of tools
- Built-in cable ties control cables and cords with movement of arm
- ±2.5° roll to level screen horizontally
- Allows portrait or landscape screen orientation without removing the screen

Universal Models

Dedicated Models

* Includes standard hardware (hex or Phillips) for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

⚠ Requires non-VESA screen-specific adapter to be purchased separately

MODELS

Universal Models
Standard Fasteners*

SA745PU	High gloss black
SA745PU-S	High gloss silver

Dedicated Models:
Screen Adapter Purchased Separately for Non-VESA® Screens**

Standard Fasteners*

SA745P	High gloss black
SA745P-S	High gloss silver ⚠

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 30.13" horizontally and 17.24" vertically

Dedicated Models:
Includes screen adapter to accommodate VESA® 100, 200 x 100 and 200 x 200 mm mounting holes. Non-VESA® compatible screens require screen-specific adapter to be purchased separately.

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	32.87" x 18.25" x 6.8"–29.8" (83.48 x 46.35 x 17.27–75.69 cm)
Dedicated Models:	17" x 14.5" x 4.8"–27.8" (43.18 x 36.83 x 12.19–70.6 cm)
Tilt:	+15/-5°
Swivel:	±90°
Roll:	±2.5°
Max Load:	90 lb (40.8 kg)
Ship Weight:	
Universal Models:	33.38 lb (15.1 kg)
Dedicated Models:	26 lb (11.79 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC615: Metal Stud Togglers.....142
ACC925: Security Fasteners.....145

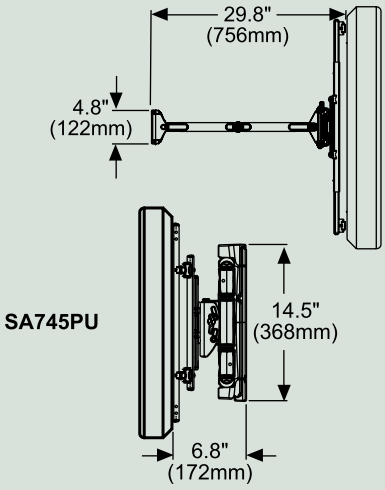

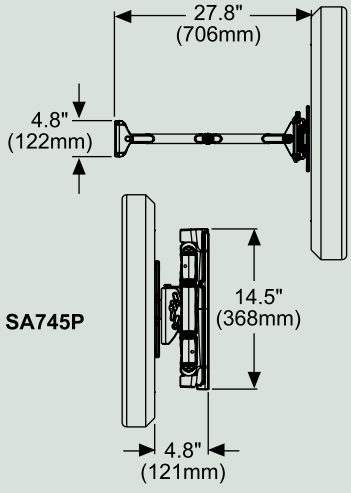

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

SmartMount®

Articulating Wall Arm

For 32" to 50" LCD and Plasma Screens

Universal Models

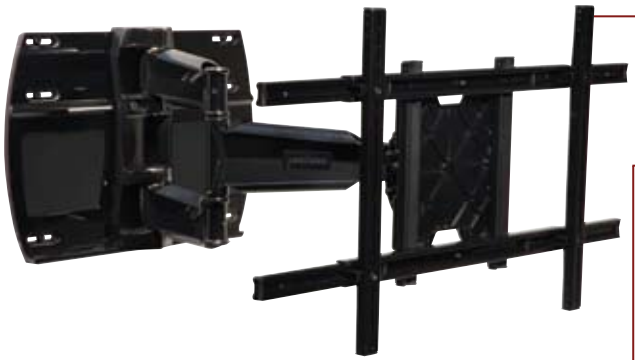

Dedicated Models

- Arm extends up to 27.8" from wall (plus thickness of screen adapter)
- Universal models accommodate screens with mounting holes up to 30.13" W x 17.24" H
- U-groove channel and caps provide 1" clearance per channel for clean and simple cable management
- Up to 10.75" total horizontal adjustment
- One-touch tilt allows adjustment of +15/-5° without the use of tools
- Built-in cable ties control cables and cords with movement of arm
- Two knockouts in wall plate for optimal electrical access
- ±2.5° roll to level screen horizontally
- Allows portrait or landscape screen orientation without removing the screen

* Includes standard hardware (hex or Phillips) for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

⚠ Requires non-VESA screen-specific adapter to be purchased separately

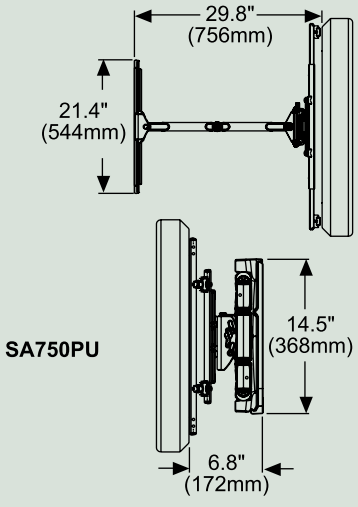

SA750PU

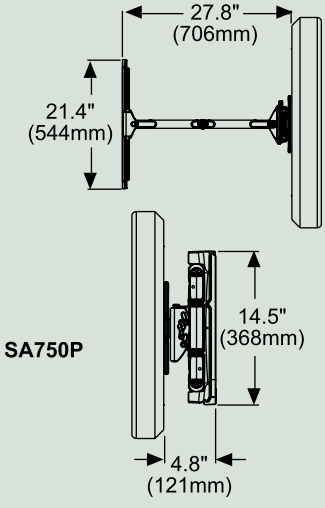

SA750P

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

MODELS

Universal Models
Standard Fasteners*

SA750PU	High gloss black
SA750PU-S	High gloss silver

Dedicated Models:
Screen Adapter Purchased Separately for Non-VESA® Screens**

Standard Fasteners*

SA750P	High gloss black
SA750P-S	High gloss silver ⚠

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 30.13" horizontally and 17.24" vertically

Dedicated Models:
Includes screen adapter to accommodate VESA® 100, 200 x 100 and 200 x 200 mm mounting holes. Non-VESA® compatible screens require screen-specific adapter to be purchased separately.

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	32.87" x 18.25" x 6.8"–29.8" (83.48 x 46.35 x 17.27–75.69 cm)
Dedicated Models:	22.75" x 14.5" x 4.8"–27.8" (57.78 x 36.83 x 12.19–70.6 cm)
Tilt:	+15/-5°
Swivel:	±90°
Roll:	±2.5°
Max Load:	150 lb (68.03 kg)
Ship Weight:	
Universal Models:	40.1 lb (18.1 kg)
Dedicated Models:	32.8 lb (14.8 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(Metal stud accessory required)*

Quickship Item®

ACCESSORIES pg#

ACC615: Metal Stud Togglers (supports up to 110 lb screens) 142
ACC925: Security Fasteners 145

Flat Panel

SmartMount®
Articulating Wall Arm

For 37" to 71" LCD and Plasma Screens

- Arm extends up to 27.8" from wall (plus thickness of screen adapter)
- Universal models accommodate 37" to 63" screens with mounting holes up to 30.13" W x 17.24" H
- 1" clearance per channel for clean and simple cable management
- Dual-arm construction for extra strength and smooth motion
- Up to 7.75" total horizontal adjustment
- One-touch tilt allows adjustment of +15/-5° without the use of tools
- Built-in cable ties control cables and cords with movement of arm
- Two knockouts in wall plate for optimal electrical access
- ±2.5° roll to level screen horizontally
- Allows portrait or landscape screen orientation without removing the screen

Universal Models

Dedicated Models



* Includes standard hardware (hex or Phillips) for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

⚠ Requires non-VESA screen-specific adapter to be purchased separately

MODELS

Universal Models (37" to 63" Screens)
Standard Fasteners*

SA760PU	High gloss black
SA760PU-S	High gloss silver

Dedicated Models: (37" to 71" Screens)
Screen Adapter Purchased Separately for Non-VESA® Screens**

Standard Fasteners*

SA760P	High gloss black
SA760P-S	High gloss silver ⚠

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 30.13" horizontally and 17.24" vertically

Dedicated Models:
Includes screen adapter to accommodate VESA® 100, 200 x 100 and 200 x 200 mm mounting holes. Non-VESA® compatible screens require screen-specific adapter to be purchased separately.

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	32.87" x 18.25" x 6.8"–29.8" (83.48 x 46.35 x 17.2–75.6 cm)
Dedicated Models:	28" x 14.5" x 4.8"–27.8" (71.12 x 36.83 x 12.19–70.6 cm)
Tilt:	+15/-5°
Swivel:	±90°
Roll:	±2.5°
Max Load:	200 lb (90.71 kg)
Ship Weight:	
Universal Models:	53.37 lb (24.2 kg)
Dedicated Models:	45 lb (20.4 kg)
Mounting Surfaces:	Wood stud, concrete, cinder block and metal stud *(For metal stud applications, contact Customer Care)*

Quickship Item®

ACCESSORIES pg#

ACC615: Metal Stud Togglers.....142 (supports up to 125 lb screens)
ACC925: Security Fasteners.....145

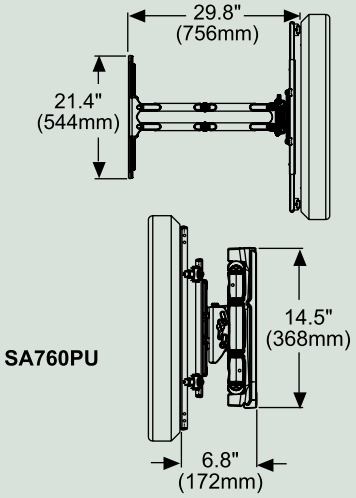

SA760PU

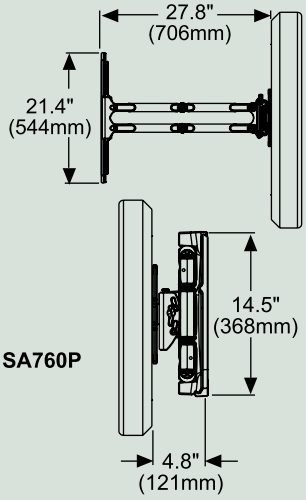

SA760P

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PLA Series
Articulating Wall Arm

For 32" to 50" LCD and Plasma Screens

Universal Models





Dedicated Models

- Arm extends up to 29.3" from wall (plus thickness of adapter plate)
- Three pivot points with up to 180° swivel
- +10/-5° of tilt
- ±7° roll to level screen horizontally
- Universal models adapt to screens with mounting holes up to 28.7" W x 17" H
- Includes mesh cord sheath and cable ties to neatly manage cables and cords
- Five horizontal arm positions at 2.6" centers for flexible lateral screen placement

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount
*** Dedicated adapter plates come in flat black and include security fasteners

⚠ Requires screen-specific adapter to be purchased separately



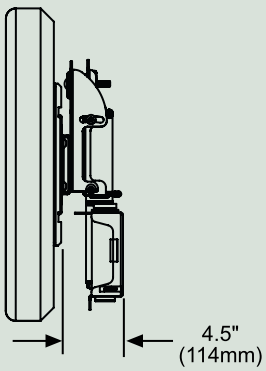

MODELS

Universal Models
Security Fasteners*

PLA50-UNL	Black
PLA50-UNL-S	Silver

Standard Fasteners**

PLA50-UNLP	Black
PLA50-UNLP-S	Silver
PLA50-UNLP-GB	High gloss black
PLA50-UNLP-GS	High gloss silver

Dedicated Models
Screen Adapter Purchased Separately***

PLA50	Black
PLA50-S	Silver

⚠

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17" vertically

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	30.7" x 19.1" x 5.6"–30.4" (78 x 48.6 x 14.2–77.2 cm)
Dedicated Models:	19.75" x 18.7" x 4.5"–29.3" (50.1 x 47.4 x 11.4–74.4 cm)
Tilt:	+10/-5°
Swivel:	±90°
Roll:	±7°
Max Load:	150 lb (68.2 kg)
Ship Weight:	
Universal Models:	43 lb (19.5 kg)
Dedicated Models:	28.5 lb (12.9 kg)
Mounting Surfaces:	Wood stud, concrete and metal stud *(Metal stud accessory required)*

ACCESSORIES pg#

WSP716: Metal Stud Wall Plate 142
(Triple stud on 16" centers)
WSP724: Metal Stud Wall Plate 142
(Triple stud on 24" centers)

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

PLA Series
Articulating Wall Arm

For 37" to 60" LCD and Plasma Screens

Universal Models

- Arm extends up to 31.2" from wall (plus thickness of adapter plate)
- Three pivot points with up to 180° swivel
- +10/-5° of tilt
- ±7° roll to level screen horizontally
- Universal models adapt to screens with mounting holes up to 28.7" W x 17" H

Dedicated Models



- Includes mesh cord sheath and cable ties to neatly manage cables and cords
- Five horizontal arm positions at 2.6" centers for flexible lateral screen placement

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount
*** Dedicated adapter plates come in flat black and include security fasteners

⚠ Requires screen-specific adapter to be purchased separately

MODELS

Universal Models
Security Fasteners*

PLA60-UNL	Black
PLA60-UNL-S	Silver

Standard Fasteners**

PLA60-UNLP	Black
PLA60-UNLP-S	Silver
PLA60-UNLP-GB	High gloss black
PLA60-UNLP-GS	High gloss silver

Dedicated Models
Screen Adapter Purchased Separately***

PLA60	Black
PLA60-S	Silver

⚠

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17" vertically

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	30.7" x 19.1" x 5.6"–32.3" (78 x 48.6 x 14.2–82 cm)
Dedicated Models:	19.75" x 19.12" x 4.5"–31.2" (50.2 x 48.6 x 11.4–79.2 cm)
Tilt:	+10/-5°
Swivel:	±90°
Roll:	±7°
Max Load:	175 lb (79.5 kg)
Ship Weight:	
Universal Models:	48.5 lb (21.9 kg)
Dedicated Models:	34.1 lb (15.4 kg)
Mounting Surfaces:	Wood stud, concrete and metal stud *(Metal stud accessory required)*

c UL us

ACCESSORIES pg#

WSP716: Metal Stud Wall Plate 142
(Triple stud on 16" centers)
WSP724: Metal Stud Wall Plate 142
(Triple stud on 24" centers)

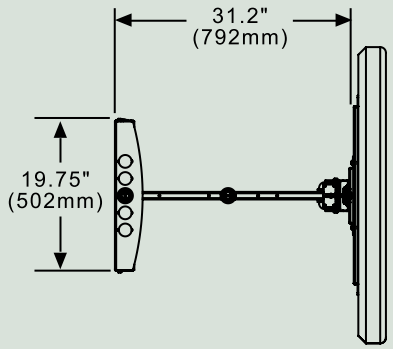

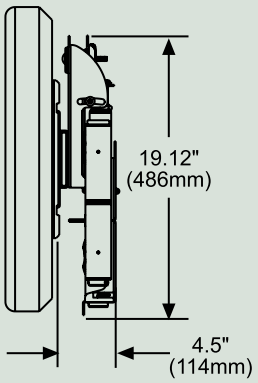

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PLA Series

Articulating Wall Arm with Vertical Adjustment

For 37" to 60" LCD and Plasma Screens

Universal Models

Dedicated Models



- Arm extends up to 31.2" from wall (plus thickness of adapter plate)
- Three pivot points with up to 180° swivel
- +10/-5° of tilt
- ±7° roll to level screen horizontally
- ±1" vertical adjustment located within reach behind screen
- Universal models adapt to screens with mounting holes up to 28.7" W x 17" H
- Includes mesh cord sheath and cable ties to neatly manage cables and cords
- 5 horizontal arm positions at 2.6" centers for flexible lateral screen placement

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount
*** Dedicated adapter plates come in flat black and include security fasteners

⚠ Requires screen-specific adapter to be purchased separately

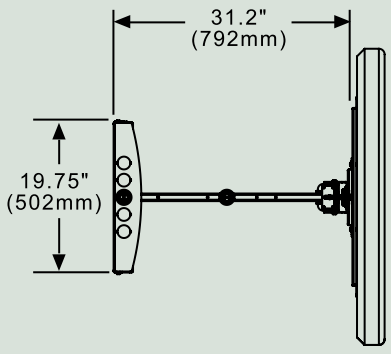

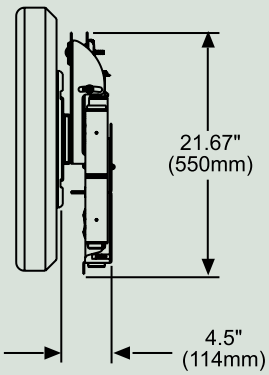

MODELS

Universal Models
Security Fasteners*

PLAV60-UNL	Black
PLAV60-UNL-S	Silver

Standard Fasteners**

PLAV60-UNLP	Black
PLAV60-UNLP-S	Silver
PLAV60-UNLP-GB	High gloss black
PLAV60-UNLP-GS	High gloss silver

Dedicated Models
Screen Adapter Purchased Separately***

PLAV60	Black
PLAV60-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17" vertically

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions: (W x H x D)
Universal Models: 30.7" x 21.67" x 5.6"–32.3" (78 x 55 x 14.2–82 cm)
Dedicated Models: 19.75" x 21.67" x 4.5"–31.2" (50.2 x 55 x 11.4–79.2 cm)

Tilt: +10/-5°
Swivel: ±90°
Roll: ±7°

Max Load: 175 lb (79.5 kg)

Ship Weight:
Universal Models: 50.6 lb (22.9 kg)
Dedicated Models: 36.2 lb (16.4 kg)

Mounting Surfaces: Wood stud, concrete and metal stud *(Metal stud accessory required)*

ACCESSORIES pg#

WSP716: Metal Stud Wall Plate 142
(Triple stud on 16" centers)
WSP724: Metal Stud Wall Plate 142
(Triple stud on 24" centers)

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

Flat Panel

PLA Series
Articulating Dual Wall Arm with Vertical Adjustment

For 42" to 71" LCD and Plasma Screens

MODELS

Universal Models (42" to 60" Screens)
Security Fasteners*

PLAV70-UNL	Black
PLAV70-UNL-S	Silver

Standard Fasteners**

PLAV70-UNLP	Black
PLAV70-UNLP-S	Silver
PLAV70-UNLP-GB	High gloss black
PLAV70-UNLP-GS	High gloss silver

Dedicated Models (42" to 71" Screens)
Screen Adapter Purchased Separately***

PLAV70	Black
PLAV70-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17" vertically

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	33.5" x 21.67" x 5.6"–30.4" (85 x 55.0 x 14.2–77.2 cm)
Dedicated Models:	19.75" x 21.67" x 4.5"–29.3" (50.2 x 55 x 11.4–74.4 cm)
Tilt:	+10/-5°
Swivel:	±90°
Roll:	±7°
Max Load:	200 lb (90.9 kg)
Ship Weight:	
Universal Models:	72.4 lb (32.9 kg)
Dedicated Models:	58.5 lb (26.5 kg)
Mounting Surfaces:	Wood stud, concrete and metal stud *(Metal stud accessory required)*

ACCESSORIES pg#

WSP716: Metal Stud Wall Plate 142
(Triple stud on 16" centers)
WSP724: Metal Stud Wall Plate 142
(Triple stud on 24" centers)

Universal Models

- Arms extend up to 29.3" from wall (plus thickness of adapter plate)
- Up to 180° swivel
- +10/-5° of tilt
- ±7° roll to level screen horizontally
- ±1" vertical adjustment located within reach behind screen

Dedicated Models

- Universal models accommodate 42" to 60" screens with mounting holes up to 28.7" W x 17" H
- Includes mesh cord sheath and cable ties to neatly manage cables and cords
- 3 horizontal arm positions at 2.6" centers for flexible lateral screen placement

* Includes theft resistant hardware for attaching screen to mount
** Includes standard hardware (hex or Phillips) for attaching screen to mount
*** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

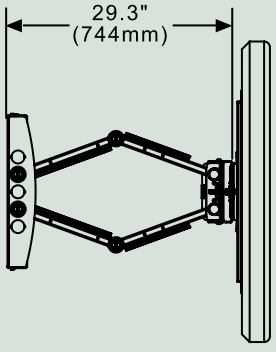

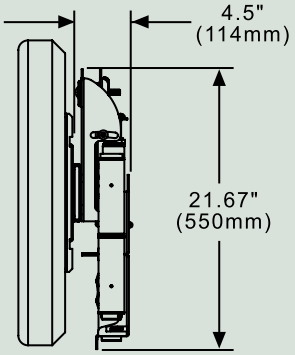

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

In-Wall Box

For up to 40" LCD Screens

- Compatible with small and medium pivoting and articulating arms
- Installs between 16" wood stud centers
- Stud-locating tabs adjust 1/4" left or right to accommodate stud spacing
- Removable outlet receptacle and cable management access plates make installation easy
- Three height adjustment points in box set screen in desired vertical position
- Can be inverted to position screen to the right or the left
- TV mount required

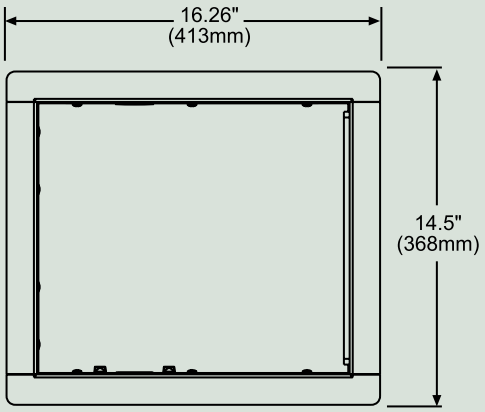

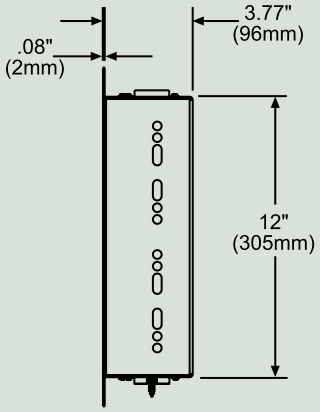

MODELS

Universal Models:
Standard Fasteners

IB40	High gloss black
IB40-S	High gloss silver
IB40-W	White

SPECIFICATIONS

Dimensions:	(W x H x D) 16.26" x 14.5" x 3.77" (41.3 x 36.8 x 9.6 cm)
Max Load:	80 lb (36.28 kg)
Ship Weight:	14.23 lb (6.45 kg)
Mounting Surfaces:	Wood stud

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

In-Wall Mount

For 22" to 40" LCD Screens

- Installs between 16" wood stud centers
- Stud-locating tabs adjust 1/4" left or right to accommodate stud spacing
- Includes SA740P articulating mount for up to 40" screens
- Removable outlet receptacle and cable management access plates make installation easy
- Three height adjustment points in box set screen in desired vertical position
- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Can be inverted to position screen to the right or the left

* Includes standard hardware (hex or Phillips) for attaching screen to mount

MODELS

Universal Models:
Standard Fasteners*

IM740P	High gloss black
IM740P-S	High gloss silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
16.25" x 14.5" x 3.85"-20.52"
(41.2 x 36.8 x 9.8-52.12 cm)

Tilt: +15°, -5°
Swivel: ±45°
Roll: ±5°

Max Load: 80 lb (36.2 kg)

Ship Weight: 22.63 lb (57.4 kg)

Mounting Surfaces: Wood

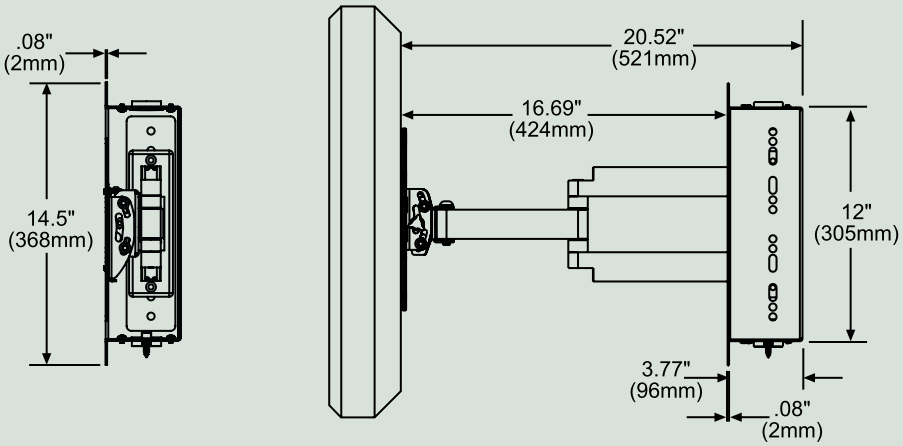

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

In-Wall Mount

For 32” to 71” LCD and Plasma Screens

- Installs between 16" wood stud centers
- Stud-locating tabs adjust 1/4" left or right to accommodate stud spacing
- Removable outlet receptacle and cable management access plates make installation easy
- Can be inverted to position screen to the right or left
- IM760P models are VESA® 100, 200 x 100 and 200 x 200 mm compliant

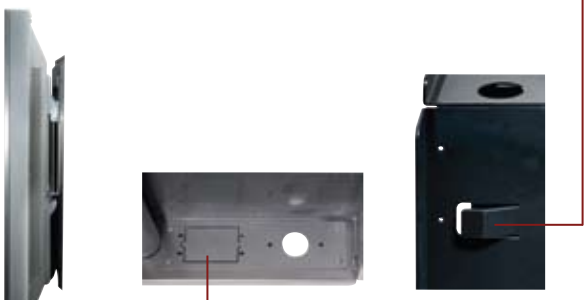

* Includes standard hardware (hex or Phillips) for attaching screen to mount

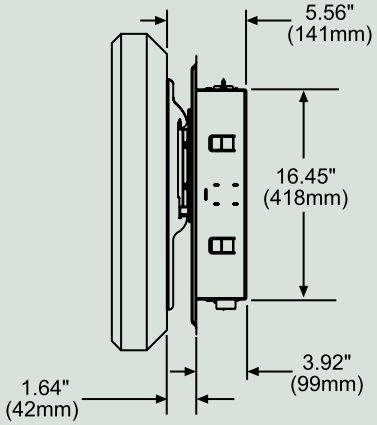

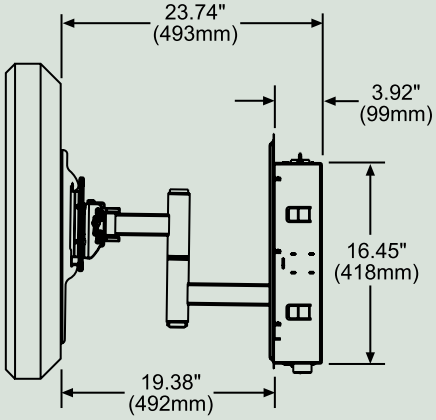

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

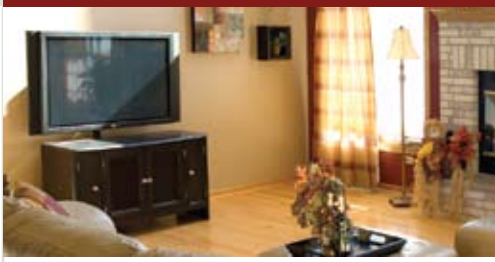

MODELS

Universal Models:
Standard Fasteners*

IM760PU	High gloss black
IM760PU-S	High gloss silver

Dedicated Models
Screen Adapter Purchased Separately**

IM760P	High gloss black
IM760P-S	High gloss silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17" vertically

Dedicated Models:
Includes screen adapter to accommodate VESA® 100, 200 x 100 and 200 x 200 mm mounting holes. Non-VESA® compatible screens require screen-specific adapter to be purchased separately.

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	30.75" x 21.86" x 5.56"-23.74" (78 x 55.5 x 14.1-49.3 cm)
Dedicated Models:	19.46" x 21.86" x 4.38"-22.56" (49.4 x 55.5 x 11.1-57.3 cm)
Tilt:	+10/-5°
Swivel:	±45°
Roll:	±7°
Max Load:	175 lb (79.5 kg)
Ship Weight:	
Universal Models:	42.6 lb (19.32 kg)
Dedicated Models:	58.49 lb (26.53 kg)
Mounting Surfaces:	Wood

Flat Panel

PARAMOUNT™ by Peerless

LCD Ceiling Mount

For 15" to 24" LCD Screens

MODELS

Universal Models with 9.7" - 13.9" extension:
Security Fasteners*

PC930A	Black
PC930A-S	Silver
PC930A-W	White

Universal Models with 13.78" - 21.89" extension:
Security Fasteners*

PC930B	Black
PC930B-S	Silver
PC930B-W	White

Universal Models with 20.24" - 34.02" extension:
Security Fasteners*

PC930C	Black
PC930C-S	Silver
PC930C-W	White

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
PC930A(-S)(-W): 6.5" x 9.8"-13.9" x 6.5" (16.5 x 24.8-35.3 x 16.5 cm)
PC930B(-S)(-W): 6.5" x 13.78"-21.89" x 6.5" (16.5 x 35-55.6 x 16.5 cm)
PC930C(-S)(-W): 6.5" x 20.24"-34.02" x 6.5" (16.5 x 51.4-86.4 x 16.5 cm)

Tilt: +15/-5°
Swivel: 360°

Max Load: 50 lb (22.67 kg)

Ship Weight:
PC930A(-S)(-W): 4.85 lb (2.17 kg)
PC930B(-S)(-W): 5.4 lb (2.4 kg)
PC930C(-S)(-W): 6.35 lb (2.88 kg)

Mounting Surfaces: Wood joist and concrete

Quickship Item®

- VESA® 75 and 100 compliant
- Three adjustable extension lengths:
  PC930A models - 9.8" - 13.9"
  PC930B models - 13.78" - 21.89"
  PC930C models - 20.24" - 34.02"
- Continuous tilt of +15/-5° with optional lock in 5° increments
- 360° swivel provides limitless screen placement opportunities
- Internal cable management within extension channels for clean, clutter-free appearance
- Safety catch designed into extension channels to ensure user and equipment safety

* Includes theft resistant hardware for attaching screen to mount

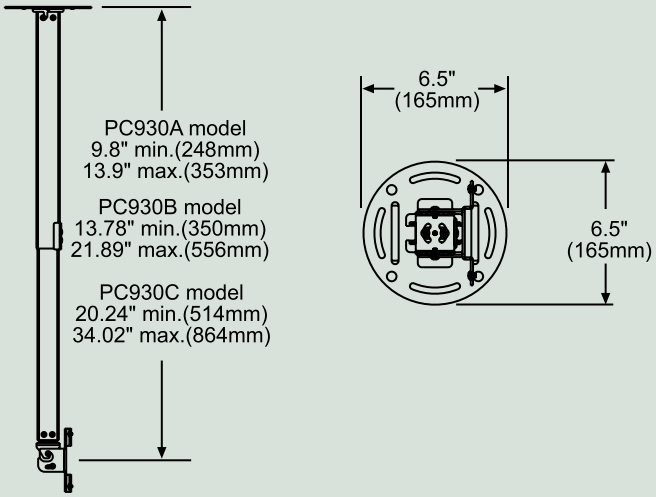

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

LCD Ceiling Mount

For 13" to 29" LCD Screens

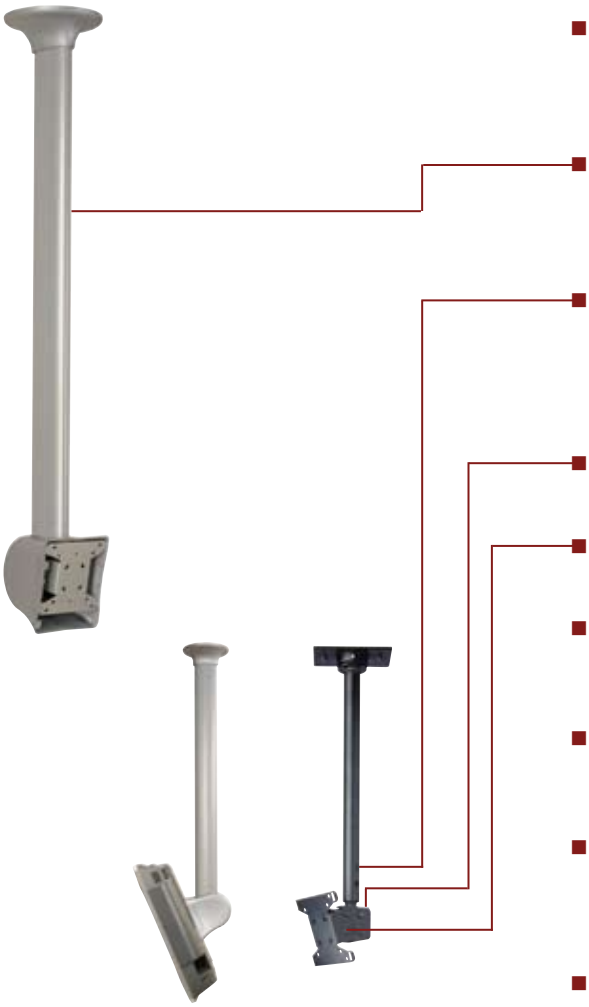

- VESA® 75 and 100 compliant
- Non-VESA® screen adapter plates also available
- Cable management cover models available for a clean look
- Adjustable height in 1" increments: 18" to 30" (LCC-18 models) or 36" to 48" (LCC-36 models)
- 360° swivel
- +20/-5° tilt
- 3/4" extension pipe for low-profile appearance
- Portrait or landscape orientation
- Mounts in standard or screen face-down position
- Includes adapter to 1-1/2" NPT pipe

* Includes theft resistant hardware for attaching screen to mount

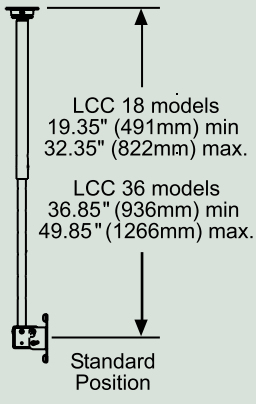

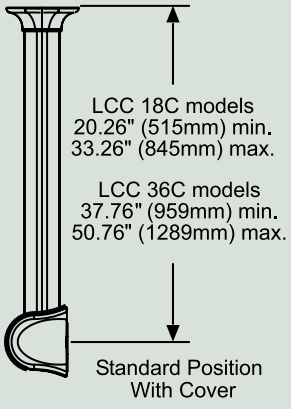

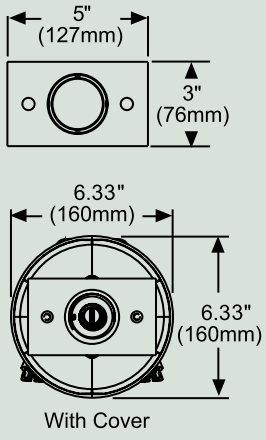

MODELS

Universal Models:
Security Fasteners*

LCC-18	Black
LCC-18S	Silver
LCC-36	Black
LCC-36S	Silver

Universal Models with Cable Management Covers:
Security Fasteners*

LCC-18-C	Black
LCC-18-CS	Silver
LCC-36-C	Black
LCC-36-CS	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D)
LCC-18(S):	5" x 19.35"-32.35" x 3" (12.7 x 49.1-82.1 x 7.6 cm)
LCC-18-C(S):	6.33" x 20.26"-33.26" x 6.33" (16.1 x 51.4-84.4 x 16.1 cm)
LCC-36(S):	5" x 36.85"-49.85" x 3" (12.7 x 93.5-126.6 x 7.6 cm)
LCC-36-C(S):	6.33" x 37.76"-50.76" x 6.33" (16.1 x 95.9-128.9 x 16.1 cm)
Tilt:	+20/-5°
Swivel:	360°
Max Load:	40 lb (18.1 kg)
Ship Weight:	
LCC-18(S):	4.6 lb (2.1 kg)
LCC-18-C(S):	7.3 lb (3.3 kg)
LCC-36(S):	6.2 lb (2.8 kg)
LCC-36-C(S):	10.6 lb (4.8 kg)
Mounting Surfaces:	Wood stud, concrete and various other applications *(Requires accessory)*

ACCESSORIES pg#

ACC, CMJ, DCS, DCT Models:
Ceiling Plates 137-139
ADJ, EXT Models:
Ceiling Extensions 139-140

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

PARAMOUNT™ by Peerless

LCD Ceiling Mount

For 15" to 37" LCD Screens

- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Three adjustable extension lengths:
  PC930A models - 9.8" - 13.9"
  PC930B models - 13.78" - 21.89"
  PC930C models - 20.24" - 34.02"
- Continuous tilt of +15/-5° with optional lock in 5° increments
- 360° swivel provides limitless screen placement opportunities
- Internal cable management within extension channels for clean, clutter-free appearance
- Safety catch designed into extension channels to ensure user and equipment safety

* Includes theft resistant hardware for attaching screen to mount

MODELS

Universal Models with 9.7" - 13.9" extension::
Security Fasteners*

PC932A	Black
PC932A-S	Silver
PC932A-W	White

Universal Models with 13.78" - 21.89" extension:
Security Fasteners*

PC932B	Black
PC932B-S	Silver
PC932B-W	White

Universal Models with 20.24" - 34.02" extension:
Security Fasteners*

PC932C	Black
PC932C-S	Silver
PC932C-W	White

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75/100/200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
PC932A(-S)(-W): 6.5" x 9.8"-13.9" x 6.5" (16.5 x 24.8-35.3 x 16.5 cm)
PC932B(-S)(-W): 6.5" x 13.78"-21.89" x 6.5" (16.5 x 35-55.6 x 16.5 cm)
PC932C(-S)(-W): 6.5" x 20.24"-34.02" x 6.5" (16.5 x 51.4-86.4 x 16.5 cm)

Tilt: +15/-5°
Swivel: 360°

Max Load: 80 lb (36.2 kg)

Ship Weight:
PC932A(-S)(-W): 6.1 lb (2.7 kg)
PC932B(-S)(-W): 6.7 lb (3 kg)
PC932C(-S)(-W): 7.6 lb (3.4 kg)

Mounting Surfaces: Wood joist and concrete

Quickship Item®

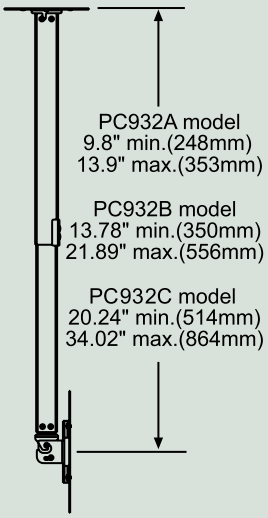



To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Flat Panel Ceiling Mount

For 32" to 71" LCD and Plasma Screens

Universal Models

- 20° tilt
- 360° swivel
- Portrait or landscape orientation
- Simple hook-on screen installation

PLCM-UNL-CP:
Universal mount for landscape mounting of 32" to 60" screens to wood joist on 16" centers or concrete ceiling.

PLCM-UNL:
Universal mount for landscape mounting of 32" to 60" screens to various ceilings. Requires ceiling plate, sold separately.

PLCM-UN1-CP:
Universal mount for portrait or landscape mounting of 32" to 50" screens to wood joist on 16" centers or concrete ceiling.

PLCM-UN1:
Universal mount for portrait or landscape mounting of 32" to 50" screens to various ceilings. Requires ceiling plate, sold separately.

Dedicated Models

PLCM-1CP:
Dedicated mount for up to 71" screens mounting to wood joist on 16" centers or concrete ceiling. Requires screen-specific adapter, sold separately.

PLCM-1:
Dedicated mount for up to 71" screens to various ceilings. Requires screen-specific adapter and ceiling plate, both sold separately.

PLCM-2:
Base mount only for up to 71" screens. Requires appropriate extension column, screen-specific adapter and ceiling plate for various ceilings, all sold separately.

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

⚠ Requires screen-specific adapter to be purchased separately

Model	Width	Height	Depth	Max Load	Ship Weight
PLCM-UNL-CP	30.75" (78.1 cm)	42.63" (108.2 cm)	4.43" (11.2 cm)	200 lb (90.7 kg)	33.3 lb (15.1 kg)
PLCM-UNL	30.75" (78.1 cm)	41.54" (105.5 cm)	4.43" (11.2 cm)	200 lb (90.7 kg)	30.3 lb (13.7 kg)
PLCM-UN1-CP	27.5" (69.8 cm)	40" (101.6 cm)	3.92" (9.9 cm)	125 lb (56.6 kg)	30.10 lb (13.6 kg)
PLCM-UN1	27.5" (69.8 cm)	38.91" (98.8 cm)	3.92" (9.9 cm)	125 lb (56.6 kg)	27.40 lb (12.4kg)
PLCM-1CP	18" (45.7 cm)	34.59" (87.8 cm)	3.61" (9.1 cm)	225 lb (102 kg)	18.70 lb (8.4 kg)
PLCM-1	10.24" (20 cm)	33.5" (85 cm)	3.25" (8.2 cm)	225 lb (102 kg)	16 lb (7.2 kg)
PLCM-2	10.24" (20 cm)	5.71" (14.5 cm)	3.25" (8.2 cm)	225 lb (102 kg)	7.50 lb (3.4 kg)

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

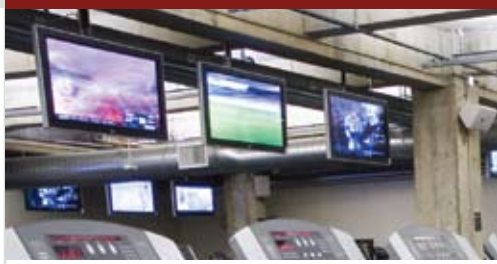

MODELS

Universal Models:
Security Fasteners*

PLCM-UNL-CP	Black
PLCM-UNL	Black
PLCM-UN1-CP	Black
PLCM-UN1	Black

Dedicated Models:
Screen Adapter Purchased Separately** ⚠

PLCM-1	Black
PLCM-1CP	Black
PLCM-2	Black

SCREEN ADAPTER

Universal Models:
PLCM-UNL models include screen adapter to accommodate mounting holes spaced up to 28.75" horizontally and 17.05" vertically

PLCM-UN1 models include screen adapter to accommodate mounting holes spaced up to 27.6" horizontally and 17" vertically

Dedicated Models:
Requires screen-specific adapter to be sold separately

SPECIFICATIONS

Dimensions: See chart

Tilt: 20°
Swivel: 360°

Max Load: See chart

Ship Weight: See chart

Mounting Surfaces: Wood joist, concrete and various other applications *(May require accessory)*

Quickship Item ®

c UL us

ACCESSORIES pg#

ACC, CMJ, DCS, DCT models:
Ceiling Plates 137-139
EXT, ADJ models:
Ceiling Extensions 139

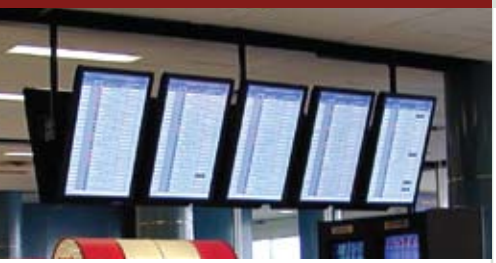

MODELS

Dedicated Models:
Security Fasteners*
Screen Adapter Purchased Separately**

PLB-1 Black

SCREEN ADAPTER

Dedicated Models:
Requires two screen-specific adapters to be purchased separately.

SPECIFICATIONS

Dimensions:	(W x H x D) 10" x 5.4" x 9.46" (25.4 x 13.7 x 24 cm)
Tilt:	20°
Swivel:	360°
Max Load:	300 lb (136 kg)
Ship Weight:	21 lb (9.5 kg)
Mounting Surfaces:	Virtually all ceiling structures *(Requires accessory)*

c UL us

ACCESSORIES pg#

DCS, DCT Models:
Ceiling Plates 138
ADD Models:
Ceiling Extensions 140

Dual-Screen Ceiling Mount

For 30" to 50" LCD and Plasma Screens

- Entire unit swivels 360° with swivel stop feature
- 20° adjustable tilt (for each screen)
- Screens mount vertically or horizontally
- Requires extension column and ceiling plate, sold separately

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

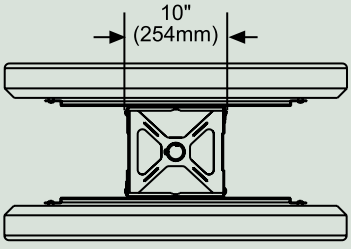

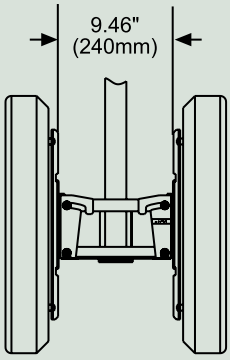

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel Conversion Kit

For up to 50" LCD and Plasma Screens

- Retrofits to any Jumbo™ single or double wall arms
- Connects to any 1 ½" NPT pipe
- 360° swivel for ceiling applications
- Tilts up to 20°
- Places flat panel screen in the same location as previous CRT screen
- PLCK-UNL includes universal adapter plate for 32" to 50" screens

Universal Models

Dedicated Models

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

Single Jumbo Wall Arm		
Double Jumbo Wall Arm		
Jumbo Ceiling		

MODELS

Universal Models
Security Fasteners*
PLCK-UNL Black

Dedicated Models
Screen Adapter Purchased Separately**
PLCK-1 Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17.0" vertically

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	30.25" x 27.6" x 4.6" (76.8 x 70.1 x 11.6 cm)
Dedicated Models:	10.3" x 19.2" x 3.5" (26.1 x 48.7 x 8.8 cm)
Tilt:	20°
Swivel:	360°
Max Load:	125 lb (56.6 kg)
Ship Weight:	
Universal Models:	23.9 lb (10.8 kg)
Dedicated Models:	14.5 lb (6.6 kg)
Mounting Surfaces:	Attaches to Jumbo single wall arms, double wall arms and 1 ½" NPT pipe

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

MODELS

Dedicated Models:
Security Fasteners*
Screen Adapter Purchased Separately**

MDJ700	In-line Display	Black
MDJ710	In-line Display	Black
MDJ720	In-line Display	Black
MDJ701	Curvilinear Display	Black
MDJ711	Curvilinear Display	Black
MDJ721	Curvilinear Display	Black
MDJ760	Circular Display	Black

SCREEN ADAPTER

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions: (Pipe Length)
MDJ700: 120" (304.8 cm)
MDJ710: 180" (457.2 cm)
MDJ720: 240" (609.6 cm)
MDJ701: 120" (304.8 cm)
MDJ711: 180" (457.2 cm)
MDJ721: 240" (609.6 cm)
MDJ760: 48" (122 cm) (Diameter)

Max Load: 600-1200 lb (272-545 kg) depending on ceiling attachments used

Ship Weight:
MDJ700: 31 lb (14.1 kg)
MDJ710: 45 lb (20.4 kg)
MDJ720: 62 lb (28.1 kg)
MDJ701: 27 lb (20.4 kg)
MDJ711: 35 lb (15.9 kg)
MDJ721: 56 lb (24.5 kg)
MDJ760: 45 lb (20.4 kg)

Mounting Surfaces: Virtually all ceiling surfaces *(Requires accessory)*

ACCESSORIES

See chart for components needed to complete installation.

Contact Customer Care for CRT applications

Multi-Display Ceiling Mounts

For 32" to 50" LCD and Plasma Screens

Circular configuration

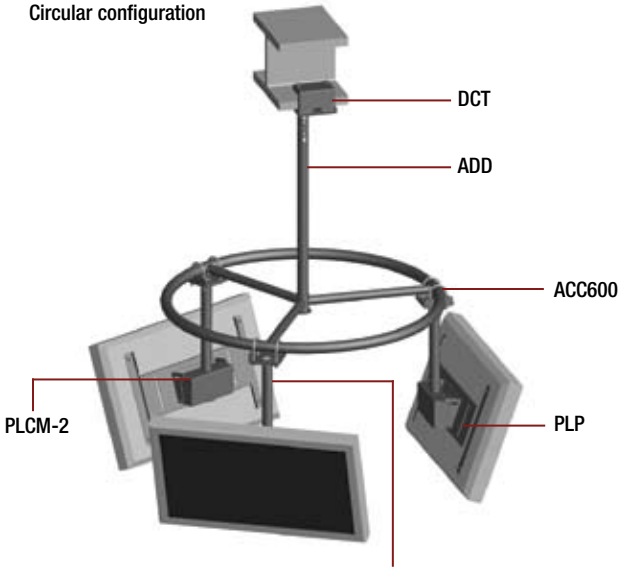

- Multi-screen display for 3 to 4 plasma or LCD screens
- Three different configurations: in-line, curvilinear, and circular
- Choose desired ceiling drop length and drop length of equipment from pipe
- 0° to 20° adjustable tilt
- 360° swivel for each screen

Curvilinear configuration

In-line configuration

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

Circular

Screen Size	Number of screens	MDJ model*	PLCM-2 screen mount	PLP screen adapter plate (see MountFinder™)	EXT or ADJ extension column (connects PLCM-2 to ACC600)	ACC600 interface bracket to MDJ mount	ADD* support extension column	DCT ceiling decoupler
32"-37"	3	MDJ760	3	3	3	3	1	1
40"-42"	3	MDJ760	3	3	3	3	1	1
50"	3	MDJ760	3	3	3	3	1	1
32"-37"	4	MDJ760	4	4	4	4	1	1
40"-42"	4	MDJ760	4	4	4	4	1	1

* Columns over 9' will be covered in vinyl

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

In-Line

Screen size	Number of screens	MDJ model	PLCM-2 screen mount	PLP screen adapter plate (see MountFinder™)	EXT or ADJ extension column (connects PLCM-2 to ACC600)	ACC600 interface bracket to MDJ mount	ADD support extension column	DCT ceiling decoupler
32"-37"	3	MDJ700	3	3	3	5	2	2
40"-42"	3	MDJ700	3	3	3	5	2	2
50"	3	MDJ710	3	3	3	5	2	2
32"-37"	4	MDJ700	4	4	4	6	2	2
40"-42"	4	MDJ710	4	4	4	6	2	2
50"	4	MDJ720	4	4	4	6	2	2

Curvilinear

Screen size	Number of screens	MDJ model	PLCM-2 screen mount	PLP screen adapter plate (see MountFinder™)	EXT or ADJ extension column (connects PLCM-2 to ACC600)	ACC600 interface bracket to MDJ mount	ADD support extension column	DCT ceiling decoupler
32"-37"	3	MDJ701	3	3	3	5	2	2
40"-42"	3	MDJ701	3	3	3	5	2	2
50"	3	MDJ711	3	3	3	5	2	2
32"-37"	4	MDJ701	4	4	4	6	2	2
40"-42"	4	MDJ711	4	4	4	6	2	2
50"	4	MDJ721	4	4	4	6	2	2

Multi-Display System Components

Multi-Display Mount	Model	Length	Ring Diameter	Pipe Diameter	Load Capacity	Ship Weight
	**MDJ700** (in-line)	120" *(304.8 cm)*	NA	1.9" OD	1000 lb *(453.6 kg)*	31 lb *(14.1 kg)*
	MDJ710 (in-line)	180" *(457.2 cm)*	NA	1.9" OD	1200 lb *(544.3 kg)*	45 lb *(20.4 kg)*
	MDJ720 (in-line)	240" *(609.6 cm)*	NA	1.9" OD	1500 lb *(680.4 kg)*	62 lb *(28.1 kg)*
	MDJ701 (curved)	120" *(304.8 cm)*	NA	1.9" OD	1000 lb *(453.6 kg)*	27 lb *(12.2 kg)*
	MDJ711 (curved)	180" *(457.2 cm)*	NA	1.9" OD	1200 lb *(544.3 kg)*	35 lb *(15.9 kg)*
	MDJ721 (curved)	240" *(609.6 cm)*	NA	1.9" OD	1500 lb *(680.4 kg)*	56 lb *(25.4kg)*
	MDJ760 (circular)	NA	48" *(122 cm)*	1.9" OD	600 lb *(272.16 kg)*	45 lb *(20.4 kg)*

Screen Mount	Model	Ship Weight
	PLCM-2 PLP screen adapter required. See MountFinder™ to verify screen compatibility. See page 67 for details	13.9 lb *(6.3 kg)*

Multi-Display Interface Bracket	Model	Description	Load Capacity	Ship Weight
	ACC600 See page 138 for details	Interfaces between flat panel mount to MDJ mount, and MDJ mount to ceiling support structure.	1200 lb *(544.3 kg)*	3.8 lb *(1.7 kg)*

Fixed or Adjustable Extension Columns for Attaching Mount	Model	Drop Length*	
	EXT/ADJ models See page 139 for details	8"-12'	* Fixed length columns provide 8" to 12' drop lengths. Adjustable length columns provide 6" to 12' drop lengths.

Fixed or Adjustable Extension Columns for Ceiling Decouplers	Model	Drop Length*	
	ADD models See page 140 for details	12"-12'	* Fixed length columns provide 1' to10' drop lengths. Adjustable length columns provide 1' to 12' drop lengths.

Ceiling Decoupler	Model	Ceiling type	Load Capacity	Ship Weight
 See page 116 for details	**DCS400**	For structural or finished ceiling	1200 lb *(544.3 kg)*	7.8 lb *(3.5 kg)*
	DCT300	For truss ceiling	1200 lb *(544.3 kg)*	4.6 lb *(2.1 kg)*
	DCT500	For I-Beams	600 lb *(272.16 kg)*	9.4 lb *(4.3 kg)*
	DCT600	For I-Beams	600 lb *(272.16 kg)*	13.1 lb *(6 kg)*
	DCT700	For I-Beams	600 lb *(272.16 kg)*	13.6 lb *(6.2 kg)*
	DCT800	For I-Beams	600 lb *(272.16 kg)*	14 lb *(6.4 kg)*
	DCT900	For I-Beams	600 lb *(272.16 kg)*	9 lb *(4.1 kg)*

Flat Panel

MODELS

Universal Models:
Standard Fasteners*
LCT-101 Black

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
4.5" x 10.4"-18.5" x 16.05"-23.14"
(11.5 x 26.4-47 x 40.8-58.8 cm)

Tilt: ±60°
Swivel: 360°
Roll: 360°

Max Load: 25 lb (11.3 kg)

Ship Weight: 12 lb (5.4 kg)

Mounting Surfaces: Desktop

Quickship Item®

Articulating Desktop Arm

For 10" to 22" LCD Screens

- Three pivot points with up to 360° swivel
- ±60° tilt
- Extension arm included
- Mounting options for all surfaces (desk clamp, desk bolt included)
- Up to 360° roll to orient screen horizontally or vertically
- Compact retractable design increases work space
- Durable gas-strut and ball-joint system for smooth, stable operation
- Strong and attractively styled die cast aluminum alloy construction
- VESA® 75 and 100 compliant
- Non-VESA® adapter plates also available

* Includes standard hardware (hex or Phillips) for attaching screen to mount

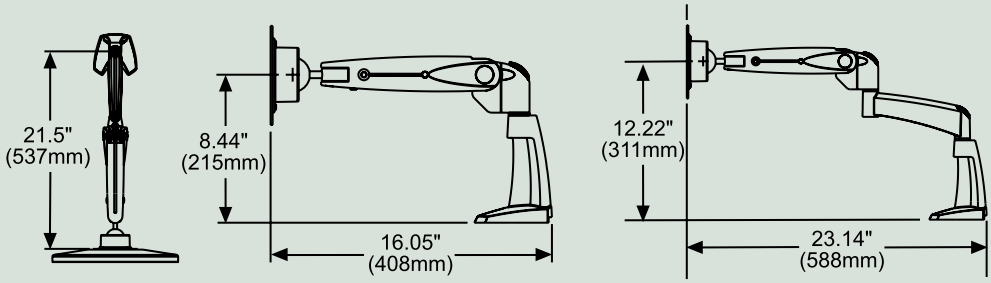

peerless® MOUNTS

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Height-Adjustable Desktop Mount

For 10" to 22" LCD Screens

- Side-to-side swivel can be restricted to ±45° or less
- 50° upward tilt and 30° downward tilt
- Height adjustable at four 1" increments from 12.3" to 16.3"
- Comes with external clips for cord management
- VESA® 75 and 100 compliant
- Non-VESA® adapter plates available

* Includes standard hardware (hex or Phillips) for attaching screen to mount



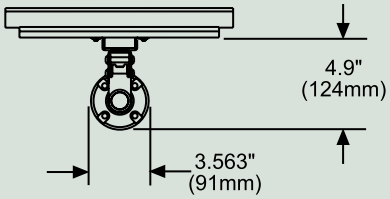

MODELS

Universal Models:
Standard Fasteners*

LCH-100	Black
LCH-100G	Gray

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 3.56" x 12.37"-16.37" x 4.9" (9.1 x 31.4-41.6 x 12.4 cm)
Tilt:	+30/-50°
Swivel:	±45°
Roll:	90°
Max Load:	25 lb (11.3 kg)
Ship Weight:	5 lb (2.3 kg)
Mounting Surfaces:	Desktop

Quickship Item®

Flat Panel

MODELS

Universal Models:
Standard Fasteners*

LCV-100 Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions:	(W x H x D) 4.5" x 16.48" x 3" (11.4 x 41.9 x 7.6 cm)
Tilt:	±30°
Swivel:	360°
Max Load:	25 lb (11.3 kg)
Ship Weight:	4.5 lb (2.1 kg)
Mounting Surfaces:	Wood and/or wood composite surfaces

Quickship Item®

Height-Adjustable Desktop Mount

For 10" to 22" LCD Screens

- 360° swivel
- 30° adjustable backward or forward tilt
- Height adjustment with a knob allows the screen to travel 9.5" up and down the arm and tightens into place
- Bolts to wood and/or wood composite surfaces .75" to 1.5" thick
- VESA® 75 and 100 compliant
- Non-VESA® adapter plates available

* Includes standard hardware (hex or Phillips) for attaching screen to mount

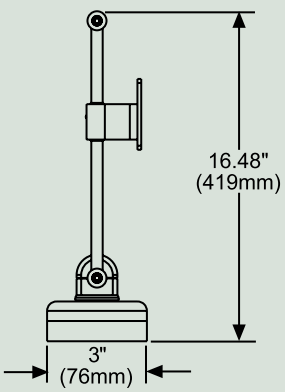

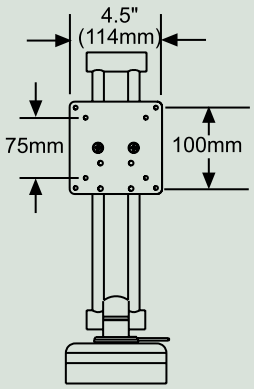

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Tabletop Stand

For 32" to 50" LCD and Plasma Screens

- Base can either rest in a fixed position or swivel with 360° rotation
- 5° backward and 10° forward tilt
- Cable management to keep wires out of the way
- Base comes in black graphite laminate
- Felt ring on bottom of base protects tabletop surface

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

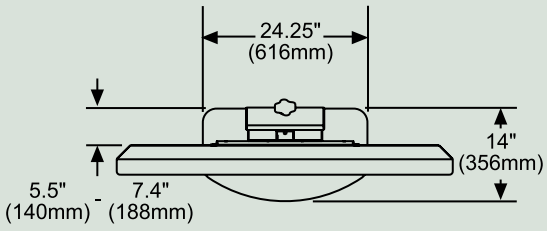



MODELS

Dedicated Models
Security Fasteners*
Screen Adapter Purchased Separately**

PLT-BLK Black

SCREEN ADAPTER

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D) 24.25" x 22.63" x 14" (61.6 x 57.5 x 35.6 cm)
Tilt:	+10/-5°
Swivel:	360°
Max Load:	150 lb (68 kg)
Ship Weight:	32.5 lb (14.74 kg)
Mounting Surfaces:	Tabletop

Quickship Item®

Flat Panel

MODELS

Universal Models:
Standard Fasteners*

LCFS-100	Black
LCFS-100S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate VESA® 75 and 100 mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
23" x 60.75"-80" x 24"
(58.4 x 154.3-203.2 x 61 cm)

Swivel: ±90°

Max Load:
Freestanding: 25 lb (11.3 kg)
Bolted down: 40 lb (18.1 kg)

Ship Weight: 26 lb (11.8 kg)

Mounting Surfaces: All floor surfaces

Pedestal Stand

For 10" to 30" LCD Screens

- VESA® 75 and 100 compliant
- Non-VESA® adapter plates also available
- Adjustable height from 60.75" to 80"
- Feet can move inward along the tubular structure if required
- 180° of swivel at the head (up to 90° on each side)
- Can be used freestanding (up to 25 lb) or bolted down (up to 40 lb)
- Comes with hardware to bolt to concrete flooring

* Includes standard hardware (hex or Phillips) for attaching screen to mount



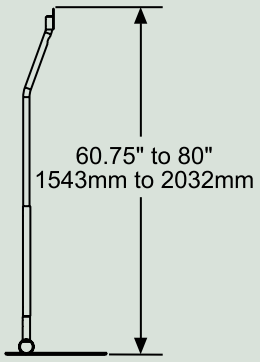

peerless® MOUNTS

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

SmartMount™

Flat Panel TV Stand

For 32" to 50" LCD and Plasma Screens

- Designed to complement the look of any room with its modern colors and stylish design
- Incremental tilt of -2°, 0° and +5° provides ideal screen angle
- Continuous vertical adjustment for perfect viewing height
- Adjustable tempered glass shelves to hold A/V components and accessories (additional shelf available)



- Internal cable management neatly hides all cords and cables for a clean, clutter-free appearance

* Includes standard hardware (hex or Phillips) for attaching screen to mount

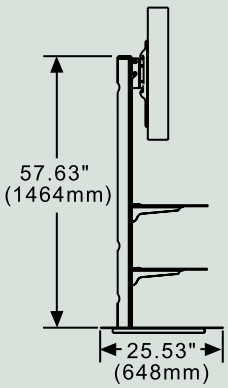

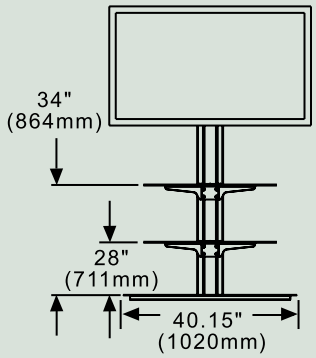

MODELS

Universal Models:
Standard Fasteners*

SS550P	High gloss black with 2 tinted shelves
SS550P-S	Silver with 2 tinted shelves
SGLB01	Black with 1 clear shelf
SGLS01	Silver with 1 clear shelf

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.75" horizontally and 17.05" vertically

SPECIFICATIONS

Dimensions:	(W x H x D) 40.15" x 57.63" x 25.53" (102 x 146.4 x 64.8 cm)
Tilt:	-2°, 0°, +5°
Max Load:	250 lb (113.3 kg) 150 lb screen (68 kg) 50 lb per shelf (22.6 kg)
Ship Weight:	
SS models:	95 lb (43.1 kg)
SGL models:	85 lb (38.5 kg)
Mounting Surfaces:	All floor surfaces

c UL us

ACCESSORIES pg#

ACC317:	Tempered Glass Shelf (Clear glass, black bracket)	144
ACC317-S:	Tempered Glass Shelf (Clear glass, silver bracket)	144
ACC318:	Tempered Glass Shelf (Tinted glass, black bracket)	144
ACC318-S:	Tempered Glass Shelf (Tinted glass, silver bracket)	144
ACC318-GB:	Tempered Glass Shelf (Tinted glass, high gloss black bracket)	144

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Flat Panel

MODELS

Dedicated Models:
Security Fasteners*
Screen Adapter Purchased Separately for Non-VESA® Screens**

FPZ-600 Black

SCREEN ADAPTER

Dedicated Models:
Includes universal screen adapter to accommodate VESA® 100, 200 x 100 and 200 x 200 mm mounting holes.
Non-VESA® compatible screens require screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions: (W x H x D)
28.57" x 72" x 36"
(73 x 182.9 x 91.4 cm)

Max Load: 200 lb (90.7 kg) per screen up to four screens

Ship Weight: 118 lb (53.5 kg)

Mounting Surfaces: All floor surfaces

ACCESSORIES pg#

ACC604: Dual-Screen Cartridge 144

Flat Panel Stand

For 32" to 60" LCD and Plasma Screens

- VESA® 100, 200 x 100 and 200 x 200 mm compliant
- Supports non-VESA® screens with additional PLP screen adapter plate (sold separately)
- Fits single or back-to-back 32" to 60" flat panel screens (up to four with additional dual-screen cartridge)
- Portrait or landscape orientation
- Internal cable management for a clean, clutter-free appearance
- Height adjustable on 6' poles

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately





To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Pedestal Mount

For 32" to 50" LCD and Plasma Screens

- Choice of 5', 6', 7' or 8' pedestal height
- 15° forward tilt for viewing flexibility
- 360° swivel with swivel stop
- Screen can be changed from landscape to portrait orientation without screen removal
- Internal cord management
- Concrete floor anchors included

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

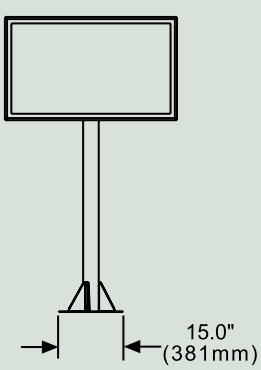

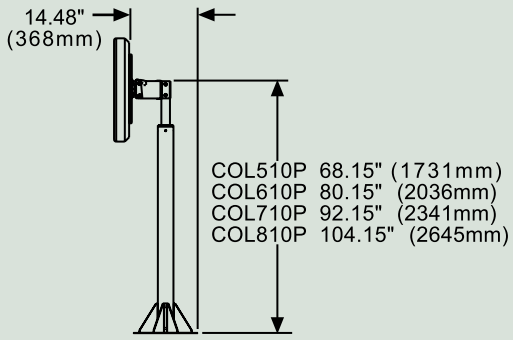

MODELS

Dedicated Models:
Security Fasteners*
Screen Adapter Purchased Separately**

COL510P	5 feet	Black
COL610P	6 feet	Black
COL710P	7 feet	Black
COL810P	8 feet	Black

SCREEN ADAPTER

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions: (W x H x D)
COL510P: 15" x 68.15" x 14.48" (38.1 x 173.1 x 36.8 cm)
COL610P: 15" x 80.15" x 14.48" (38.1 x 203.6 x 36.8 cm)
COL710P: 15" x 92.15" x 14.48" (38.1 x 234.1x 36.8 cm)
COL810P: 15" x 104.15" x 14.48" (38.1 x 264.5 x 36.8 cm)

Tilt: 15°
Swivel: 360°

Max Load: 150 lb (68 kg)

Ship Weight:
COL510P: 36 lb (16.4 kg)
COL610P: 39 lb (17.7 kg)
COL710P: 42 lb (19 kg)
COL810P: 45 lb (20.4 kg)

Mounting Surfaces: Concrete

ACCESSORIES pg#

ACC833: Equipment Accessory Shelf 144

Flat Panel

SmartMount™

Flat Panel TV Cart

For 32" to 60" LCD and Plasma Screens

MODELS

Universal Models:
Security Fasteners*

SR560M Black cart with metal shelf
SR560G Black cart with glass shelf

Dedicated Models:
Screen Adapter Purchased Separately**

SR1M Black cart with metal shelf
SR1G Black cart with glass shelf

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.75" horizontally and 17.05" vertically

Dedicated Models:
Requires screen-specific adapter to be purchased separately

SPECIFICATIONS

Dimensions: (W x H x D)
35.6" x 65.05" x 26.99"
(90.4 x 166.4 x 68.5 cm)

Tilt: -2°, 0°, +5°

Max Load: 250 lb (113.3 kg)
150 lb screen (68 kg)
50 lb per shelf (22.6 kg)

Ship Weight:
SR560M: 87.3 lb (38.5 kg)
SR560G: 88.8 lb (40.2 kg)
SR1M: 76.8 lb (34.8 kg)
SR1G: 78.3 lb (35.5 kg)

ACCESSORIES pg#

ACC310: Feet Accessory 143
ACC313: Metal Shelf 144
ACC314: Laptop Arm 144
ACC315: Base Shelf 143
ACC316: Safety Belt 144
ACC318: Tempered Glass Shelf 144
ACC319: Video Conferencing Shelf 143
ACC320: Electrical Outlet Strip with Cord Wrap 143

Universal Models

- Incremental tilt of -2°, 0° and +5° locks in the ideal viewing angle
- Continuous vertical adjustment for perfect viewing height
- Maneuvers easily on 4" swivel casters (two locking)
- Adjustable metal or tempered glass shelf to hold A/V components and accessories

Dedicated Models

- Internal cable management for clean, clutter-free appearance

* Includes theft resistant hardware for attaching screen to mount
** Dedicated adapter plates come in flat black and include security fasteners

Requires screen-specific adapter to be purchased separately

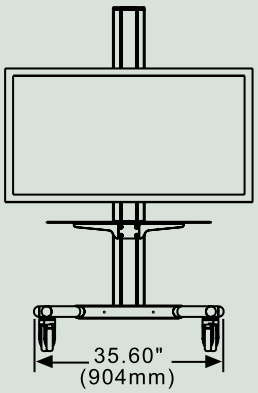

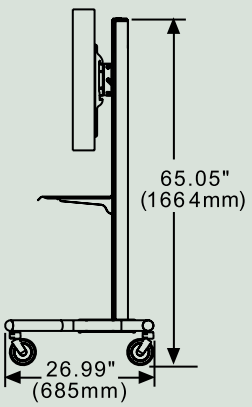

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Panel Shield™
Flat Panel Screen Cover

For 40" and 42" LCD and Plasma Screens

- Aluminum construction
- Window prevents touching buttons or splashing liquids on screen
- Four corner-adjustable screen mounting attachments
- Does not interfere with conventional mount mechanism
- Accommodates screen bezels 39.9" to 41.7" wide, 24.1" to 25.9" high and 1.2" to 3.5" deep
- Requires Peerless flat panel mount to support screen

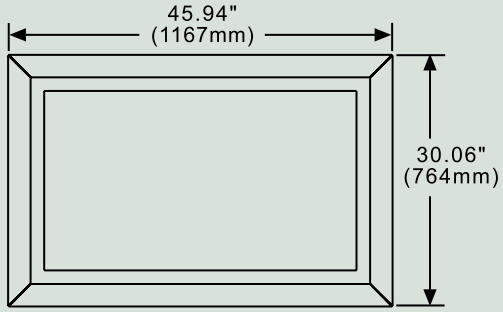

MODELS

EEPS-42A	Silver

SCREEN ADAPTER

Requires Peerless flat panel wall, ceiling or floor mount with screen adapter plate

SPECIFICATIONS

Dimensions:	(W x H x D) 45.94" x 30.06" x 4.06" (116.7 x 76.4 x 10.3 cm)
Ship Weight:	35 lb (15.9 kg)
Mounting Surfaces:	Flat panel screen

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

Flat Panel

MODELS

Universal Models:
Fan models:

EL42F	Black
EL42F-S	Silver
EL50F	Black
EL50F-S	Silver

AC with heater models:

EL42AH	Black
EL42AH-S	Silver
EL50AH	Black
EL50AH-S	Silver

SCREEN ADAPTER

Universal Models:
Includes universal screen adapter to accommodate mounting holes spaced up to 28.7" horizontally and 17" vertically

Note: Refer to chart below to ensure screen compatibility

SPECIFICATIONS

Dimensions: (W x H x D)
EL42 models: 47.94" x 31.94" x 10.45" (121.7 x 81.1 x 26.5 cm)
EL50 models: 55.94" x 36.94" x 10.45" (142 x 93.8 x 26.5 cm)

Max Display Power Load:
EL42 models: 290 Watts
EL50 models: 500 Watts

Allowable Ambient Temperature Range:
EL42/50F(-S): 41°F to 95°F
EL42/50AH(-S): -10°F to 104°F

Max Load: 120 lb (54.4kg)

Ship Weight:
EL42F(-S): 135 lb (61.2 kg)
EL42AH(-S): 190 lb (66.1 kg)
EL50F(-S): 155 lb (70.3 kg)
EL50AH(-S): 210 lb (95.2 kg)

Mounting Surfaces: Wood stud, concrete, wall, ceiling or floor

ACCESSORIES pg#

EWI(S): Indoor Wall Mount 83
EWO-SS: Outdoor Wall Mount 83
ECI300(S): Indoor Ceiling Mount 83
ECO300-SS: Outdoor Ceiling Mount 83
EPI800(S): Indoor Post Mount 83
EPO800-SS: Outdoor Post Mount 83

Indoor/Outdoor Flat Panel Environmental Enclosures

For 42" to 50" LCD and Plasma Screens

- For indoor and outdoor installations
- Aluminum body –NEMA certified
- Anti-reflective tempered glass window
- Gas struts for easy enclosure cover opening
- 6-outlet 115V 15 amp power strip
- Slip hinges for front cover removal
- 3 tubular keyed compression locks
- Fan* models or closed loop AC** with heater models
- Customizable enclosures available for up to 65" screens. Call for specifications

Requires wall, ceiling or post mounting accessory to be purchased separately

* Fan model: for no solar exposure allowable ambient temperature range 41° to 95°F
** AC with heater model: for allowable ambient temperature range -10° F to 104° F - allowable humidity 20%-100%

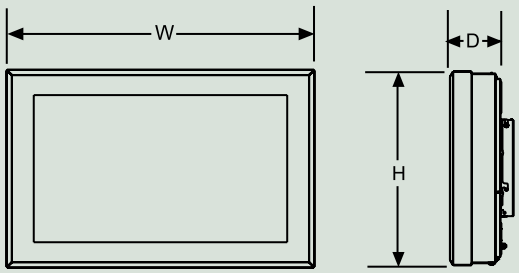

	EL42 models	EL50 models
H	31.94" (811mm)	36.94" (938mm)
W	47.94" (1217mm)	55.94" (1421mm)
D	10.45" (265mm)	10.45" (265mm)

Maximum display size enclosure can accommodate	
EL42 - fits 37"-42" flat panel TV's	**EL50 - fits 50" flat panel TV's**
41.5" wide	49.5" wide
25.5" high	27" high
5.5" deep	5.5" deep

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Outdoor Enclosure
Wall Mount: *EWO-SS*

- Stainless steel wall mount for EL model enclosures
- Mounts to wood stud wall or concrete

Max Load: 300 lb (136 kg)
Ship Weight: 35 lb (15.9 kg)
Color: Silver

Outdoor Enclosure
Ceiling Mount: *ECO300-SS*

- Stainless steel ceiling mount for EL model enclosures
- Includes exterior mounting bracket interface
- 3' 2" NPT extension column
- Mounts to structural concrete ceiling

Max Load: 400 lb (181.4 kg)
Ship Weight: 60 lb (27.2 kg)
Color: Silver

Outdoor Enclosure
Post Mount: *EPO800-SS*

- Stainless steel post mount for EL model enlosures
- Includes 96" post, exterior mounting plate and post hardware
- Mounts to concrete floor
- Ships in 3 cartons

Max Load: 500 lb (226.8 kg)
Ship Weight: 200 lb (90.7 kg)
Color: Silver

Indoor Enclosure
Wall Mount: *EWI, EWI-S*

- Wall mount plate for EL enclosures
- Mounts to wood stud wall or concrete

Max Load: 300 lb (136 kg)
Ship Weight: 35 lb (15.9 kg)
Color: Black or silver

Indoor Enclosure
Ceiling Mount: *ECI300, ECI300-S*

- Ceiling mount for EL model enclosures
- Includes exterior mounting bracket interface
- 3' 2" NPT extension column
- Mounts to structural concrete ceiling
- Fasteners not included

Max Load: 400 lb (181.4 kg)
Ship Weight: 50 lb (22.6 kg)
Color: Black or silver

Indoor Enclosure
Post Mount: *EPI800, EPI800-S*

- Floor post mount for concrete installations with EL enclosures
- Includes 96" post, exterior mounting plate and post hardware
- Ships in 3 cartons

Max Load: 500 lb (226.8 kg)
Ship Weight: 200 lb (90.7 kg)
Color: Black or silver

Projector mounts

Universal Mounts

- Universal solutions for most projectors up to 50 lb
- All projector mounts are pre-assembled for quick and easy installation
- Security and non-security options available

Security Mounts

- Security fasteners at every connection point
- Key-locking tray design prevents access to security fasteners
- Universal tray pattern accommodates most projectors

Enclosures

- All-steel construction for durable protection
- Adjustable bars to accommodate projector lens placement
- Can be retrofitted around any existing projector installation

Carts

- For projectors and A/V equipment
- Easy maneuverability across various flooring surfaces and through doorways
- Large shelves to hold various types of A/V Equipment

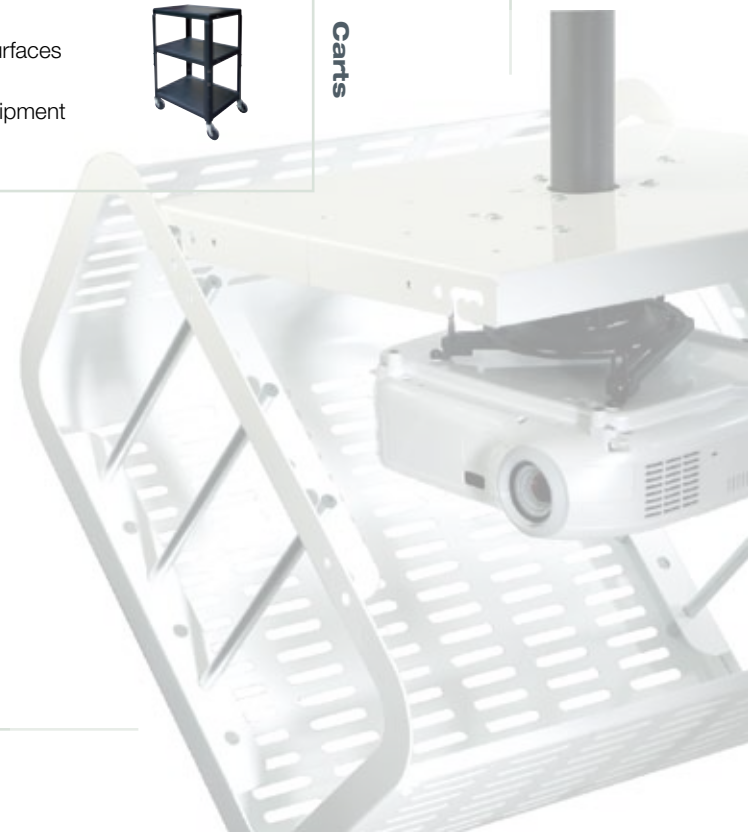

PRG Precision Gear Projector Mount

For Projectors up to 50 lb

- Spider® universal adapter plate extends 7.1" to 16.55" to fit most projector models
- Cable management allows cables to be routed through projector mount and out of sight
- Patent-pending precision gear provides ImageLock™ alignment to accurately hold image position, virtually removing any sag or drift
- Two adjustment knobs control tilt and roll image alignment. Engage using a Phillips screwdriver or extend knobs to use by hand.
- Quick-release mechanism to easily service projector
- Horizontal wrench access slots make flush mounting installations fast & easy
- Pre-installed security screws provide optional tilt and roll lock to prevent tampering with adjustment knobs

* Includes theft resistant hardware for attaching projector to mount
** Dedicated adapter plates come in black, silver or white and include security fasteners

⚠ Requires projector specific adapter to be purchased separately

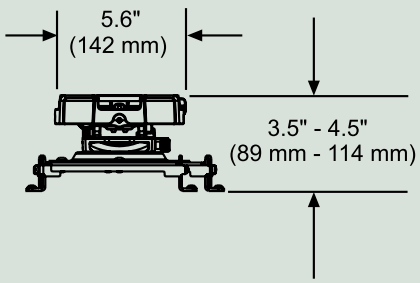



MODELS

Universal Models
Security Fasteners*

PRG-UNV	Black
PRG-UNV-S	Silver
PRG-UNV-W	White

Dedicated Models
Projector Adapter Plate Purchased Separately**

PRG-1	Black
PRG-1S	Silver
PRG-1W	White ⚠

PROJECTOR ADAPTER

Universal Models:
Includes universal adapter plate to accommodate projector mounting holes from 7.1" to 16.5"

Dedicated Models:
Requires projector specific adapter plate to be purchased separately

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	7.1" x 3.4" x 7.1" (18 x 8.6 x 18 cm)
Dedicated Models:	5.7" x 2.5" x 5.5" (14.6 x 6.3 x13.9cm)
Tilt:	±20
Swivel:	360° (±15° when flush mounted)
Roll:	±10°
Max Load:	50 lb (22.6 kg)
Ship Weight:	
Universal Models:	3.5 lb (1.6 kg)
Dedicated Models:	1.8 lb (.82 kg)
Mounting Surfaces:	Wood joist, concrete and other structures *(Other structures require accessory)*

ACCESSORIES pg#

ACC, CMJ Models: Ceiling Plates 137-139
ADJ, EXT Models: Extension Columns 139
PWA14: Projector Wall Arm 141
EX Models: Ceiling/Wall Extension Kit 140

Projector

MODELS

Universal Models
Security Fasteners*

PRS-UNV	Black
PRS-UNV-S	Silver
PRS-UNV-W	White

Dedicated Models
Projector Adapter Plate Purchased Separately**

PRS-1	Black
PRS-1S	Silver
PRS-1W	White

Kitted Dedicated Models
Includes Dedicated Projector Adapter Plate

PRS-models	Black

PROJECTOR ADAPTER

Universal Models:
Includes Spider® universal adapter plate to accommodate projector mounting holes from 7.1" to 16.55"

Dedicated Models:
Requires projector specific adapter plate to be purchased separately

Kitted Dedicated Models:
Includes dedicated projector adapter plate.
Use MountFinder™ to verify model.

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	7.1"-16.55" x 3.41"-4.34" x 7.1"-16.55" (18-42 x 8.7-11 x 18-42 cm)
Dedicated Models:	4.6" x 2.2" x 4.6" (11.6 x 5.5 x 11.6 cm)
Tilt:	+20/-5°
Swivel:	360° (±30° when flush mounted)
Roll:	±10°
Max Load:	25 lb (11.3 kg)
Ship Weight:	
Universal Models:	3.2 lb (1.4 kg)
Dedicated Models:	1.4 lb (.6 kg)
Mounting Surfaces:	Wood joist, concrete and other structures *(Other structures require accessory)*

Quickship Item®

c UL us

ACCESSORIES pg#

ACC, CMJ Models: Ceiling Plates 137-139
ADJ, EXT Models: Extension Columns 139
ACC810: Threaded Rod Adapter 140
PWA14: Projector Wall Arm 141
EX Models: Ceiling/Wall Extension Kit 140

PRS Projector Mount

For Projectors up to 25 lb

- Spider® universal adapter plate fits most projectors
- Cable management via access opening allows cables to be routed through projector mount out of sight
- Leg extends from 7.1" to 16.55" to fit most projector models
- Dedicated adapter plates available for specific projector models
- Available clamp-style adapter plates have adjustable height and width to fit most projectors
- Standard and security fasteners included for image alignment
- 3 axes of adjustment enable precise image alignment
- Quick-release for easy projector removal and maintenance
- Low-profile design allows projector to be close to ceiling

* Includes theft resistant hardware for attaching projector to mount
** Dedicated adapter plates come in black, silver or white and include security fasteners

Requires projector specific adapter to be purchased separately

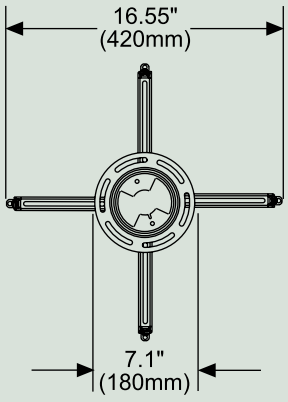

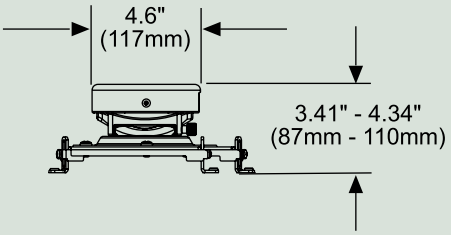

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PJF2 Projector Mount

For Projectors up to 50 lb

- Single point of adjustment for quick image alignment
- Two thumb screws allow fast projector removal for lamp and filter maintenance
- Cords routed internally through extension column
- Spider® universal adapter plate extends from 7.1" to 16.55" to fit most projector models
- Projector-specific adapter plates available
- Clamp-style adapter plates have adjustable height and width to fit most projectors

* Includes theft resistant hardware for attaching projector to mount
** Dedicated adapter plates available in black or silver and include security fasteners.

⚠ Requires projector specific adapter to be purchased separately

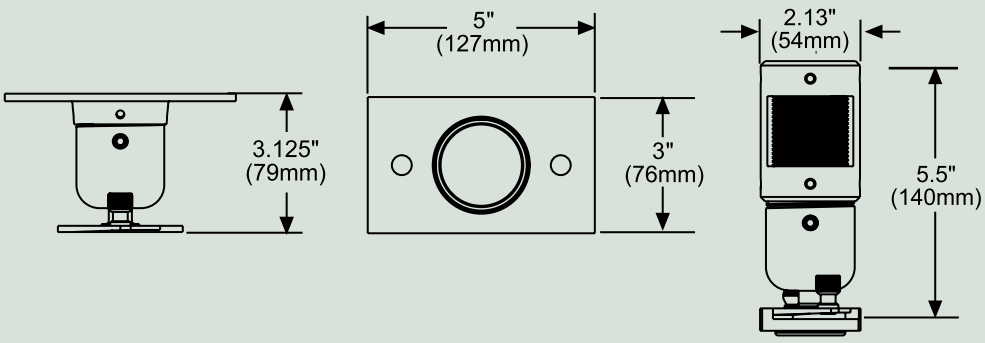

MODELS

Universal Models
Security Fasteners*

PJF2-UNV	Black
PJF2-UNV-S	Silver

Dedicated Models
Projector Adapter Plate Purchased Separately**

PJF2-1	Black
PJF2-1-S	Silver

Kitted Dedicated Models
Includes Dedicated Projector Adapter Plate**

PJF2-MODELS	Black

PROJECTOR ADAPTER

Universal Models:
Includes universal adapter plate to accommodate projector mounting holes from 7.1" to 16.55"

Dedicated Models:
Requires projector specific adapter plate to be purchased separately

Kitted Dedicated Models:
Includes dedicated projector adapter plate. Use MountFinder™ to verify model.

SPECIFICATIONS

Dimensions:	(W x H x D)
Universal Models:	7.1"-16.55" x 6.71"-7.64" x 7.1"-16.55" (18-42 x 17-19.4 x 18-42 cm)
Dedicated Models:	5" x 3.12" x 3" (12.7 x 7.9 x 7.6 cm)
Tilt:	±15°
Swivel:	360°
Roll:	±15°
Max Load:	50 lb (22.7 kg)
Ship Weight:	
Universal Models:	3.4 lb (1.5 kg)
Dedicated Models:	1.3 lb (.58 kg)
Mounting Surfaces:	Wood joist, concrete and other structures *(Other structures require accessory)*

Quickship Item ®

c UL us

ACCESSORIES pg#

ACC, CMJ Models: Ceiling Plates 137-139
ADJ, EXT Models: Extension Columns 139
PWA14: Projector Wall Arm 141

Projector

PARAMOUNT™ by Peerless

Flush Ceiling Projector Mount

For Projectors up to 50 lb

- Provides full range of image adjustment:
  Tilt: +30/-5°
  Roll: ±20°
  Swivel: ±20°
- Low-profile design for flush mount installations
- Spider® universal adapter plate extends from 7.1" to 16.55" to fit most projector models

MODELS

Universal Models
Security Fasteners*

PPF	Black
PPF-S	Silver
PPF-W	White

PROJECTOR ADAPTER

Universal Models:
Includes Spider® universal adapter plate to accommodate projector mounting holes from 7.1" to 16.5"

SPECIFICATIONS

Dimensions:	(W x H x D) 7.1"-16.55" x 5.6" x 7.1"-16.55" (18-42 x 14.2 x 18-42 cm)
Tilt:	+30/-5°
Swivel:	±20°
Roll:	±20°
Max Load:	50 lb (22.6 kg)
Ship Weight:	4.8 lb (2.1 kg)
Mounting Surfaces:	Wood joist, and concrete ceiling

* Includes theft resistant hardware for attaching projector to mount

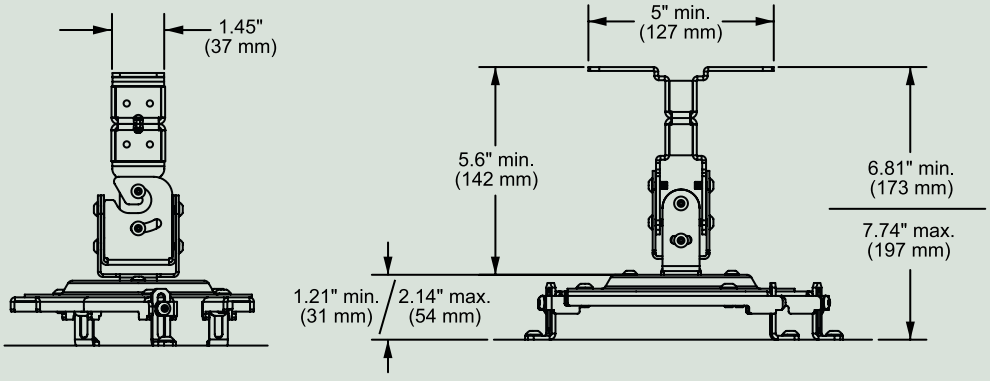

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PRS Series Adjustable Extension Projector Mount Kit

For Projectors up to 25 lb

- Includes ceiling plate for wood or concrete ceiling
- Comes in three adjustable height ranges in 1" increments: 9.66"–12.66", 15.66"–21.66" and 21.66"–27.66"
- Uses 1-1/2 x 11.5 NPT extension column
- Easy cable management via access opening
- Spider® universal adapter plate extends from 7.1" to 16.55" to fit most projector models
- 3 axes of adjustment enable precise image alignment
- Quick-release for easy projector removal and maintenance

* Includes theft resistant hardware for attaching projector to mount

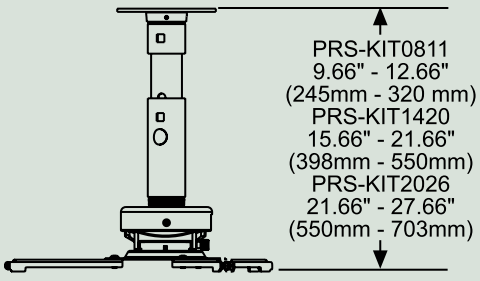



MODELS

Universal Models
Security Fasteners*

PRS-KIT0811	Black
PRS-KIT1420	Black
PRS-KIT2026	Black

PROJECTOR ADAPTER

Universal Models:
Includes universal adapter plate to accommodate projector mounting holes from 7.1" to 16.5"

SPECIFICATIONS

Dimensions: (W x D)
7.1"-16.55" x 7.1"-16.55"
(18-42 x 18-42 cm)

Height:
PRS-KIT0811: 9.66"-12.66" (24.5-32 cm)
PRS-KIT1420: 15.66"-21.66" (39.8-55 cm)
PRS-KIT2026: 21.66"-27.66" (55-70.3 cm)

Tilt: +20/-5°
Swivel: 360°
(±30° when flush mounted)
Roll: ±10°

Max Load: 25 lb (11.3 kg)

Ship Weight:
PRS-KIT0811: 8.8 lb (3.9 kg)
PRS-KIT1420: 10 lb (4.5 kg)
PRS-KIT2026: 11.2 lb (5 kg)

Mounting Surfaces: Wood joist, concrete and other structures *(Other structures require accessory)*

c UL us

ACCESSORIES pg#

ACC, CMJ Models: Ceiling Plates 137-139
ADJ, EXT Models: Extension Columns 139
ACC810: Threaded Rod Adapter 140
PWA14: Projector Wall Arm 141

Projector

PRS Series Adjustable Projector Ceiling/Wall Mount Kit

- Continuous channel design for uninterrupted drop length or wall extension adjustments
- Safety catch designed into extension to ensure user and equipment safety
- Internal cable management within channels for clean, clutter-free appearance
- Mounts to ceiling or wall* with included wall mount interface

  ** PRS-EXA and PRS-EXB models only. PRS-EXC is not wall mountable due to its extensive reach*
- Includes PRS Series projector mount for precise image alignment:
  Tilt: +20/-5°
  Swivel: 360°
  Roll: ±10°
- Spider® universal adapter plate extends from 7.1" to 16.55" to fit most projector models

* Includes theft resistant hardware for attaching projector to mount

PRS-EXC models are ceiling mountable only

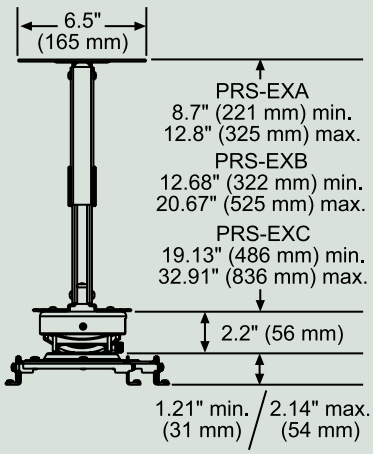

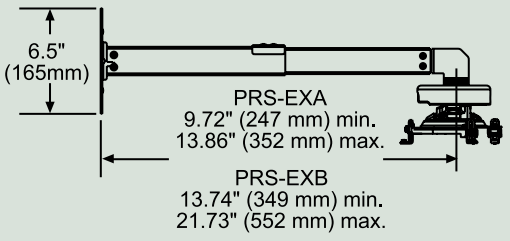

MODELS

Universal Models with 8.7"-12.8" extension
Security Fasteners*

PRS-EXA	Black
PRS-EXA-S	Silver
PRS-EXA-W	White

Universal Models with 12.68"-20.67" extension
Security Fasteners*

PRS-EXB	Black
PRS-EXB-S	Silver
PRS-EXB-W	White

Universal Models with 19.13"-32.91" extension
Security Fasteners*

PRS-EXC	Black
PRS-EXC-S	Silver
PRS-EXC-W	White

PROJECTOR ADAPTER

Universal Models:
Includes Spider® universal adapter plate to accommodate projector mounting holes from 7.1" to 16.5"

SPECIFICATIONS

Dimensions:	(W x D) 6.5"-16.55" x 6.5"-16.55" (16.5-42 x 16.5-42 cm)
Height:	Ceiling Mounted
PRS-EXA(-S)(-W):	8.7"-12.8" (22.1-32.5 cm)
PRS-EXB(-S)(-W):	12.68"-20.67" (32.5-52.5 cm)
PRS-EXC(-S)(-W):	19.13"-32.91" (48.6-83.6 cm)
Height:	Wall Mounted
PRS-EXA(-S)(-W):	9.72"-13.86" (24.7-35.2 cm)
PRS-EXB(-S)(-W):	13.74"-21.73" (34.9-55.2 cm)
Tilt:	+20/-5°
Swivel:	360°
Roll:	±10°
Max Load:	25 lb (11.3 kg)
Ship Weight:	
PRS-EXA(-S)(-W):	6.1 lb (2.7 kg)
PRS-EXB(-S)(-W):	6.7 lb (3 kg)
PRS-EXC(-S)(-W):	7.1 lb (3.2 kg)
Mounting Surfaces:	Wood joist, wood stud or concrete

c UL us

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

PARAMOUNT™ by Peerless

Ceiling/Wall Projector Mount with Adjustable Extension

For Projectors up to 50 lb

- Continuous channel design for uninterrupted drop length or wall extension adjustments
- Safety catch designed into extension to ensure user and equipment safety
- Internal cable management within channels for clean, clutter-free appearance
- Mounts to ceiling or wall* with included wall mount interface

  ** PPA and PPB models only. PPC is not wall mountable due to its extensive reach.*
- Spider® universal adapter plate extends from 7.1" to 16.55" to fit most projector models
- Three independent axes of adjustment for perfect image alignment:
  Tilt: +30/-5°
  Swivel: 360° (±20° at mount)
  Roll: ±20°

* Includes theft resistant hardware for attaching projector to mount

PPC models are ceiling mountable only

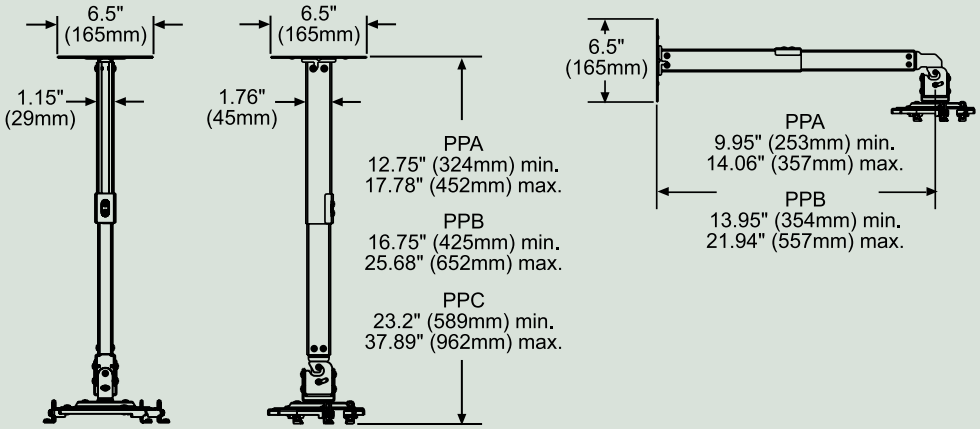

MODELS

Universal Models with 12.75"-17.78" extension
Security Fasteners*

PPA	Black
PPA-S	Silver
PPA-W	White

Universal Models with 16.75"-25.68" extension
Security Fasteners*

PPB	Black
PPB-S	Silver
PPB-W	White

Universal Models with 23.2"-37.89" extension
Security Fasteners*

PPC	Black
PPC-S	Silver
PPC-W	White

PROJECTOR ADAPTER

Universal Models:
Includes universal adapter plate to accommodate projector mounting holes from 7.1" to 16.5"

SPECIFICATIONS

Dimensions: (W x D)
6.5"-16.55" x 6.5"-16.55"
(16.5-42 x 16.5-42 cm)

Height: Ceiling Mounted
PPA(-S)(-W): 12.75"-17.78" (32.4-45.2 cm)
PPB(-S)(-W): 16.75"-25.68" (42.5-65.2 cm)
PPC(-S)(-W): 23.2"-37.89" (58.9-96.2 cm)

Height: Wall Mounted
PPA(-S)(-W): 9.95"-14.06" (25.3-35.7 cm)
PPB(-S)(-W): 13.95"-21.94" (35.4-55.7 cm)

Tilt: +30/-5°
Swivel: ±360° (±20° at mount)
Roll: ±20°

Max Load: 50 lb (22.6 kg)

Ship Weight:
PPA(-S)(-W): 6.4 lb (2.9 kg)
PPB(-S)(-W): 6.8 lb (3 kg)
PPC(-S)(-W): 7.7 lb (3.4 kg)

Mounting Surfaces: Wood joist, wood stud and concrete

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

Projector

MODELS

Universal Models
Security Fasteners*

PSM-UNV	Black
PSM-UNV-S	Silver
PSM-UNV-W	White

PROJECTOR ADAPTER

Universal Models:
Universal tray pattern accommodates most projectors

SPECIFICATIONS

Dimensions:	(W x H x D) 14.25" x 4.67" x 12.82" (36.2 x 11.9 x 32.6 cm)
Tilt:	±15°
Swivel:	360°
Roll:	±15°
Max Load:	50 lb (22.6 kg)
Ship Weight:	10.4 lb (4.7 kg)
Mounting Surfaces:	Wood joist, concrete and other structures *(Other structures requires accessory)*

c UL us

ACCESSORIES pg#

ACC, CMJ Models: Ceiling Plates 137-139
ADJ, EXT Models: Extension Columns 139
PWA14: Projector Wall Arm 141

PSM Security Mount

For Projectors up to 50 lb

- ±15° tilt, ±15° roll and 360° swivel
- Key-lock security for theft deterrence
- Two-piece tray design prevents access to security fasteners
- Easy-access hinge design for quick projector removal, enabling lamp and filter maintenance
- Top access hole for cable management
- Security fasteners included

* Includes theft resistant hardware for attaching projector to mount

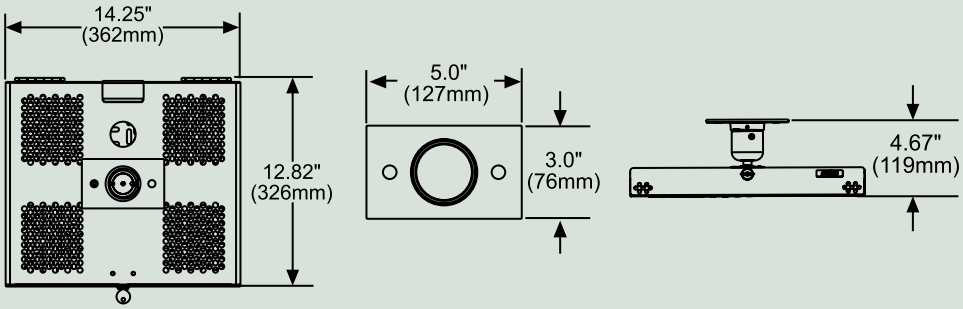

peerless® MOUNTS

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

PSMU Security Mount

For Projectors up to 25 lb

- +20°/–5° tilt , ±10° roll and 360° swivel
- Key-lock security for theft deterrence
- Two-piece tray design prevents access to security fasteners
- Easy-access hinge design for quick projector removal, enabling lamp and filter maintenance
- Access hole for wire management
- Security fasteners included

* Includes theft resistant hardware for attaching projector to mount

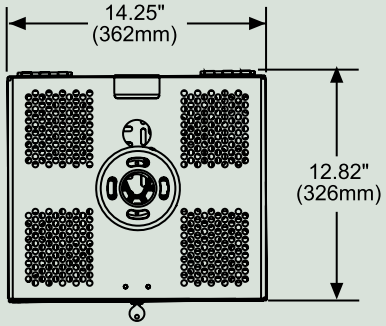

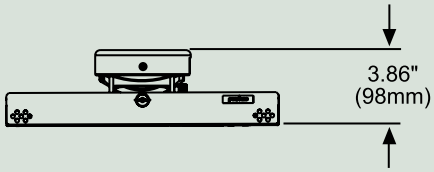

MODELS

Universal Models
Security Fasteners*

PSMU-PRS	Black
PSMU-PRS-S	Silver
PSMU-PRS-W	White

PROJECTOR ADAPTER

Universal Models:
Universal tray pattern accommodates most projectors

SPECIFICATIONS

Dimensions:	(W x H x D) 14.25" x 3.86" x 12.82" (36.2 x 9.8 x 32.6 cm)
Tilt:	+20/-5°
Swivel:	360°
Roll:	±10°
Max Load:	25 lb (11.3 kg)
Ship Weight:	11.5 lb (5.2 kg)
Mounting Surfaces:	Wood joist, concrete and other structures *(Other structures require accessory)*

c UL us

ACCESSORIES pg#

ACC, CMJ Models: Ceiling Plates 137-139
ADJ, EXT Models: Extension Columns 139
ACC810: Threaded Rod Adapter 140
PWA14: Projector Wall Arm 141

Projector

MODELS

Universal Models
Security Fasteners*

PE1120	Black
PE1120-W	White

SPECIFICATIONS

Dimensions: (W x H x D)
22.41" x 12.57" x 20.53"
(56.9 x 31.9 x 52.1 cm)

Ship Weight: 43.5 lb (19.8 kg)

Mounting Surfaces: Attaches to 1"–1.5" NPT pipe or can be attached directly to structural or suspended ceiling
(Suspended ceiling requires accessory)

ACCESSORIES pg#

PRG, PRS, PJF2 Models:
Projector Mount 85, 86, 87
ADJ, EXT Models: Extension Columns 139

Projector Enclosure

For use with Projector Mounts

- Secures and protects virtually any projector and mount
- Retro-fit capable without tampering with existing installations
- Simple three-step installation
- Adjustable bars accommodate projector lens placement
- Pipe clamp accommodates 1" NPT to 1.5" NPT pipe
- "Hook-n-Hang" feature allows hands-free operation during projector installation or maintenance
- Patented security fasteners and security wrench only offered by Peerless
- Can also be flush mounted to position projector close to ceiling
- Projector mount purchased separately

* Includes theft resistant hardware for attaching projector to mount

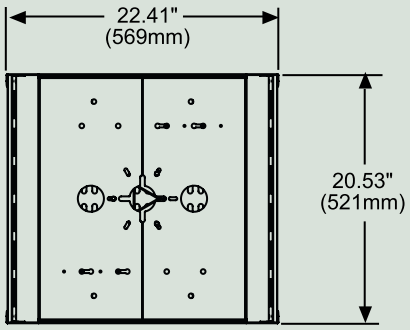

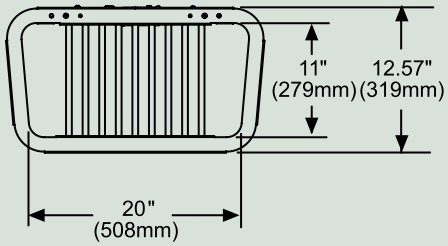

peerless® MOUNTS

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Jumbo® Wide Body Carts

For Projectors, TV's up to 32" and A/V Equipment

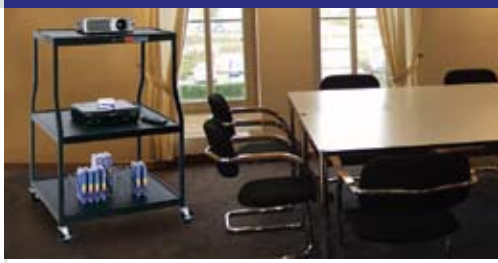

- Pyramid tip-resistant design
- Multi-purpose cart for projectors, TVs or A/V equipment
- A cable access hole in top and middle shelves for cable management
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- Swivel casters include locking brake for stability
- JCTWB44E includes 3-outlet electric strip & cord wrap bracket

MODELS

JCTWB44	Black
JCTWB44E	Black

SPECIFICATIONS

Overall Dimensions: (W x H x D)
32" x 44" x 27"
(81.2 x 111.7 x 68.5 cm)

Max Load: 300 lb (136 kg)

Ship Weight:
JCTWB44: 62 lb (28.1 kg)
JCTWB44E: 64.3 lb (29.1 kg)

ACCESSORIES

pg#

ACC652: Electrical outlet strip with cord wrap 143
ACC666: Safety Belt 144

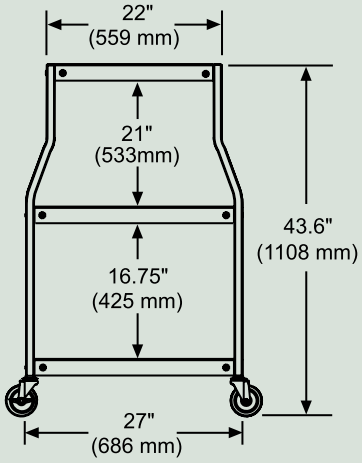

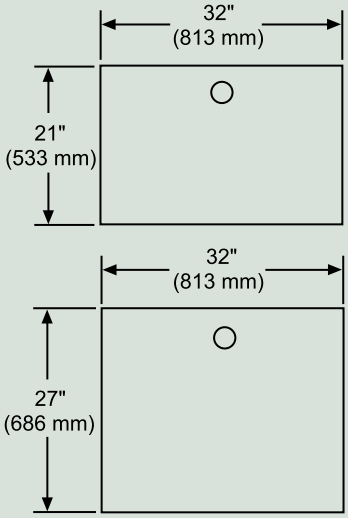

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

Projector

MODELS

JCT-2642E Black

SPECIFICATIONS

Overall Dimensions: (W x H x D)
24" x 26"-42" x 18"
(61 x 66-106.7 x 45.7 cm)

Max Load: 200 lb (90.7 kg)

Ship Weight:
JCT-2642E: 44 lb (19.9 kg)

ACCESSORIES pg#

ACC652: Three Outlet Electric Strip 143
ACC666: Safety Belt 144

Jumbo® Height Adjustable Cart

For Projectors, TV's up to 20" and A/V Equipment

- Adjustable height—from 26"–42" in 2" increments
- Multi-purpose cart for projectors, TVs or A/V equipment
- Non-slip rubber mat keeps equipment from sliding
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- UL -approved 3-outlet electric strip with 15-ft line cord and cord wrap bracket
- Swivel casters include locking brake for stability

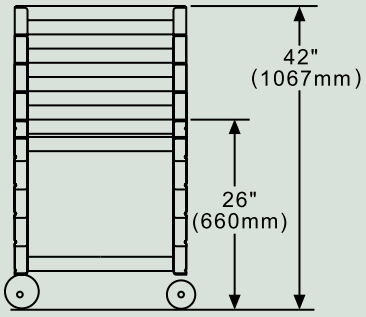



To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at
www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Adjustable Height Multi-Purpose Cart

For Projectors, TV's up to 20" and A/V Equipment

- Adjustable heights—at 16", 26", 34" and 42" H
- Multi-purpose cart for projectors, TVs or A/V equipment
- Injection molded thermal plastic construction, will not warp, rust or crack
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- UL-approved 3-outlet electric strip with 15 ft line cord and cord wrap bracket
- Swivel casters include locking brake for stability

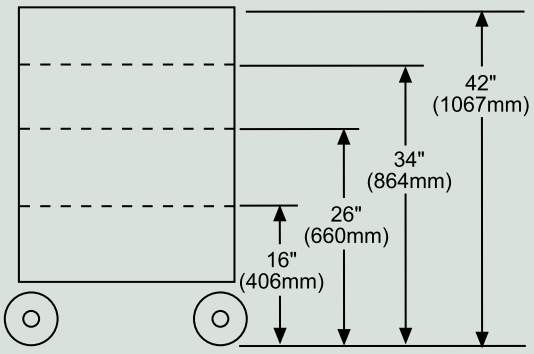



MODELS

JCT-P1642E Black

SPECIFICATIONS

Overall Dimensions:	(W x H x D) 24" x 26"-42" x 18" (61 x 66-106.7 x 45.7 cm)
Max Load:	200 lb (90.7 kg)
Ship Weight:	30 lb (13.6 kg)

ACCESSORIES

pg#

ACC666: Safety Belt 144

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

Projector

MODELS

JCT-P2642CE Black

SPECIFICATIONS

Overall Dimensions: (W x H x D) 24" x 26"-42" x 18" (61 x 66-106.7 x 45.7 cm)

Max Load: 200 lb (90.7 kg)

Ship Weight: 49 lb (22.2 kg)

ACCESSORIES

pg#

ACC666: Safety Belt 144

Adjustable Height Video Cart

For Projectors, TV's up to 20" and A/V Equipment

- Adjustable heights—at 26", 34" or 42"
- Multi-purpose cart for projectors, TVs or A/V equipment
- Injection molded thermal plastic construction, will not warp, rust or crack
- Includes locking storage cabinet with keys
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- UL-approved 3-outlet electric strip with 15 ft line cord and cord wrap bracket
- Shelves and legs constructed from recyclable material
- Swivel casters include locking brake for stability

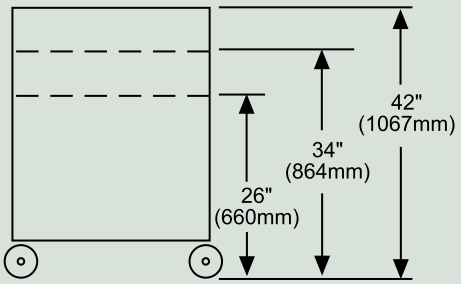

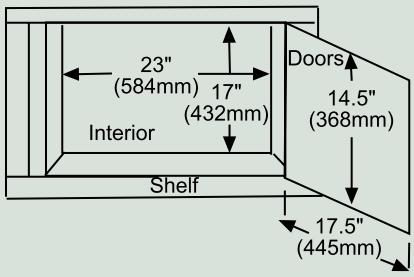

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

peerless® MOUNTS

Adjustable Height Video Carts

For Projectors, TV's up to 32" and A/V Equipment

- Adjustable heights—at 28", 44", 48" or 54" H
- Multi-purpose cart for projectors, TVs or A/V equipment
- Injection molded thermal plastic construction, will not warp, rust or crack
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces.
- Includes locking storage cabinet with keys (JCT-P2854CE only)
- UL-approved 3-outlet electric strip with 15 ft line cord and cord wrap bracket
- Shelves and legs constructed from recyclable material
- Swivel casters include locking brake for stability
- Weight load 100 lb per shelf

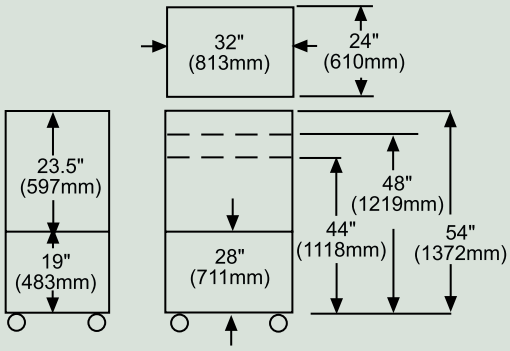

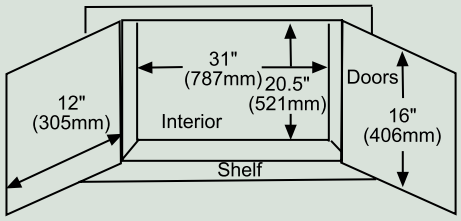

MODELS

JCT-P2854E	Black
JCT-P2854CE	Black

SPECIFICATIONS

Overall Dimensions: (W x H x D) 32" x 28"-54" x 24" (81.3 x 71.1-137.2 x 61 cm)

Max Load: 300 lb (136 kg)

Ship Weight:
JCT-P2854E: 72 lb (32.7 kg)
JCT-P2854CE: 100 lb (45.4 kg)

ACCESSORIES

pg#

ACC666: Safety Belt 144

To verify mount compatibility with any LCD, plasma, or projector model use MountFinder™ at www.peerlessmounts.com 800.865.2112

CRT mounts

DLP Mounts

- For DLP TVs 42" to 65"
- Tilt and swivel adjustment for perfect viewing angle
- Front and rear roll-out protection secures TV

Wall Mounts

- Fits 9" to 42" CRT TVs
- Tray or yoke-style bracket options
- Adjustable tilt and swivel for perfect viewing angle

Ceiling Mounts

- Fits 13" to 42" CRT TVs
- Adjustable tilt and swivel for perfect viewing angle
- Installs in 2 parts for easy, one person installation

Desktop

- Universal models fit 9" to 32" CRT TVs
- 360° swivel with restriction at 30°, 60°, and 90°
- Security screws lock TV to tray to deter theft

Carts

- For CRT TVs up to 40" and A/V equipment
- Easy maneuverability across various flooring surfaces and through doorways
- Large shelves to hold various types of A/V Equipment

Jumbo® DLP Wall Mounts

For most 42" to 65" Rear Projection DLP TVs

- Mounting bracket adjusts in height and width to accommodate most DLP screen models
- Adjustable tilt up to 30°
- Front and rear roll out protection
- Mounts to single wood stud
- Wall arm depth 22.5"
- Security fasteners available
- JMW-DLP-50(S) fits TV's 42"-50" wide, 12"-18.5" deep
- JMW-DLP-60(S) fits TV's 52"-60" wide, 12"-18.5" deep

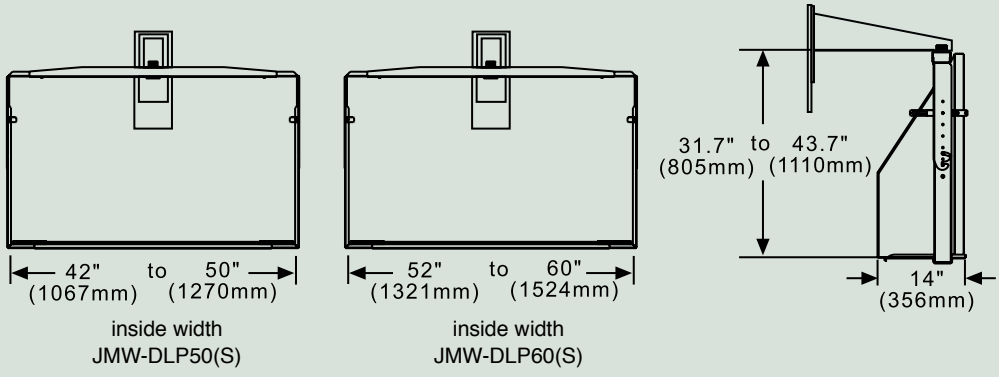

MODELS

JMW-DLP50	Black
JMW-DLP50S	Silver
JMW-DLP60	Black
JMW-DLP60S	Silver

SPECIFICATIONS

Dimensions:	(W x H x D)
JMW-DLP50(S)	43.5"-51.5" x 34.7"-46.7" x 14" (110.5-130.8 x 88.1-118.6 x 23.8 cm)
JMW-DLP60(S)	53.5"-61.5" x 34.7"-46.7" x 14" (135.8-156.2 x 88.1-118.6 x 23.8 cm)
Tilt:	30°
Swivel:	360°
Max Load:	125 lb (56.6 kg)
Ship Weight:	
JMW-DLP50(S)	62.1 lb (28 kg)
JMW-DLP60(S)	75.5 lb (34 kg)
Mounting Surfaces:	Wood stud, concrete *(Concrete accessory required)*

ACCESSORIES

pg#

ACC204: Alligator® Concrete Anchors.....142
ACC502: Security Fasteners.....145

MODELS

JMC-DLP50	Black
JMC-DLP50S	Silver
JMC-DLP60	Black
JMC-DLP60S	Silver

SPECIFICATIONS

Dimensions:	(W x H x D)
JMC-DLP50(S)	43.5"-51.5" x 34.7"-46.7" x 14" (110.5-130.8 x 88.1-118.6 x 23.8 cm)
JMC-DLP60(S)	53.5"-61.5" x 34.7"-46.7" x 14" (135.8-156.2 x 88.1-118.6 x 23.8 cm)
Tilt:	30°
Swivel:	360°
Max Load:	125 lb (56.6 kg)
Ship Weight:	
JMC-DLP50(S)	46.3 lb (21 kg)
JMC-DLP60(S)	59.5 lb (27 kg)
Mounting Surfaces:	Wood joist, concrete *(Concrete accessory required)*

ACCESSORIES pg#

CMJ Models: Ceiling Plates 137
ADJ, EXT Models: Extension Columns 139
ACC204: Alligator® Concrete Anchors 142
ACC502: Security Fasteners 145

Jumbo® DLP Ceiling Mounts

For most 42" to 65" Rear Projection DLP TVs

- Mounting bracket adjusts in height and width to accommodate most DLP screen models
- Various drop lengths using optional extension columns
- Adjustable tilt up to 30°
- Front and rear roll out protection
- Flush mounts to structural ceiling on 16" centers
- JMC-DLP-50(S) fits TV's 42"-50" wide, 12"-18.5" deep
- JMC-DLP-60(S) fits TV's 52"-60" wide, 12"-18.5" deep



inside width
JMC-DLP50(S)



inside width
JMC-DLP60(S)



Classic Series™ Wall Mounts

For 9" to 13" CRT TVs

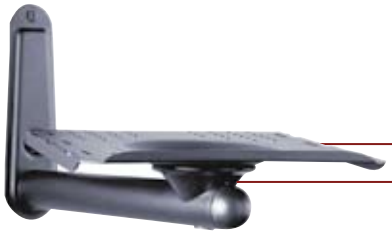

- Choice of three tray positions—0° or fixed forward tilt at 5° or 10°
- Adjustable swivel
- Safety strap for securing TV set to mounting tray
- Ideal for mounting CCTV monitors

MODEL	Color	TV Screen	Tray Width	Tray Depth	Reach*	Tilt	Max. Load	Ship Weight
CS9	Black	9"	10" (25.4 cm)	10" (25.4 cm)	14" (35.6 cm)	0°/5°/10°	50 lb (22.7 kg)	5 lb (2.3 kg)
CS13	Black	13"	14" (35.6 cm)	10" (25.4 cm)	17.75" (45.1 cm)	0°/5°/10°	50 lb (22.7 kg)	7 lb (3.2 kg)

* *From wall to front edge of tray*

MODELS

CS9	Black
CS13	Black

SPECIFICATIONS

Dimensions: See chart

Tilt: 0°, 5° and 10°

Max Load: 50 lb (22.7 kg)
Wood stud and concrete
35 lb (15.9 kg)
Metal stud with togglers
125 lb (57 kg)
Metal stud with wall plate

Ship Weight: See chart

Mounting Surfaces: Wood stud, concrete and metal stud *(Concrete and metal stud accessory required)*

c UL us

ACCESSORIES pg#

DS Models: DVD/VCR Mounts 128
WSP Models: Metal Stud Wall Plates 142
ACC215: Metal Stud Fastener Kit 142
ACC203: Alligator® Concrete Anchors .. 142

MODELS

DS MODELS Black or silver (see chart)

SPECIFICATIONS

DIMENSIONS: See chart

TILT: 0°, 5° and 10°
SWIVEL: 120°

MAX LOAD: See chart

SHIP WEIGHT: See chart

MOUNTING SURFACES: Wood stud, concrete and metal stud *(Concrete and metal stud accessory required)*

c UL us

ACCESSORIES pg#

DS Models: DVD/VCR Mounts.....128
WSP Models: Metal Stud Wall Plate 142
ACC203: Alligator® Concrete Anchors..142

Designer Series™ Wall Mounts

For 13" to 32" CRT TVs

- Low-profile patented design
- 120° side-to-side adjustable swivel
- Two pivot points provide 120° swivel for viewing flexibility
- Choice of three tray positions—0° or fixed forward tilt at 5° or 10°
- Multiple perforated hole patterns for attachment of TV to mount
- Safety strap included to secure TV to mounting tray

MODEL	Color	TV Screen	Tray Width	Tray Depth	Reach*	Ship Weight	Max. Load	
							Metal stud with wall plate**	Wood stud and Concrete
DS13	Black	13"–14"	14" *(35.6 cm)*	10" *(25.4 cm)*	20.5" *(52.1 cm)*	7.8 lb *(3.5 kg)*	125 lb *(57 kg)*	110 lb *(49.9 kg)*
DS13-SV	Silver	13"–14"	14" *(35.6 cm)*	10" *(25.4 cm)*	20.5" *(52.1 cm)*	7.8 lb *(3.5 kg)*	125 lb *(57 kg)*	110 lb *(49.9 kg)*
DS20	Black	19"–20"	20" *(50.8 cm)*	10" *(25.4 cm)*	23" *(58.4 cm)*	10 lb *(4.5 kg)*	125 lb *(57 kg)*	110 lb *(49.9 kg)*
DS20-SV	Silver	19"–20"	20" *(50.8 cm)*	10" *(25.4 cm)*	23" *(58.4 cm)*	10 lb *(4.5 kg)*	125 lb *(57 kg)*	110 lb *(49.9 kg)*
DS27	Black	25"–27"	25" *(63.5 cm)*	10" *(25.4 cm)*	25" *(53.5 cm)*	13 lb *(5.9 kg)*	125 lb *(57 kg)*	125 lb *(56.7 kg)*
DS27-SV	Silver	25"–27"	25" *(63.5 cm)*	10" *(25.4 cm)*	25" *(53.5 cm)*	13 lb *(5.9 kg)*	125 lb *(57 kg)*	125 lb *(56.7 kg)*
DS32	Black	30"–32"	31" *(78.7cm)*	16" *(40.6 cm)*	25" *(53.5 cm)*	24 lb *(10.9 kg)*	125 lb *(57 kg)*	160 lb *(72.6 kg)*
DS32-SV	Silver	30"–32"	31" *(78.7cm)*	16" *(40.6 cm)*	25" *(53.5 cm)*	24 lb *(10.9 kg)*	125 lb *(57 kg)*	160 lb *(72.6 kg)*

* *From wall to front edge of tray*
** *Requires accessory*

Slimline® Wall Mounts

For 9" to 27" CRT TVs

- Low-profile tray style wall mount
- Adjustable swivel
- Multiple perforated hole patterns for attachment of TV to tray
- Adjustable, fixed tilt or flat models
- DVD/VCR mounts may be added to LWB and WB models after monitor installed

LWB

WB

SWM

MODEL	TV Screen	Tray Width	Tray Depth	Reach*	Tilt	Security	Ship Weight
LWB530T**	19"–20"	22" *(55.9 cm)*	13" *(33 cm)*	20.5" *(52.1 cm)*	10°	Yes	21 lb *(9.5 kg)*
LWB375T***	25"–27"	24.25" *(61.5 cm)*	15" *(38.1 cm)*	25" *(53.5 cm)*	10°	Yes	28 lb *(12.7 kg)*
LWB375TCB***	25"–27"	24.25" *(61.5 cm)*	15" *(38.1 cm)*	25" *(53.5 cm)*	10°	Yes	29 lb *(13.2 kg)*
SWM310****	9"–13"	10.5" *(26.7 cm)*	11.5" *(29.2 cm)*	14.5" *(36.8 cm)*	0°/5°/10°	Yes	9 lb *(4.1 kg)*
SWM314****	13"–16"	13" *(33 cm)*	12.5" *(31.8 cm)*	18.25" *(46.5 cm)*	0°/5°/10°	Yes	11 lb *(5 kg)*
WB20T**	19"–20"	20" *(50.8 cm)*	10" *(25.4 cm)*	19.75" *50.2 cm)*	10°	No	16 lb *(7.3 kg)*
WB27T ***	25"–27"	25" *(63.5 cm)*	10" *(25.4 cm)*	23" *(58.4 cm)*	10°	No	20.9 lb *(9.5kg)*

* *From wall to front edge of tray*
** *Rectangular wall arm*
*** *Tapered wall arm*
**** *Tubular wall arm*

MODELS

LWB MODELS	Black
SWM MODELS	Black
WB MODELS	Black

SPECIFICATIONS

DIMENSIONS: See chart

MAX LOAD:

Mounts for 9"-13": (SWM310)
50 lb (22.7 kg) Wood stud and concrete
35 lb (15.9 kg) Metal stud with togglers
125 lb (57 kg) Metal stud with wall plate

Mounts for 13"-20": (SWM314 and WB20T)
100 lb (45 kg) Wood stud and concrete
35 lb (15.9 kg) Metal stud with togglers
125 lb (57 kg) Metal stud with wall plate

Mounts for 25"-27": (LWB375T, 375TCB and WB27T)
125 lb (57 kg) Wood stud and concrete
125 lb (57 kg) Metal stud with togglers

SHIP WEIGHT: See chart

MOUNTING SURFACES: Wood stud, concrete and metal stud *(Concrete and metal stud accessory required)*

c UL us

ACCESSORIES pg#

Slimline Models: DVD/VCR Mounts 128
WSP Models: Metal Stud Wall Plate 142
ACC215: Metal Stud Fastener Kit 142
ACC204: Alligator® Concrete Anchors .. 142
ACC666: Safety Belt 144

MODELS

JMW Models Black or silver (see chart)

SPECIFICATIONS

Dimensions: See chart

Tilt: 30°

Swivel: 360°

Max Load:

Wood Stud

Single Wall Arm: 125 lb (56.7 kg)

Double Wall Arm: 300 lb (136.1 kg)

Metal Stud (with WSP Wall Plate)

Single Wall Arm: 125 lb (56.7 kg)

Double Wall Arm: 300 lb (136.1 kg)

Concrete

Single Wall Arm: 150 lb (68 kg)

Double Wall Arm: 300 lb (136.1 kg)

Ship Weight: See chart

Mounting Surfaces: Wood stud, concrete and metal stud *(Concrete and metal stud accessory required)*

c UL us

ACCESSORIES pg#

VPM, SVPM Models: DVD/VCR Mounts 128
WSP Models: Metal Stud Wall Plate 142
ACC016: Oversized Roll-Out Protector 145
ACC204: Alligator® Concrete Anchors 142
ACC666: Safety Belt 144

Jumbo *2000®*

Jumbo 2000® Wall Mounts

For 13" to 42" CRT TVs

- TV completely surrounded; includes top and front roll out protection
- Adjustable tilt up to 30° and 360° swivel
- Single or double wall arm depending on TV size
- Mount may be installed in two sections allowing for one person installation
- DVD/VCR mounts may be added after TV installed
- Models available for wide-aspect ratio TVs

MODEL	TV/Monitor Screen Size*	Support Arm	Width Range	Height Range	Tray Depth	R - Reach**	Ship Weight	Color
JMW2630	13"–17"	Single	13.5"–21" (34–53 cm)	11.4"–17.7" (29–45 cm)	10" (25 cm)	18" (46 cm)	29 lb (13.2 kg)	Black
JMW2630S	13"–17"	Single	13.5"–21" (34–53 cm)	11.4"–17.7" (29–45 cm)	10" (25 cm)	18" (46 cm)	29 lb (13.2 kg)	Silver
JMW2640	19"–21"	Single	18"–26" (46–66 cm)	14.2"–20.4" (36.1–51.8 cm)	10" (25 cm)	18" (46 cm)	30 lb (13.6 kg)	Black
JMW2640S	19"–21"	Single	18"–26" (46–66 cm)	14.2"–20.4" (36.1–51.8 cm)	10" (25 cm)	18" (46 cm)	30 lb (13.6 kg)	Silver
JMW2640D	19"–21"	Single	18"–26" (46–66 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (36 cm)	18" (46 cm)	35 lb (15.9 kg)	Black
JMW2640DS	19"–21"	Single	18"–26" (46–66 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (36 cm)	18" (46 cm)	35 lb (15.9 kg)	Silver
JMW2650	25"–27"	Single	24"–31" (61–79 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25 cm)	22.5" (57 cm)	35 lb (15.9 kg)	Black
JMW2650S	25"–27"	Single	24"–31" (61–79 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25 cm)	22.5" (57 cm)	35 lb (15.9 kg)	Silver
JMW2650D	25"–27"	Single	24"–31" (61–79 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (36 cm)	22.5" (57 cm)	39 lb (17.7 kg)	Black
JMW2650DS	25"–27"	Single	24"–31" (61–79 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (36 cm)	22.5" (57 cm)	39 lb (17.7 kg)	Silver
JMW2650H	25"–27"	Double	24"–31" (61–79 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25 cm)	25" (64 cm)	44 lb (19.9 kg)	Black
JMW2650HS	25"–27"	Double	24"–31" (61–79 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25 cm)	25" (64 cm)	44 lb (19.9 kg)	Silver
JMW2655	25"–27"	Single	24"–31" (61–79 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (36 cm)	22.5" (57 cm)	49 lb (22.3 kg)	Black
JMW2655S	25"–27"	Single	24"–31" (61–79 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (36 cm)	22.5" (57 cm)	49 lb (22.3 kg)	Silver
JMW2660H	30"–36"	Double	29"–36" (74–92 cm)	24.2"–30.4" (61.4–77.2 cm)	14" (36 cm)	25" (64 cm)	55.5 lb (25.2 kg)	Black
JMW2660HS	30"–36"	Double	29"–36" (74–92 cm)	24.2"–30.4" (61.4–77.2 cm)	14" (36 cm)	25" (64 cm)	55.5 lb (25.2 kg)	Silver
JMW2665H	27"–36"	Double	29"-36" (74–91 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (36 cm)	25" (64 cm)	52.5 lb (23.9 kg)	Black
JMW2665HS	27"–36"	Double	29"–36" (74–91 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (36 cm)	25" (64 cm)	52.5 lb (23.9 kg)	Silver
JMW2670H	37"–42"	Double	34"–41.3" (86–105 cm)	29.2"–35.4" (74.2–90 cm)	14" (36 cm)	25" (64 cm)	59.5 lb (27.1 kg)	Black
JMW2670HS	37"–42"	Double	34"–41.3" (86–105 cm)	29.2"–35.4" (74.2–90 cm)	14" (36 cm)	25" (64 cm)	59.5 lb (27.1 kg)	Silver
JMW2675H	35"–42"	Double	34"–41.3" (86–105 cm)	24.2"–30.4" (61.5–77.2 cm)	14" (36 cm)	25" (64 cm)	58 lb (26.4 kg)	Black
JMW2675HS	35"–42"	Double	34"–41.3" (86–105 cm)	24.2"–30.4" (61.5–77.2 cm)	14" (36 cm)	25" (64 cm)	58 lb (26.4 kg)	Silver

** Choose tray based on TV screen size. Measure bottom base of TV to ensure that the base will sit fully on the tray*

*** Distance from wall to center of swivel axis.*

OSHPD Approved Wall Mounts

Jumbo 2000® Wall Mounts

For 13" to 42" CRT TV's

- Adjustable tilt up to 30° and 360° swivel
- Monitor completely surrounded-top and front roll out protections
- Single or double wall arm depending on monitor size

Slimline® Wall Mounts

For 9" to 27" CRT TV's

- Two-piece support tray with key lock
- 360° swivel
- Adjustable tilt up to 30°

MODEL	TV/Monitor Screen Size*	Support Arm	Width Range	Height Range	Tray Depth	Reach**	Ship Weight
OP-JMW2630	13"-17"	Single	13.5"-21" (34-53 cm)	11.4"-17.7" (29-45 cm)	10" (25 cm)	18" (46 cm)	29 lb (13.2 kg)
OP-JMW2640	19"-21"	Single	18"-26" (46-66 cm)	14.2"-20.4" (36.1-51.8 cm)	10" (25 cm)	18" (46 cm)	30 lb (13.6 kg)
OP-JMW2640D	19"-21"	Single	18"-26" (46-66 cm)	14.2"-20.4" (36.1-51.8 cm)	14" (36 cm)	18" (46 cm)	35 lb (15.9 kg)
OP-JMW2650	25"-27"	Single	24"-31" (61-79 cm)	19.2"-25.4" (48.8-64.5 cm)	10" (25 cm)	22.5" (57 cm)	35 lb (15.9 kg)
OP-JMW2650D	25"-27"	Single	24"-31" (61-79 cm)	19.2"-25.4" (48.8-64.5 cm)	14" (36 cm)	22.5" (57 cm)	39 lb (17.7 kg)
OP-JMW2650H	25"-27"	Double	24"-31" (61-79 cm)	19.2"-25.4" (48.8-64.5 cm)	10" (25 cm)	25" (64 cm)	44 lb (19.9 kg)
OP-JMW2655	25"-27"	Single	24"-31" (61-79 cm)	14.2"-20.4" (36.1-51.8 cm)	14" (36 cm)	22.5" (57 cm)	49 lb (22.3 kg)
OP-JMW2660H	30"-36"	Double	29"-36" (74-92 cm)	24.2"-30.4" (61.4-77.2 cm)	14" (36 cm)	25" (64 cm)	55.5 lb (25.2 kg)
OP-JMW2665H	27"-36"	Double	29"-36" (74-91 cm)	19.2"-25.4" (48.8-64.5 cm)	14" (36 cm)	25" (64 cm)	52.5 lb (23.9 kg)
OP-JMW2670H	37"-42"	Double	34"-41.3" (86-105 cm)	29.2"-35.4" (74.2-90 cm)	14" (36 cm)	25" (64 cm)	59.5 lb (27.1 kg)
OP-JMW2675H	35"-42"	Double	34"-41.3" (86-105 cm)	24.2"-30.4" (61.5-77.2 cm)	14" (36 cm)	25" (64 cm)	58 lb (26.4 kg)

* *Be certain to check actual TV dimensions with bracket size.*
** *Distance from wall to center of swivel axis.*

MODEL	TV Screen	Tray Width	Tray Depth	Reach***	Tilt	Security	Ship Weight
OP-LWB530T****	19"-20"	22" (55.9 cm)	13" (33 cm)	20.5" (52.1 cm)	10°	Yes	21 lb (9.5 kg)
OP-LWB375T*****	25"-27"	24.25" (61.5 cm)	15" (38.1 cm)	25" (63.5 cm)	10°	Yes	28 lb (12.7 kg)
OP-WB20T****	19"-20"	20" (50.8 cm)	10" (25.4 cm)	19.75" (50.2 cm)	10°	No	16 lb (7.3 kg)
OP-WB27T *****	25"-27"	25" (63.5 cm)	10" (25.4 cm)	23" (58.4 cm)	10°	No	20.9 lb (9.5kg)

*** *From wall to front edge of tray* **** *Rectangular wall arm* ***** *Tapered wall arm*

MODELS

OP-JMW	Black
OP-LWB	Black
OP-WB	Black

SPECIFICATIONS

Dimensions: See chart

Tilt: 0-30°
Swivel: 360°

Max Load:
Single Wall Arm 96 lb (43.5 kg)
Double Wall Arm 153 lb (69.4 kg)

Ship Weight: See chart

Mounting Surfaces: Wood stud, concrete and metal stud *(Concrete and metal stud accessory required)*

ACCESSORIES pg#

VPM, SVPM: DVD/VCR Mounts 128
WSP models: Metal Stud Wall Plates 142
OP-ACC204: OSHPD Concrete Fasteners 142
OP-ACC307: OSHPD Cinder Block Fasteners 142
ACC016: Oversized Roll-Out Protector 145
ACC666: Safety Belt 144

MODELS

JMC Models Black or silver (see chart)

SPECIFICATIONS

Dimensions: See chart

Tilt: 30°
Swivel: 360°

Max Load: 300 lb (136.1 kg)

Ship Weight: See chart

Mounting Surfaces: Wood joist, concrete or other surfaces *(Concrete and other surfaces require accessory)*

c UL us

ACCESSORIES pg#

VPM, SVPM Models: DVD/VCR Mounts 128
CMJ Models: Ceiling Plates 137
ADJ, EXT Models: Extension Columns 139
ACC016: Oversized Roll-Out Protector 145
ACC204: Alligator® Concrete Anchors 142
ACC666: Safety Belt 144

Jumbo *2000®*

Jumbo 2000® Ceiling Mounts

For 13" to 42" CRT TVs

- Top and front roll out protection
- Adjustable tilt up to 30°
- Full 360° swivel
- Mount may be installed in two sections allowing for one person installation
- DVD/VCR mounts may be added after monitor installed
- Models available for wide-aspect ratio TVs
- Includes ceiling plate for wood joist or concrete ceilings (requires concrete anchors, sold separate)
- Various drop lengths using optional extension columns

MODEL	TV/Monitor Screen Size*	Width Range	Height Range	Tray Depth	Ship Weight	Color
JMC2630	13"–17"	13.5"–21" (34.3–53.3 cm)	11.4"–17.7" (29–45 cm)	10" (25.4 cm)	34 lb (15.5 kg)	Black
JMC2630S	13"–17"	13.5"–21" (34.3–53.3 cm)	11.4"–17.7" (29–45 cm)	10" (25.4 cm)	34 lb (15.5 kg)	Silver
JMC2640	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	10" (25.4 cm)	37 lb (16.8 kg)	Black
JMC2640S	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	10" (25.4 cm)	37 lb (16.8 kg)	Silver
JMC2640D	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	39 lb (17.7 kg)	Black
JMC2640DS	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	39 lb (17.7 kg)	Silver
JMC2650	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25.4 cm)	30 lb (13.6 kg)	Black
JMC2650S	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25.4 cm)	30 lb (13.6 kg)	Silver
JMC2650D	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	34 lb (15.5 kg)	Black
JMC2650DS	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	34 lb (15.5 kg)	Silver
JMC2655	25"–27"	24"–31" (61–78.7 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	41 lb (18.6 kg)	Black
JMC2655S	25"–27"	29"–36" (73.7–91.4 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	41 lb (18.6 kg)	Silver
JMC2660	30"–36"	29"–36" (73.7–91.4 cm)	24.2"–30.4" (61.4–77.2 cm)	14" (35.6 cm)	49 lb (22.3 kg)	Black
JMC2660S	30"–36"	29"–36" (73.7–91.4 cm)	24.2"–30.4" (61.4–77.2 cm)	14" (35.6 cm)	49 lb (22.3 kg)	Silver
JMC2665	27"–36"	29"-36" (73.7–91.4 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	40 lb (18.2 kg)	Black
JMC2665S	27"–36"	29"–36" (73.7–91.4 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	40 lb (18.2 kg)	Silver
JMC2670	37"–42"	34"–41.3" (86.4–105 cm)	29.2"–35.4" (74.2–90 cm)	14" (35.6 cm)	56 lb (25.5 kg)	Black
JMC2670S	37"–42"	34"–41.3" (86.4–105 cm)	29.2"–35.4" (74.2–90 cm)	14" (35.6 cm)	56 lb (25.5 kg)	Silver
JMC2675	37"–42"	34"–41.3" (86.4–105 cm)	24.2"–30.4" (61.5–77.2 cm)	14" (35.6 cm)	54 lb (24.5 kg)	Black
JMC2675S	37"–42"	34"–41.3" (86.4–105 cm)	24.2"–30.4" (61.5–77.2 cm)	14" (35.6 cm)	54 lb (24.5 kg)	Silver

* Be certain to check actual TV dimensions with bracket size.

Jumbo 2000®

Jumbo 2000® Suspended Ceiling Mounts

For 13" to 42" CRT TVs

- Top and front roll out protection
- Adjustable tilt up to 30°
- Full 360° swivel
- Includes turnbuckles for fine adjustment when mounting to main ceiling structure
- Complete support system with metal tray to replace ceiling tile, tile and tie wires
- Mount replaces one ceiling tile with a 24" x 24" steel ceiling plate
- DVD/VCR mounts may be added after monitor installed
- Models available to accommodate wide-aspect ratio TVs
- Various drop lengths using optional extension columns

MODEL	TV/Monitor Screen Size*	Width Range	Height Range	Tray Depth	Ship Weight	Color
JMS2630	13"–17"	13.5"–21" (34.3–53.3	11.4"–17.7" (29–45 cm)	10" (25.4 cm)	44 lb (19.9 kg)	Black
JMS2630S	13"–17"	13.5"–21" (34.3–53.3	11.4"–17.7" (29–45 cm)	10" (25.4 cm)	44 lb (19.9 kg)	Silver
JMS2640	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	10" (25.4 cm)	49.5 lb (22.5 kg)	Black
JMS2640S	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	10" (25.4 cm)	49.5 lb (22.5 kg)	Silver
JMS2640D	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	54.5 lb (24.8 kg)	Black
JMS2640DS	19"–21"	18"–26" (45.7–66 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	54.5 lb (24.8 kg)	Silver
JMS2650	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25.4 cm)	49 lb (22.2 kg)	Black
JMS2650S	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	10" (25.4 cm)	49 lb (22.2 kg)	Silver
JMS2650D	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	53 lb (24.1 kg)	Black
JMS2650DS	25"–27"	24"–31" (61–78.7 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	53 lb (24.1 kg)	Silver
JMS2655	25"–27"	24"–31" (61–78.7 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	55.4 lb (25.2 kg)	Black
JMS2655S	25"–27"	24"–31" (61–78.7 cm)	14.2"–20.4" (36.1–51.8 cm)	14" (35.6 cm)	55.4 lb (25.2 kg)	Silver
JMS2660	30"–36"	29"–36" (73.7–91.4 cm)	24.2"–30.4" (61.4–77.2 cm)	14" (35.6 cm)	61 lb (27.7 kg)	Black
JMS2660S	30"–36"	29"–36" (73.7–91.4 cm)	24.2"–30.4" (61.4–77.2 cm)	14" (35.6 cm)	61 lb (27.7 kg)	Silver
JMS2665	27"–36"	29"–36" (73.7–91.4 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	56 lb (25.5 kg)	Black
JMS2665S	27"–36"	29"–36" (73.7–91.4 cm)	19.2"–25.4" (48.8–64.5 cm)	14" (35.6 cm)	56 lb (25.5 kg)	Silver
JMS2670	37"–42"	34"–41.3" (86.4–105 cm)	29.2"–35.4" (74.2–90 cm)	14" (35.6 cm)	64 lb (29.1 kg)	Black
JMS2670S	37"–42"	34"–41.3" (86.4–105 cm)	29.2"–35.4" (74.2–90 cm)	14" (35.6 cm)	64 lb (29.1 kg)	Silver
JMS2675	35"–42"	34"–41.3" (86.4–105 cm)	24.2"–30.4" (61.5–77.2 cm)	14" (35.6 cm)	62 lb (28.2 kg)	Black
JMS2675S	35"–42"	34"–41.3" (86.4–105 cm)	24.2"–30.4" (61.5–77.2 cm)	14" (35.6 cm)	62 lb (28.2 kg)	Silver

* Be certain to check actual TV dimensions with bracket size.

MODELS

JMS Models Black or silver (see chart)

SPECIFICATIONS

Dimensions: See chart

Tilt: 30°

Swivel: 360°

Max Load: 250 lb (113 kg)

Ship Weight: See chart

Mounting Surfaces: Suspended ceiling

c UL us

ACCESSORIES pg#

VPM, SVPM models: DVD/VCR Mounts.....128
ADJ, EXT models: Extension Columns.....139
ACC016: Oversized Roll-Out Protector 145
ACC666: Safety Belt 144

MODELS

JM Models Black or silver (see chart)

SPECIFICATIONS

Dimensions: See chart

Tilt: 30°
Swivel: 360°

Max Load: Load capacity based on wall or ceiling mount

Ship Weight: See chart

c UL us

ACCESSORIES pg#

VPM, SVPM: DVD/VCR Mounts 128
CMJ models: Ceiling Plates 137
WMJ models: Wall Arm 141
ACC016: Oversized Roll-Out Protector 145
ACC666: Safety Belt 144

Jumbo 2000®

Jumbo 2000® Mount Bracket

For 13" to 42" CRT TVs

- Requires wall arm, suspended ceiling kit or ceiling plate kit
- Top and front roll out protection
- Adjustable up to 30° tilt and 360° swivel
- Low-profile design
- Mount may be installed in two sections allowing for one person installation
- DVD/VCR mounts may be added after monitor installed
- Available pre-assembled. Reduces installation time up to 15 minutes (JM2650PA models)

BRACKET MODEL		Screen Size	Width Range	Height Range	Depth	Ship Weight
JM2630 *Black*	**JM2630S** *Silver*	13"-17"	13.5"-21" *(34.3-53.3 cm)*	11.4"-17.7" *(29-45 cm)*	10" *(25.4 cm)*	22 lb *(9.9 kg)*
JM2640 *Black*	**JM2640S** *Silver*	19"-21"	18"-26" *(45.7-66 cm)*	14.2"-20.4" *(36.1-51.8 cm)*	10" *(25.4 cm)*	24.1 lb *(10.9 kg)*
JM2640D *Black*	**JM2640DS** *Silver*	19"-21"	18"-26" *(45.7-66 cm)*	14.2"-20.4" *(36.1-51.8 cm)*	14" *(35.6 cm)*	27 lb *(12.2 kg)*
JM2650 *Black*	**JM2650S** *Silver*	25"-27"	24"-31" *(61-78.7 cm)*	19.2"-25.4" *(48.8-64.5 cm)*	10" *(25.4 cm)*	26 lb *(11.8 kg)*
JM2650D *Black*	**JM2650DS** *Silver*	25"-27"	24"-31" *(61-78.7 cm)*	19.2"-25.4" *(48.8-64.5 cm)*	14" *(35.6 cm)*	30.6 lb *(13.9 kg)*
JM2655* *Black*	**JM2655S*** *Silver*	25"-27"	24"-31" *(61-78.7 cm)*	14.2"-20.4" *(36.1-51.8 cm)*	14" *(35.6 cm)*	30 lb *(13.6 kg)*
JM2660 *Black*	**JM2660S** *Silver*	30"-36"	29"-36" *(73.7-91.4 cm)*	24.2"-30.4" *(61.4-77.2 cm)*	14" *(35.6 cm)*	39 lb *(17.7 kg)*
JM2665* Black	**JM2665S*** Silver	27"-36"	29"-36" *(73.7-91.4 cm)*	19.2"-25.4" *(48.8-64.5 cm)*	14" *(35.6 cm)*	37 lb *(16.8 kg)*
JM2670 *Black*	**JM2670S** *Silver*	37"-42"	34"-41.25" *(86.4-104.8 cm)*	29.2"-35.4" *(74.2-90 cm)*	14" *(35.6 cm)*	42 lb *(19.1 kg)*
JM2675* *Black*	**JM2675S*** *Silver*	35"-42"	34"-41.25" *(86.4-104.8 cm)*	24.2"-30.4" *(61.5-77.2 cm)*	14" *(35.6 cm)*	41 lb *(18.8 kg)*

* *Note: 150 lb (68 kg) load capacity is for concrete wall installations. Load capacity is reduced to 125 lb (57 kg) if wall arm is attached to wood stud wall.*

* *Models for wide screen aspect ratios. NC - Not Compatible*

MODEL	TV/Monitor Screen Size	Color	Width Range	Height Range	Tray Depth	Ship Weight
JM2650PA	25"-27"	Black	24"-31" *(61-78.7 cm)*	19.2"-25.4" *(48.8-64.5 cm)*	10" *(25.4 cm)*	26 lb *(11.8 kg)*
JM2650PAS	25"-27"	Silver	24"-31" *(61-78.7 cm)*	19.2"-25.4" *(48.8-64.5 cm)*	10" *(25.4 cm)*	26 lb *(11.8 kg)*

Universal Desktop Swivel Mount

For most 19" to 32" CRT TVs

- Designed for convenient viewing from any angle in a room
- Swivel ball bearing base for easy rotation
- Base can be restricted to 30°, 60° or 90° to prevent excessive movement
- Two-piece design for fast, simple installation
- Theft-resistant security fasteners secure TV to mount
- Universal hole pattern fits most TVs
- Cover plate conceals location of security fasteners

MODELS

LDS1920U	Black
LDS1920U-S	Silver
LDS2527U	Black
LDS2527U-S	Silver
LDS32U	Black
LDS32U-S	Silver
LDS375	Black

SPECIFICATIONS

Dimensions: See chart

Swivel: 360°

Max Load:

LDS1920U(-S): 125 lb (56.6 kg)
LDS2527U(-S): 125 lb (56.6 kg)
LDS32U(-S): 150 lb (68 kg)
LDS375: 125 lb (56.6 kg)

Ship Weight:

LDS1920U(-S): 10.6 lb (4.81 kg)
LDS2527U(-S): 11.4 lb (5.1 kg)
LDS32U(-S): 13.7 lb (6.2 kg)
LDS375: 19 lb (8.6 kg)

Mounting Surfaces: Desktop

MODEL	TV Size	Security Hardware	Color	Tray Width	Tray Depth	Product Weight
LDS1920U	19"–20"	Yes	Black	19.5" *(49.5 cm)*	12.8" *(32.7 cm)*	9.8 lb *(4.5kg)*
LDS1920U-S	19"–20"	Yes	Silver	19.5" *(49.5 cm)*	12.8" *(32.7 cm)*	9.8 lb *(4.5kg)*
LDS2527U	25"–27"	Yes	Black	25" *(63.5 cm)*	12.9" *(32.8 cm)*	10.6 lb *(4.8kg)*
LDS2527U-S	25"–27"	Yes	Silver	25" *(63.5 cm)*	12.9" *(32.8 cm)*	10.6 lb *(4.8kg)*
LDS32U	32"	Yes	Black	26" *(66 cm)*	12.9" *(32.8 cm)*	10.6 lb *(4.8kg)*
LDS32U-S	32"	Yes	Silver	26" *(66 cm)*	12.9" *(32.8 cm)*	10.6 lb *(4.8kg)*
LDS375	25" & 27"	Keylock	Black	24" *(61 cm)*	15" *(38.1 cm)*	18 lb *(8.2kg)*

CRT

MODELS

LSS375 Black

SPECIFICATIONS

Dimensions: See chart

Swivel: 360°

Max Load: 125 lb (56.6 kg)

Ship Weight: 25.4 lb (11.5 kg)

Mounting Surfaces: Desktop

Slide-Out Swivel Mount

For most 25" to 27" CRT TVs

- Slide-out mounting rails for use in armoires and cabinets
- Three slide-out restriction options at 3", 6" or 9"
- Two-piece tray with security key lock
- Hole pattern fits most TVs
- Swivels 360° or can be restricted to 30°, 60° or 90°

MODEL	TV Size	Security	Tray Width	Tray Depth	Product Weight
LSS375	25"–27"	Keylock	24" *(61 cm)*	15" *(38.1 cm)*	27.3 lb *(12.4 kg)*

Jumbo® Carts

For up to 40" TVs, Projectors and A/V Equipment

- Pyramid tip-resistant design
- Welded construction
- Hard rubber casters allow for easy movement over dissimilar floor surfaces.
- JCT100 and JCT200 for screens up to 27"
- JCT305 for screens up to 40"
- Swivel casters include locking brake for stability

MODEL	Height	Top Shelf	Middle Shelf	Bottom Shelf	Wheel Type	Max Load	Ship Weight
JCT100	48" *(122 cm)*	35" x 23" *(89 x 58.4 cm)*	37.5" x 25.5" *(95.3 x 65 cm)c*	39" x 27" *(99 x 68.6 cm)*	8" Hard Rubber	125 lb *(56.7 kg)*	117 lb *(53.1 kg)*
JCT200	47" *(119 cm)*	29" x 19" *(74 x 48.3 cm)*	31.5" x 21.5" *(80 x 54.6 cm)*	33" x 23" *(84 x 58.4 cm)*	8" Hard Rubber	125 lb *(56.7 kg)*	85 lb *(38.6 kg)*
JCT305	44" *(111.8 cm)*	39.75" x 27.25" *(101 x 69.2 cm)*	39.75" x 27.25" *(101 x 69.2 cm)*	39.75" x 29" *(101 x 73.7 cm)*	5" Hard Rubber	240 lb *(108.9 kg)*	101 lb *(45.8 kg)*

MODELS

JCT100	Black
JCT200	Black
JCT305	Black

SPECIFICATIONS

Dimensions: (W x H x D)
JCT100: 39" x 48" x 27" (99 x 122 x 68.6 cm)
JCT200: 33" x 47" x 23" (84 x 119 x 58.4 cm)
JCT305: 39.7" x 44" x 31" (100.9 x 111.8 x 78.7 cm)

Max Load:
JCT100: 125 lb (57 kg)
JCT200: 125 lb (57 kg)
JCT305: 240 lb (108.9 kg)

Ship Weight:
JCT100: 117 lb (53.1 kg)
JCT200: 85 lb (38.6 kg)
JCT305: 101 lb (45.8 kg)

ACCESSORIES pg#

ACC552: Electric Outlet Strip with Cord Wrap . 143
ACC666: Safety Belt 144

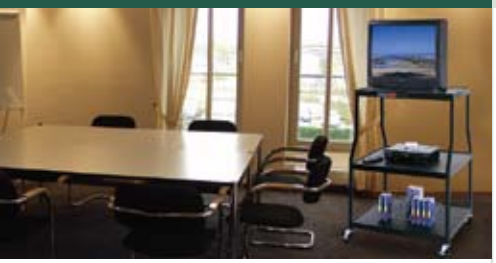

MODELS

JCTWB44	Black
JCTWB44E	Black

SPECIFICATIONS

Overall Dimensions: (W x H x D)
32" x 44" x 27"
(81.2 x 111.7 x 68.5 cm)

Max Load: 300 lb (136 kg)

Ship Weight:
JCTWB44: 62 lb (28.1 kg)
JCTWB44E: 64.3 lb (29.1 kg)

ACCESSORIES

pg#

ACC652: Electrical outlet strip with cord wrap 143
ACC666: Safety Belt 144

Jumbo® Wide Body Carts

For up to 32" Screens, Projectors and A/V Equipment

- Pyramid tip-resistant design
- Multi-purpose cart for projectors, TVs or A/V equipment
- Cable access holes in top and middle shelves for cable management
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- Swivel casters include locking brake for stability
- JCTWB44E includes 3-outlet electric strip & cord wrap bracket

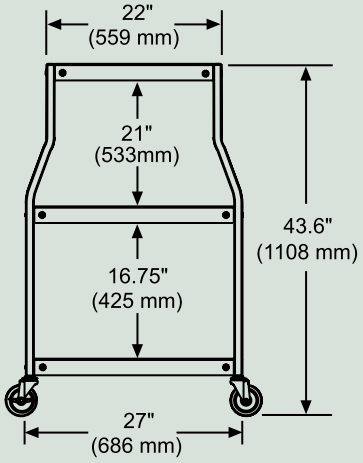

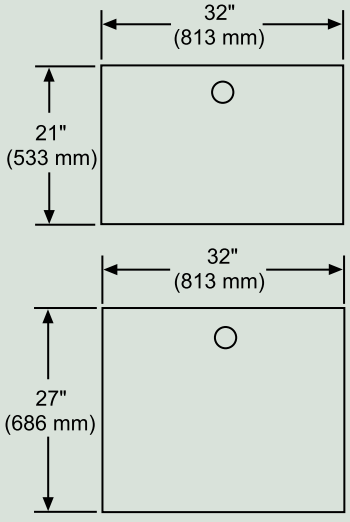

Jumbo® Height Adjustable Cart

- Adjustable heights—from 26"–42" in 2" increments
- Multi-purpose cart for projectors, TVs or A/V equipment
- Non-slip rubber mat keeps equipment from sliding
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- UL-approved 3-outlet electric strip with 15-ft line cord and cord wrap bracket
- Includes 3 outlet electric strip & cord wrap bracket
- Swivel casters include locking brake for stability

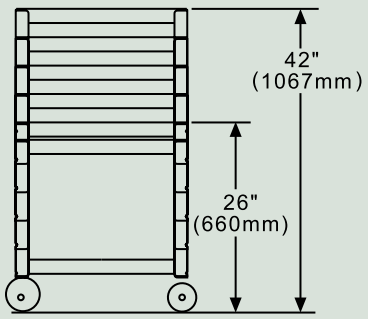



MODELS

JCT-2642E Black

SPECIFICATIONS

Overall Dimensions: (W x H x D) 24" x 26"-42" x 18" (61 x 66-106.7 x 45.7 cm)

Max Load: 200 lb (90.7 kg)

Ship Weight: 44 lb (19.9 kg)

ACCESSORIES pg#

ACC652: Electrical outlet strip with cord wrap 143
ACC666: Safety Belt 144

MODELS

JCT-P1642E Black

SPECIFICATIONS

Overall Dimensions: (W x H x D) 24" x 26"-42" x 18" (61 x 66-106.7 x 45.7 cm)

Max Load: 200 lb (90.7 kg)

Ship Weight: 30 lb (13.6 kg)

ACCESSORIES

pg#

ACC666: Safety Belt 144

Adjustable Height Multi-Purpose Cart

For up to 20" TVs, Projectors and A/V Equipment

- Adjustable heights—at 16", 26", 34" and 42"
- Multi-purpose cart for projectors, TVs or A/V equipment
- Injection molded thermal plastic construction, will not warp or rust or crack
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- UL-approved 3-outlet electric strip with 15 ft line cord and cord wrap bracket
- Swivel casters include locking brake for stability

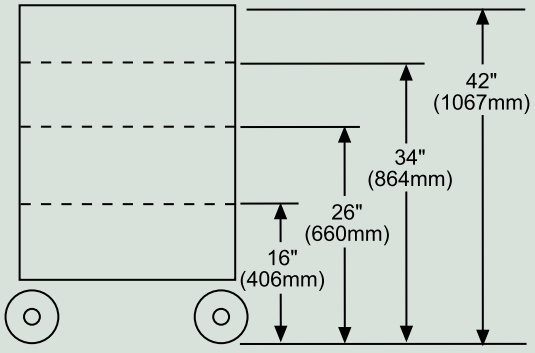



Adjustable Height Video Cart

For up to 20" TVs, Projectors and A/V Equipment

- Adjustable heights at 26", 34" or 42"
- Multi-purpose cart for projectors, TVs or A/V equipment
- Injection molded thermal plastic construction, will not warp, rust or crack
- Includes locking storage cabinet with keys
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces
- UL -approved 3-outlet electric strip with 15 ft line cord and cord wrap bracket
- Shelves and legs constructed from recyclable material
- Swivel casters include locking brake for stability

MODELS

JCT-P2642CE Black

SPECIFICATIONS

Overall Dimensions: (W x H x D) 24" x 26"-42" x 18" (61 x 66-106.7 x 45.7 cm)

Max Load: 200 lb (90.7 kg)

Ship Weight: 49 lb (22.2 kg)

ACCESSORIES pg#

ACC666: Safety Belt.....144

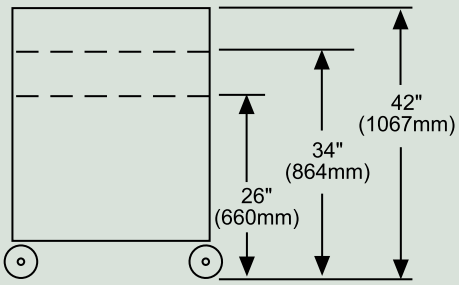

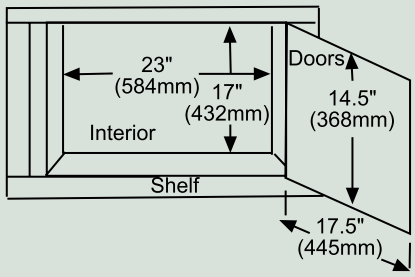

CRT

MODELS

JCT-P2854E	Black
JCT-P2854CE	Black

SPECIFICATIONS

Overall Dimensions: (W x H x D)
32" x 28"-54" x 24"
(81.3 x 71.1-137.2 x 61 cm)

Max Load: 300 lb (136 kg)

Ship Weight:
JCT-P2854E: 72 lb (32.7 kg)
JCT-P2854CE: 100 lb (45.4 kg)

ACCESSORIES pg#

ACC666: Safety Belt.....144

Adjustable Height Video Carts

For up to 32" TVs, Projectors and A/V Equipment

- Adjustable heights at 28", 44", 48" or 54"
- Multi-purpose cart for projectors, TVs or A/V equipment
- Injection molded thermal plastic construction, will not warp, rust or crack
- Hard rubber ball bearing casters allow for easy movement over dissimilar floor surfaces.
- Includes locking storage cabinet with keys (JCT-P2854CE only)
- UL 3-outlet electric strip with 15 ft line cord and cord wrap bracket
- Shelves and legs constructed from recyclable material
- Swivel casters include locking brake for stability
- Weight load 100 lb per shelf

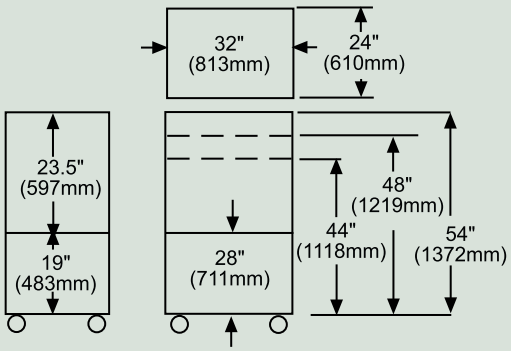

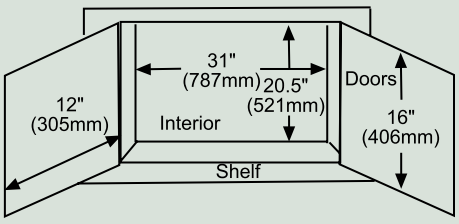

peerless® MOUNTS

A/V Equipment mounts

A/V Component Shelves

- Holds multiple A/V components in a compact format
- Internal cable management hides cords for a clean and clutter-free installation
- Single stud and double stud options available

Cable Management

- Hides cords and cable for a clean installation
- Flexible hinge allows simple snap action closure
- Sits less than 1/2" from the wall

DVD/VCR Accessories

- Attaches to both flat panel and CRT TV mounts
- Protects DVD/VCR from damage
- Security screws provide additional theft deterrence

Speaker Mounts

- Universal models hold speakers up to 75 lb
- Tilt and swivel adjustment for perfect audio alignment
- Wall or ceiling mountable

Camera Mounts

- Fits small and medium security cameras
- Wall or ceiling mountable
- Tilt and swivel adjustment for perfect alignment

Computers & Monitors

- Tilting keyboard tray
- Mountable at both sit down and stand up heights

A/V Equipment

MODELS

Double-Stud Dual Component Shelf System:
SCS222 High gloss black

Double-Stud Component Shelf:
SCS221 High gloss black

SPECIFICATIONS

Dimensions: (W x H x D)
SCS222: 26.2" x 23.39" x 19.19"
(66.5 x 59.4 x 48.7 cm
SCS221: 26.2" x 15.51" x 19.19"
(66.5 x 34.9 x 48.7 cm)

Max Load: 50 lb per shelf (22.6 kg)

Ship Weight:
SCS222: 28 lb (12.7 kg)
SCS221: 16.7 lb (7.5 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

ACCESSORIES pg#

ACC215: Metal Stud Fastener Kit 142
SCS211: Additional Component Shelf.....121

SmartMount®

Component Shelves

For Audio and Video Equipment

- Double-stud shelf spans two wood studs on 16" centers to centralize A/V components under mounted screen
- Modular design enables additional shelves to be added
- Built-in compartment conveniently holds surge protector
- Decorative snap-on covers conceal all mounting hardware and hides excess cables and cords
- Integrated cable management provides clean appearance
- 50 lb capacity per shelf holds virtually all components and accessories

SCS221

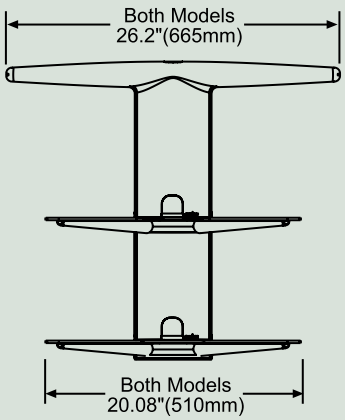

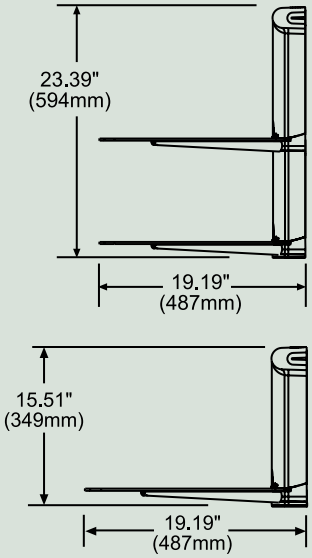

peerless® MOUNTS

SmartMount®

Component Shelves

For Audio and Video Equipment

- Mounts to a single-stud for quick, installation
- Modular design enables additional shelves to be added
- Built-in compartment conveniently holds surge protector
- Decorative snap-on covers conceal all mounting hardware
- Integrated cable management provides clean appearance
- 50 lb capacity per shelf holds virtually all components and accessories

SCS211

MODELS

Dual Component Shelf System:
SCS212 High gloss black

Component Shelf:
SCS211 High gloss black

SPECIFICATIONS

Dimensions: (W x H x D)
SCS212: 20.08" x 20.67" x 19.19"
(51 x 52.5 x 48.7 cm)
SCS211: 20.08" x 11.02" x 19.19"
(51 x 28.0 x 48.7 cm)

Max Load: 50 lb per shelf (22.6 kg)

Ship Weight:
SCS212: 24.9 lb (11.2 kg)
SCS211: 13.6 lb (6.1 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

ACCESSORIES pg#

ACC215: Metal Stud Fastener Kit 142
SCS211: Additional Component Shelf.....121





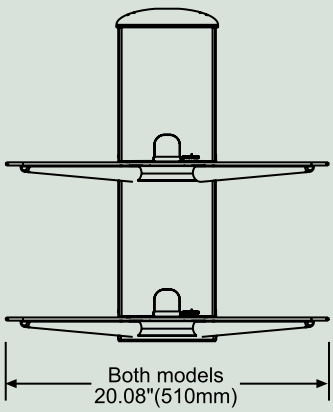

A/V Equipment

MODELS

Models without Glass Shelves:

PM610	Black
PM610S	Silver
PM610W	White

Models with Glass Shelves:

PM610G	Black
PM610SG	Silver
PM610WG	White

SPECIFICATIONS

Dimensions: (W x H x D)
10" x 21" x 17"
(25.4 x 53.3 x 43.2 cm)

Max Load: 20 lb per shelf (9 kg)

Ship Weight:
PM610: 20 lb (9 kg)
PM610G: 52 lb (23.5 kg

Mounting Surfaces: Wood stud, metal stud and concrete
(Metal stud accessory required)

ACCESSORIES pg#

ACC203: Alligator® Concrete Anchors (2 packs required).....142
ACC102: Equipment Support 143

Electronic Tower

For Audio and Video Equipment

- Holds up to 4 electronic components in a compact unit
- Up to 7 equipment support positions at 3" increments
- Cord management ports for clean aesthetics
- Models available with glass shelves

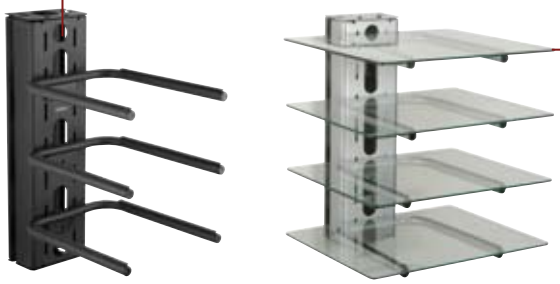

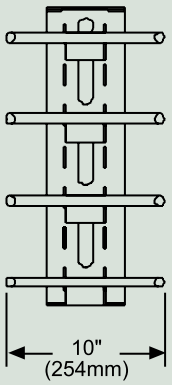

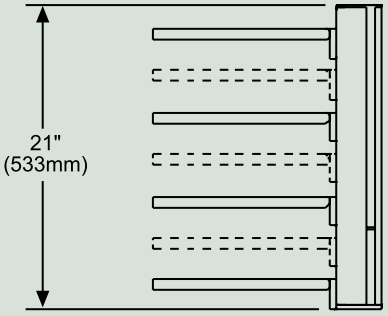

peerless® MOUNTS

PARAMOUNT™ by Peerless

Component Shelf

For Audio and Video Equipment

- Double-stud installation allows A/V equipment to be centered directly underneath flat panel screen
- Adjustable width up to 18" and depth range of 15" to 23" accommodate even the largest receivers and multi-disk DVD players
- Decorative snap-on covers conceal all mounting hardware

- Adjustment knobs allows for easy leveling of components
- Embossed arms with screw holes secure components to shelf
- 100 lb load capacity allows stacking of multiple components, ideal for A/V closets

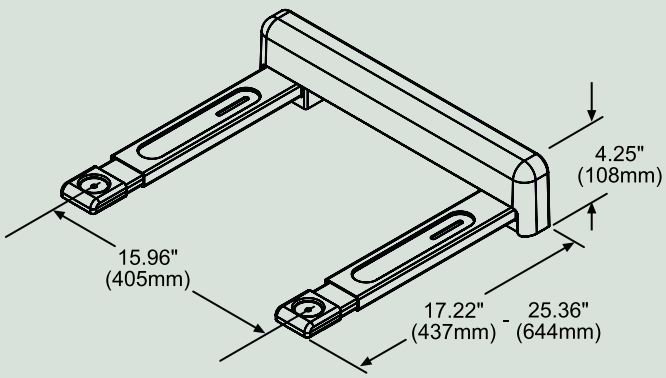

MODELS

Universal Models

PS200 High gloss black

SPECIFICATIONS

Dimensions: (W x H x D)
20.24" x 4.25" x 17.22"- 25.36"
(51.4 x 10.8 x 43.7-64.4 cm)

Max Load: 100 lb (45.3 kg)

Ship Weight: 10.7 lb (4.8 kg)

Mounting Surfaces: Wood stud, concrete, cinder block and metal stud
(Metal stud accessory required)

ACCESSORIES pg#

ACC215: Metal Stud Fastener Kit 142

A/V Equipment

MODELS

PM600	Black
PM600W	White

SPECIFICATIONS

Dimensions: (W x H x D)
20" x 8.25" x 14.5"-19.5"
(50.8 x 21 x 36.8-49.5 cm)

Max Load: 45 lb (20.4 kg)

Ship Weight: 7.4 lb (3.3 kg)

Mounting Surfaces: Wood stud, metal stud and concrete
(Metal stud and concrete accessories required)

ACCESSORIES

pg#

ACC215: Metal Stud Accessory Kit.....142
ACC203: Alligator® Concrete Anchors 142
ACC666: Safety Belt 144

Multi-Mount

For Audio and Video Equipment

- Holds multiple electronic components in a compact unit
- Adjustable width up to 20"
- Adjustable depth from 13.5" up to 19.5"
- Up to 4" lateral adjustment

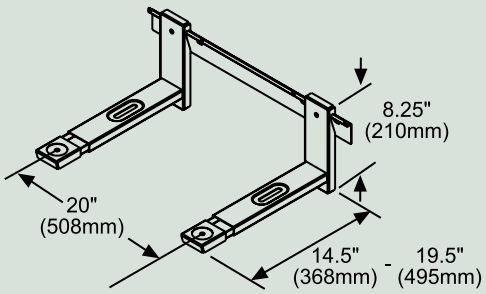

peerless® MOUNTS

Video Conference Shelf

For Video Conference Equipment

- Mounts to 16” to 24” wood studs
- Shelf can be installed above or below flat panel screen
- 4" of adjustable height to achieve ideal location of video conferencing equipment
- Includes hardware for wood stud mounting

* Includes standard hardware (hex or Phillips) for attaching screen to mount

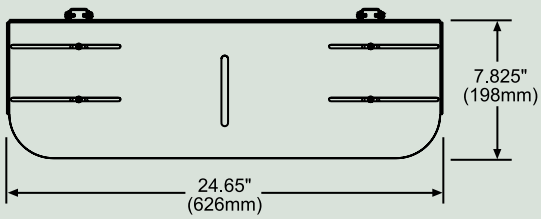

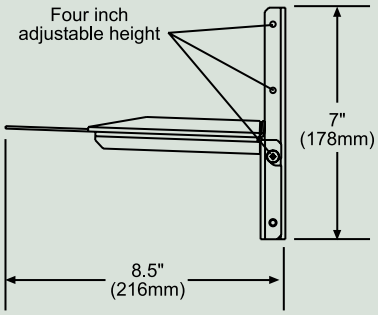

MODELS

Universal Models
Standard Fasteners*

ACC309	Black

SPECIFICATIONS

Dimensions:	(W x H x D) 24.64" x 7" x 8.5" (62.6 x 17.8 x 21.6 cm)
Max Load:	25 lb (11.3 kg)
Ship Weight:	6 lb (2.7 kg)
Mounting Surfaces:	Wood stud

MODELS

ACC924	White
ACC926	White

SPECIFICATIONS

Dimensions: (W x H x D)
ACC924: 48" x 3.13" x .66"
(121.9 x 8.0 x 1.7 cm)
ACC926: 72" x 3.13" x .66"
(182.8 x 8.0 x 1.7 cm)

Ship Weight:
ACC924: 1.3 lb (.5 kg)
ACC926: 1.7 lb (.7 kg)

Mounting Surfaces: Drywall

Cable Management Channel

- Keeps cables and cords out of sight
- Low profile—measures less than 3/4" from wall
- 2' increments butt together to create 4' (ACC924) or 6' lengths (ACC926)
- Flexible hinge allows simple snap action closure
- Includes drywall screws and anchors
- Paintable to match wall décor

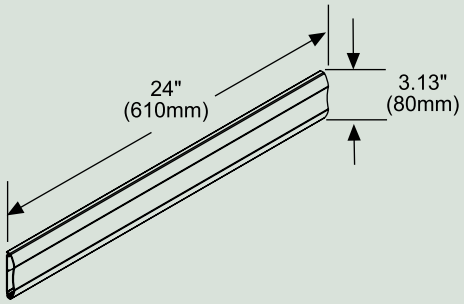



DVD/VCR Mount Connectors

For Articulating, Pivot and Ceiling Mounts

(DVD/VCR mount sold separately)

- Connects Peerless articulating, pivot and ceiling mounts to DVD/VCR mounts
- Screw attachment location provides theft-deterrence when DVD/VCR player is installed
- Can be installed without removing mount from wall
- Height adjustability allows DVD/VCR to sit flush with TV

* Includes standard hardware (hex or Phillips) for attaching screen to mount

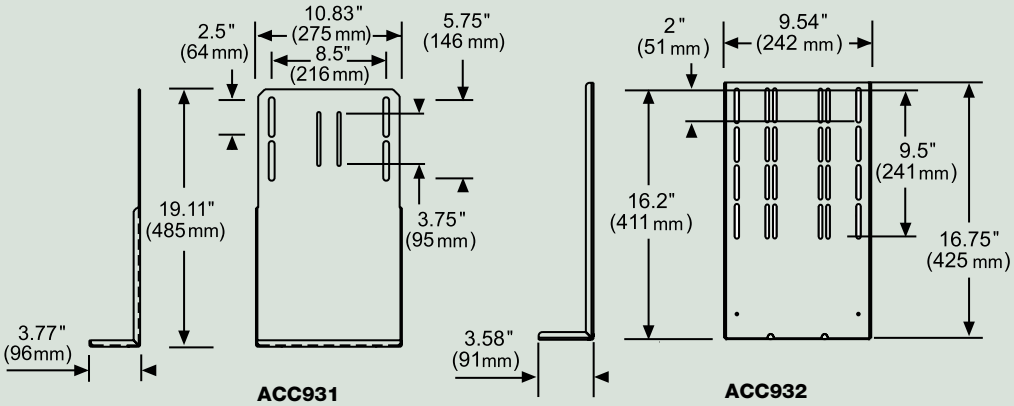

MODELS

Universal Models
Standard Fasteners*

ACC931	Black
ACC931-S	Silver
ACC932	Black
ACC932-S	Silver

DVD/VCR Connector Interface

ACC931: Connects DVD/VCR mounts and pivot/articulating/ceiling mounts with PLP model adapter plates

ACC932: Connects DVD/VCR mounts and pivot/articulating/ceiling mounts with VESA® 75, 100, 200 x 100 and 200 x 200 mm mounting holes

SPECIFICATIONS

Dimensions: (W x H x D)
ACC931: 10.83" x 19.11" x 3.77"
(27.5 x 48.53 x 9.57 cm)
ACC932: 9.54" x 16.75" x 3.58"
(24.23 x 42.54 x 9.09 cm)

Max Load: 30 lb (13.6 kg)

Ship Weight:
ACC931: 9 lb (4.08 kg)
ACC932: 6 lb (2.72 kg)

Mounting Surfaces: Peerless articulating wall arms and DVD/VCR mounts *(Requires Peerless VPM, SVPM or DS model DVD/VCR mounts)*

ACCESSORIES pg#

VPM, SVPM, DS models:
DVD/VCR mounts 128

MODELS

VPM, SVPM AND DS MODELS Black or silver (see chart)

SPECIFICATIONS

DIMENSIONS: See chart

MAX LOAD: 50 lb (22.7 kg)*

SHIP WEIGHT: See chart

* *When stacking units, do not exceed the load capacity of the TV mount and the maximum load capacity of 50 lbs (combined weight of DVD/VCR mounts and DVD/VCR).*

** *All Jumbo 2000 Mounts with the exception of JM2630, JM2640, JMW2630, JMW2640, JMC2630, JMC640, JMS2630, and JMS2640 which require VPM40-L or SVPM40-L (security version)*

*** *Classic, Designer, Small Slimlines, Multi-Display Mounts*

Adjustable DVD/VCR Mounts

For DVD players and VCRs

- Adjustable height and width
- Units can be stacked without additional accessories
- Accommodates most front loading DVD and VCR players
- Security versions available

MODEL	Compatibility	Color	Security	Width Range	Height Range	Ship Weight
	Jumbo 2000® Series					
VPM25-J	Jumbo 2000 Mounts**	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.7 lb *(2.1 kg)*
VPM25-JS	Jumbo 2000 Mounts**	Silver	No	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.7 lb *(2.1 kg)*
SVPM25-J	Jumbo 2000 Mounts**	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.7 lb *(2.1 kg)*
SVPM25-JS	Jumbo 2000 Mounts**	Silver	Yes	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.7 lb *(2.1 kg)*
VPM35-J	Jumbo 2000 Mounts**	Black	No	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
VPM35-JS	Jumbo 2000 Mounts**	Silver	No	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
SVPM35-J	Jumbo 2000 Mounts**	Black	Yes	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
SVPM35-JS	Jumbo 2000 Mounts**	Silver	Yes	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
VPM40-J	Jumbo 2000 Mounts**	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
VPM40-JS	Jumbo 2000 Mounts**	Silver	No	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
SVPM40-J	Jumbo 2000 Mounts**	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
SVPM40-JS	Jumbo 2000 Mounts**	Silver	Yes	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
VPM45-J	Jumbo 2000 Mounts**	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
VPM45-JS	Jumbo 2000 Mounts**	Silver	No	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
SVPM45-J	Jumbo 2000 Mounts**	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
SVPM45-JS	Jumbo 2000 Mounts**	Silver	Yes	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
VPM40-L	JM/JMW/JMC/JMS2630 JM/JMW/JMC/JMS2640	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5.6 lb *(2.5 kg)*
SVPM40-L	JM/JMW/JMC/JMS2630 JM/JMW/JMC/JMS2640	Black	Yes	5 13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5.6 lb *(2.5 kg)*
	Slimline® Series for 19"-20" TVs					
VPM25-W	LWB 354/530(T), WB20T	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.4 lb *(2 kg)*
SVPM25-W	LWB 354/530(T), WB20T	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.4 lb *(2 kg)*
VPM35-W	LWB 354/530(T), WB20T	Black	No	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	4.9 lb *(2.2 kg)*
SVPM35-W	LWB 354/530(T), WB20T	Black	Yes	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	4.9 lb *(2.2 kg)*
VPM40-W	LWB 354/530(T), WB20T	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
SVPM40-W	LWB 354/530(T), WB20T	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
VPM45-W	LWB 354/530(T), WB20T	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
SVPM45-W	LWB 354/530(T), WB20T	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
	Slimline® Series for 25"-27" TVs					
VPM25-S	LWB 375/375T, WB 27T	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.6 lb *(2.1 kg)*
SVPM25-S	LWB 375/375T, WB 27T	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4.6 lb *(2.1 kg)*
VPM35-S	LWB 375/375T, WB 27T	Black	No	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5.6 lb *(2.5 kg)*
SVPM35-S	LWB 375/375T, WB 27T	Black	Yes	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5.6 lb *(2.5 kg)*
VPM40-S	LWB 375/375T, WB 27T	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5.6 lb *(2.5 kg)*
SVPM40-S	LWB 375/375T, WB 27T	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5.6 lb *(2.5 kg)*
VPM45-S	LWB 375/375T, WB 27T	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	6.6 lb *(3 kg)*
SVPM45-S	LWB 375/375T, WB 27T	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	6.6 lb *(3 kg)*
	Classic Series™, Designer Series™, Small Slimline and Multi-Display					
DS25	Other Mounts***	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4 lb *(1.8 kg)*
DS25-SV	Other Mounts***	Silver	No	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4 lb *(1.8 kg)*
DS25S	Other Mounts***	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4 lb *(1.8 kg)*
DS25S-SV	Other Mounts***	Silver	Yes	13.25"-17.25" *(33.7-43.8 cm)*	1.5"-2.75" *(3.8-7 cm)*	4 lb *(1.8 kg)*
DS35	Other Mounts***	Black	No	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5 lb *(2.3 kg)*
DS35-SV	Other Mounts***	Silver	No	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5 lb *(2.3 kg)*
DS35S	Other Mounts***	Black	Yes	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5 lb *(2.3 kg)*
DS35S-SV	Other Mounts***	Silver	Yes	10.25"-14.25" *(26-36.2 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	5 lb *(2.3 kg)*
DS40	Other Mounts***	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
DS40-SV	Other Mounts***	Silver	No	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
DS40S	Other Mounts***	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
DS40S-SV	Other Mounts***	Silver	Yes	13.25"-17.25" *(33.7-43.8 cm)*	2.69"-4.5" *(6.8-11.4 cm)*	6 lb *(2.7 kg)*
DS45	Other Mounts***	Black	No	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
DS45-SV	Other Mounts***	Silver	No	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
DS45S	Other Mounts***	Black	Yes	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*
DS45S-SV	Other Mounts***	Silver	Yes	13.25"-17.25" *(33.7-43.8 cm)*	4.25"-5.75" *(10.8-14.6 cm)*	7 lb *(3.2 kg)*

Enclosed DVD/VCR Mounts

For DVD players and VCRs

- Fixed size encloses DVD/VCR on four sides for added security
- Security screws provide additional theft deterrence
- Can be retrofitted to an existing TV mount or stacked separately

MODELS

	Compatibility:
VPM081-J	Jumbo Mounts*
VPM081	Classic Series, Designer Series, Small Slimline® and Multi-display mounts
VPM081-W	LWB354T, LWB530T, WB20T
VPM081-S	LWB375T, WB27T

* *Except JM2630, JMW2630, JMC2630 and JMS2630 TV mounts*

SPECIFICATIONS

Dimensions:	(W x H x D) 19" x 4.125" x 9.375" (48.3 x 10.5 x 23.8 cm)
Max Load:	50 lb (22.7 kg)
Ship Weight:	10 lb (4.5 kg)

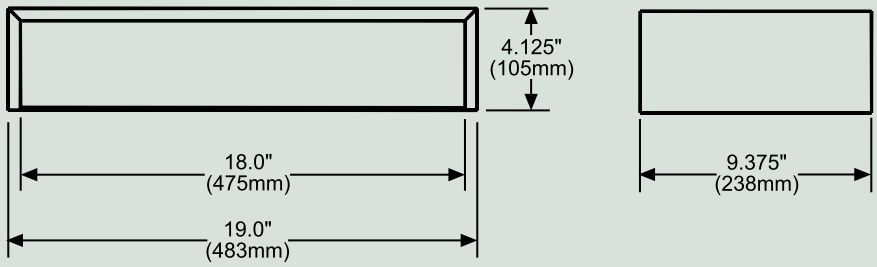

MODELS

LDM233K Black

SPECIFICATIONS

Dimensions: (W x H x D)
17" x .8" x 12"
(43.2 x 2.1 x 30.5 cm)

Max Load: 40 lb (18 kg)

Ship Weight: 6 lb (2.7 kg)

Desktop DVD/VCR Mount

For DVD Players and VCRs

- Two-piece tray with security fasteners and key lock
- Tray hole pattern fits most DVD/VCR equipment
- Holds equipment in fixed position

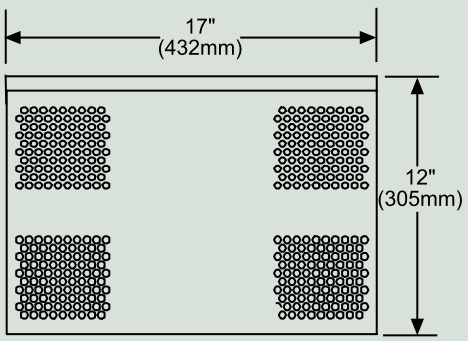

Flat Panel Speaker Mounts

For Center, Multi-Channel or 3-piece LCR Speakers

MSA-101

- 10.6" adjustable height to align speaker with bottom of screen
- MSA-101: Side-to-side adjustability for perfect positioning allows speaker to move with screen
- MSA-301: Side-to-side and vertical adjustability for positioning three speakers
- Mounts to Peerless pivot, articulating, ceiling and floor mounts
- Determine that combined weight of speaker(s), screen and MSA do not exceed rated load capacity of mount

MSA-301

* Includes theft resistant hardware for attaching screen to mount

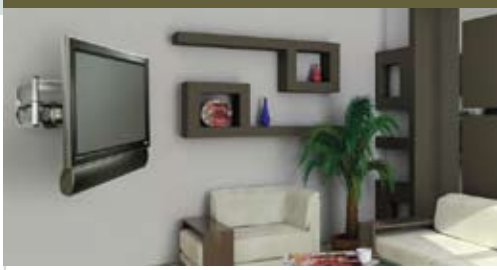

MODELS

Dedicated Models

Security Fasteners*

MSA-101	Black
MSA-101S	Silver
MSA-301	Black
MSA-301S	Silver

SPEAKER ADAPTER

Dedicated Models:

MSA-101: Accommodates Boston Acoustics model P400 and Polk Audio center channel speakers Contact technical support for compatibility with other models.

MSA-301: Accommodates 3-speaker Atlantic Technologies FS3200LR side and FS3200C center channel speakers. Contact technical support for compatibility with other models.

SPECIFICATIONS

Dimensions: (W x H x D)

MSA-101: 20" x 21.2" x 1.18" (50.8 x 53.9 x 2.9 cm)

MSA-301: 49"-64" x 27"-32" x .93" (123.4-161.8 x 69.7-80.1 x 2.3 cm)

Max Load:

MSA-101: 25 lb (11.3 kg)

MSA-301: 50 lb (22.6 kg)

Ship Weight:

MSA-101: 12.5 lb (5.7 kg)

MSA-301: 23.5 lb (10.6 kg)

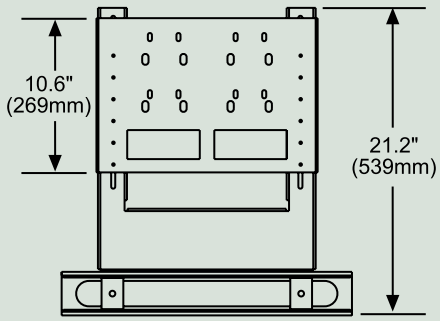

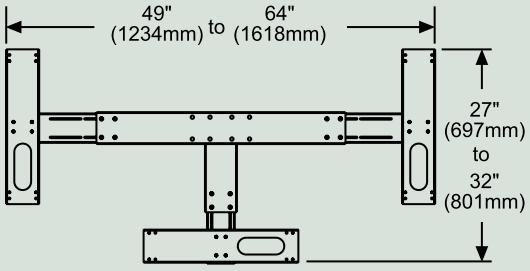

MODELS

Universal Models:
Standard Fasteners*

PSP2 (2 pack)	Black
PSP2W (2 pack)	White
PSP5 (5 pack)	Black
PSP5W (5 pack)	White

SPECIFICATIONS

Dimensions: (W x H x D)
3.37" x 3.25"-5.4" x 1.75"
(8.5 x 8.3-13.7 x 4.4 cm)

Tilt: ±90°
Swivel: 360°
Roll: 360°

Max Load: 8 lb (3.6 kg)

Ship Weight:
SPK722: 1.5 lb (.6 kg)
SPK725: 2.8 lb (1.2 kg)

Mounting Surfaces: Wood joist and concrete

PARAMOUNT™ by Peerless

Universal Speaker Mounts

For Speakers Weighing up to 8 lb

- Mounts to wall or ceiling
- Universal design fits most brands
- Easy tilt, pivot and rotation adjustments
- 2.25" ceiling extension included
- 1, 2 and 4 hole mounting adapters accommodate speakers with key hole and threaded inserts
- Includes installation and speaker attachment hardware

* Includes standard hardware (hex or Phillips) for attaching speakers to mount

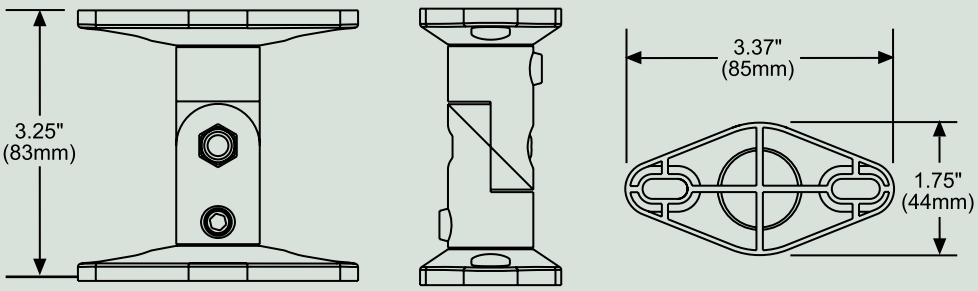

Universal Speaker Mounts

For Speakers Weighing up to 20 lb

- Ball and socket design provides 60° up or down of rotation
- Concealed mounting screws
- Flush mounted or used with 3" extensions
- Includes hardware for mounting most commercially available speakers
- Includes fasteners for wood studs, metal studs, concrete and drywall
- Speaker attachment hardware included
- Internal speaker wire management

* Includes standard hardware (hex or Phillips) for attaching speakers to mount

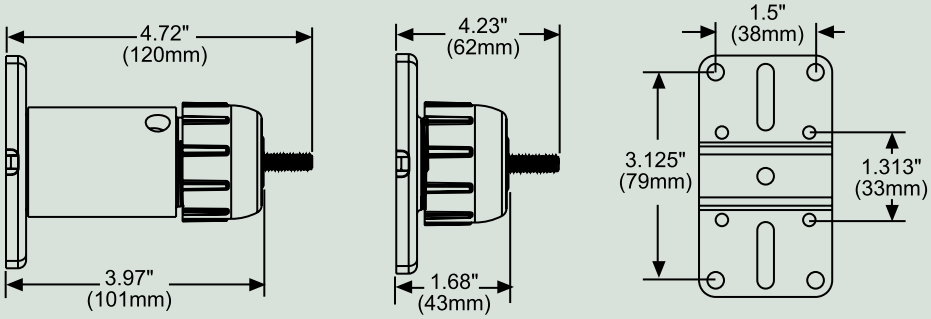

MODELS

Universal Models:
Standard Fasteners*

SPK811	Black
SPK811W	White

SPECIFICATIONS

Dimensions:	(W x H x D) 3.27" x 1.68"-3.97" x 2" (8.3 x 4.3-10.1 x 5.1 cm)
Tilt:	±60°
Swivel:	360°
Roll:	±60°
Max Load:	20 lb (9 kg)
Ship Weight:	.9 lb (.4 kg)
Mounting Surfaces:	Wood stud, metal stud, concrete and drywall

MODELS

Universal Models:
Standard Fasteners*

SPK815 Black

SPECIFICATIONS

Dimensions: (W x H x D)
6" x 12" x 9.125"
(15.2 x 30.5 x 23.2 cm)

Tilt: ±45°
Swivel: ±45°

Max Load: 75 lb (34 kg)

Ship Weight: 5 lb (2.2 kg)

Mounting Surfaces: Concrete
(Concrete accessory required)

ACCESSORIES pg#

ACC210: Concrete Expansion Anchors
4-pack 142

Universal Speaker Mount

For Speakers Weighing up to 75 lb

- Mounting plates have 4" x 4" cut-out for speaker wire access
- Up to ±45° pivot in vertical and horizontal directions
- Heavy gauge cold rolled steel construction
- Requires wall installation hardware

* Includes standard hardware (hex or Phillips) for attaching speakers to mount

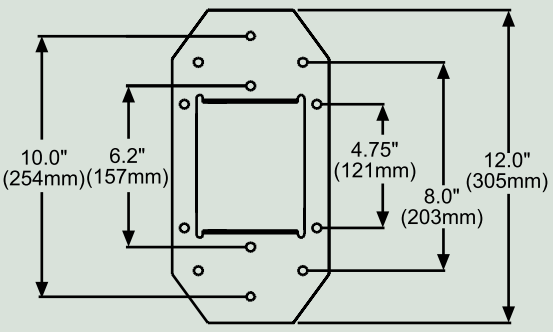

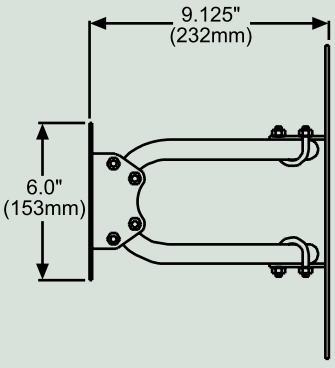

Camera Mounts

For Small to Medium Security Cameras

- Ball and socket for 360° swivel and 90° tilt for positioning direction of camera
- Engineered plastic eliminates electrical grounding problems
- Single point adjustment knob
- Cord management routing duct
- Patented design
- Can be wall mounted or ceiling mounted. Or mount directly to standard electrical outlet box.
- ¼-20 mounting stud for camera installtion

MODELS

CMR405	5" Camera Mount	Light Gray
CMR410	7" Camera Mount	Light Gray

SPECIFICATIONS

Dimensions: (W x H x D)
CMR405: 3" x 4.75" x 5" (7.6 x 12.1 x 12.7 cm)
CMR410: 3" x .4.75" x 7.37" (7.6 x 12.1 x 18.7 cm)

Tilt: 90°
Swivel: 360°

Max Load: 10 lb (4.5 kg)

Ship Weight: 1 lb (.5 kg)

Mounting Surfaces: Wall or ceiling





MODELS

PC25 Black
PC25G Light gray

SPECIFICATIONS

Dimensions: (W x H x D)
20" x 16.76" x 29.83"
(50.8 x 42.7 x 75.7 cm)

Tilt: 0°, 5°, 10°

Max Load: 110 lb (49.9 kg)

Ship Weight: 11.6 lb (5.3 kg)

Mounting Surfaces: Wood stud, metal stud and concrete
(Metal stud and concrete accessory required)

ACCESSORIES pg#

WSP Models: Metal Stud Wall Plate 141
ACC203: Alligator® Concrete Anchors .142

Computer Monitor Work Station

For Computer Monitor and Keyboard

- Support arm and tray swivel to allow monitor to be viewed in almost any direction
- TV and keyboard trays tilt to 0° (flat), 5°, 10°
- Mount at stand up or sit down height for most convenient work position

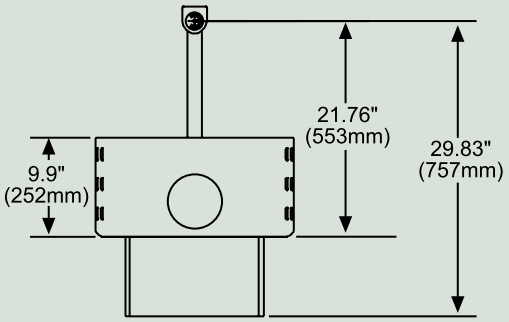



Ceiling Plate: *CMJ470(W), CMJ480(W), CMJ490(W)*

- Mounts to wood joists or structural concrete ceiling (requires concrete anchor ACC204, sold separately)
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

CMJ470: for 16" joist centers
CMJ480: for 20" joist centers
CMJ490: for 24" joist centers

Max Load: 300 lb (136 kg)
Ship Weight: **CMJ470** 3.2 lb (1.4 kg)
CMJ480 4.8 lb (2.2 kg)
CMJ490 5.7 lb (2.6 kg)
Color: Black or White

Internal Joist Mount: *ACC120*

- Expandable to mount between two wood joists from 16" to 20" centers
- Attachment point for extension column may be positioned at any point within 2-3/4" of either joist
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

Max Load: 300 lb (136 kg)
Ship Weight: 8 lb (3.6 kg)
Color: Black

Round Ceiling Plate: *ACC570(S)(W), ACC571*

- Mounts to wood joist or structural ceiling (requires concrete anchor ACC203, sold separately)
- Features cord management access hole
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column
- **ACC571:** Includes ACC570 and flush mount tube EXT002 for flush mount applications

Max Load: 150 lb (68 kg)
Ship Weight: **ACC570** 1.7 lb (.8 kg)
ACC571 2 lb (.9 kg)
Color: **ACC570** Black, Silver or White
ACC571 Black

Ceiling Plate: *ACC560*

- Mounts to wood joist, structural ceiling or concrete
- Low-profile design ideal for small screens and projector installations
- Unit has 1-1/2" – 11.5 NPT fitting for attachment of extension column

Max Load: 50 lb (22.7 kg)
Ship Weight: .93 lb (.4 kg)
Color: Black

Cathedral Ceiling Adapter: *ACC556*

- Mounts to cathedral or vaulted ceilings
- 120° (±60°) of adjustment
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

Max Load: 300 lb (136 kg)
Ship Weight: 4.6 lb (2.1 kg)
Color: White

Lightweight Cathedral Ceiling Adapter: *ACC912*

- Mounts to cathedral or vaulted ceilings
- 120° (±60°) of adjustment
- Compact, lightweight and easy to install

Max Load: 75 lb (34 kg)
Ship Weight: 1.9 lb (.9 kg)
Color: Black



Anti-Vibration Ceiling Plates: *ACC840, ACC845*

- Reduces vibrations that may cause internal damage to equipment and/or cause screen image to vibrate
- Features two cord management access holes
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

ACC840: for wood joist ceiling
ACC845: for Unistrut ceiling
(1-5/8" x 1-5/8" 12 gauge Unistrut)

Max Load: 60 lb (27.2 kg)
Ship Weight: **ACC840** 3 lb (1.4 kg)
ACC845 4 lb (1.8 kg)
Color: Black

Unistrut® and Structural Ceiling Plate: *CMJ300, CMJ310*

- Attaches directly to standard Unistrut (1-5/8" x 1-5/8") or to solid structural ceiling
- Unistrut fittings and attachment hardware not included
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

Max Load: 250 lb (113.6 kg)
Ship Weight: **CMJ300** 2 lb (.9 kg)
CMJ310 4 lb (1.8 kg)
Color: Black

Unistrut® Adapter for Truss Ceiling: *ACC550*

- For use with 1-5/8" x 1-5/8", 12 gauge Unistrut
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

Max Load: 250 lb (113.6 kg)
Ship Weight: 1.4 lb (.6 kg)
Color: Black

I-Beam Clamps: *ACC558, ACC559*

- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

ACC558: for 4"-8" wide, 1/4" to 1" thick I-Beam
ACC559: for 7"-12" wide, 1/4" to 1" thick I-Beam

Max Load: 250 lb (113.6 kg)
Ship Weight: **ACC558** 4.8 lb (2 kg)
ACC559 5.3 lb (2.4 kg)
Color: Black

Truss Ceiling Adapter: *ACC557*

- Attaches to a round square, rectangular, or I-Beam truss up to 3" wide x 3 1/2" high
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

Max Load: 1200 lb (544.3 kg)
Ship Weight: 3 lb (1.4 kg)
Color: Black

Structural Ceiling Plate with Stress Decoupler: *DCS200*

- Includes structural ceiling plate with integral high density rubber decoupler assembly to prevent vibrations
- Mounts to concrete beam, slab or other structural member
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

Max Load: 300 lb (136 kg)
Ship Weight: 6 lb (2.7 kg)
Color: Black

Truss Ceiling Adapter with Stress Decoupler: *DCT100*

- Includes truss ceiling plate with integral high density rubber decoupler assembly to prevent vibrations
- Attaches to round, square, rectangular or I-beam trusses up to 3" wide x 3 1/2" high
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column

Max Load: 300 lb (136 kg)
Ship Weight: 4 lb (1.8 kg)
Color: Black

Multi-Display Interface Bracket: *ACC600*

- Suspends flat panel mount from extension column to in-line, curvilinear and circular MDJ multi-display configurations
- For use with EXT or ADJ model extension columns
- For other applications that require mounting from pipe larger than 2" in dia., use ACC557

Max Load: 1200 lb (544.3 kg)
Ship Weight: 3.8 lb (1.7 kg)
Color: Black

Multi-Display I-Beam Clamps *DCT500, DCT600, DCT700, DCT800, DCT900*

- For use only with Peerless Multi-Display Systems in combination with adjustable length Extension Columns (ADD models)
- Includes structural ceiling plate with integral high density rubber decoupler assembly to prevent vibrations

DCT500: for 7"–12" wide, .25"–1" thick I-beams
DCT600: for 15"–19.5" wide, 1.5"–2" thick I-beams
DCT700: for 15"–19.5" wide, 2.5"–3" thick I-beams
DCT800: for 7"–12" wide, 2.5"–3" thick I-beams
DCT900: for 4"–7" wide, 2.5"–3" thick I-beams

Max Load: 600 lb (272 kg)
Ship Weight: **DCT500** 9.4 lb (4.3 kg)
DCT600 13.1 lb (6 kg)
DCT700 13.6 lb (6.2 kg)
DCT800 14 lb (6.4 kg)
DCT900 9 lb (4.1 kg)
Color: Black

Multi-Display Truss Ceiling Stress Decoupler: *DCT300*

- Includes truss ceiling plate with integral high density rubber decoupler assembly to prevent vibrations
- Attaches to round, square, rectangular or I-beam trusses up to 3" wide x 3 1/2" high
- Stub fitting accepts adjustable or fixed length ADD model extension columns

Max Load: 1200 lb (544.3 kg)
Ship Weight: 4.6 lb (2.1 kg)
Color: Black

Multi-Display Structural Ceiling Stress Decoupler: *DCS400*

- Includes structural ceiling plate with integral high density rubber decoupler assembly to prevent vibrations
- Stub fitting accepts adjustable or fixed length ADD model extension columns

Max Load: 1200 lb (544.3 kg)
Ship Weight: 7.8 lb (3.5 kg)
Color: Black

Suspended Ceiling Plate: *CMJ450*

- Replaces 2'x2' ceiling tile and secures to structural ceiling with tie wires
- Includes tie wire supports and ceiling plate with two knockout panels for outlet boxes and antenna leads (knockouts are for half-size handy boxes with flanges)
- Unit has 1-1/2"-11.5 NPT fitting for attchment of extension column
- Variable position suspended ceiling plate also available

Max Load: 250 lb (114 kg)
Ship Weight: 21.1 lb (9.6 kg)
Color: White

Variable Position Suspended Ceiling Kit: *CMJ453*

- Replaces 2'x2' ceiling tile and secures to structural ceiling with tie wires
- Two-piece design offers five different points for mount attachment
- Includes tie wire supports, flush mount tube and offers two knockout panels for outlet boxes
- Unit has 1-1/2"-11.5 NPT fitting for attchment of extension column

Max Load: 250 lb (113.6 kg)
Ship Weight: 21.4 lb (9.7 kg)
Color: White

Lightweight Suspended Ceiling Kit: *CMJ455*

- Replaces a 2' x 2' ceiling tile or mounts above existing 2' x 2' or 2' x 4' ceiling tile to structural ceiling with tie wires
- Two-piece design offers five different points for mount attachment
- Includes tie wire supports, flush mount tube and offers two knockout panels for outlet boxes
- Unit has 1-1/2"-11.5 NPT fitting for attchment of extension column

Max Load: 50 lb (22.7 kg)
Ship Weight: 14.6 lb (6.6 kg)
Color: White

Lightweight Adjustable Suspended Ceiling Kit: *CMJ500*

- Mounts above 2' x 2' or 2' x 4' ceiling tile to structural ceiling with tie wires
- Includes tie wire supports, flush mount tube and offers two knockout panels for outlet boxes
- Allows 13.9" uninterrupted adjustment

Max Load: 60 lb (27.2 kg)
Ship Weight: 7.7 lb (3.5 kg)
Color: White

Accessory Pack for CMJ455: *ACC455*

- Includes four hanger brackets and four hanger clamps for additional stability
- For use with model CMJ455

Ship Weight: 2 lb (.9 kg)
Color: Black

Fixed Length Extension Column: *EXT Models*

- 1-1/2"-11.5 NPT schedule 40 pipe threaded on both ends. Notched for use with screw to provide safety and security
- Extension column lengths measure 3.5" longer then stated drop to provide finished drop length for various mounts (i.e. EXT 101 measures 15.5")

Model	Drop*	Ship Weight
EXT002(S)**	Flush	1 lb (.4 kg)
EXT006(S)	6" (15 cm)	2.3 lb (1 kg)
EXT018(S)	18" (46 cm)	4 lb (1.8 kg)
EXT101(S)	1' (.3 m)	3.7 lb (1.7 kg)
EXT102(S)	2' (.6 m)	6 lb (2.7 kg)
EXT103(S)	3' (.9 m)	9 lb (4.1 kg)
EXT104(S)	4' (1.2 m)	10 lb (4.5 kg)
EXT105(S)	5' (1.5 m)	15 lb (6.8 kg)
EXT106(S)	6' (1.8 m)	16 lb (7.3 kg)
EXT107(S)	7' (2.1 m)	18 lb (8.2 kg)
EXT108(S)	8' (2.4 m)	20 lb (9.1 kg)
EXT109(S)	9' (2.7 m)	26 lb (11.8 kg)
EXT110(S)	10' (3.1 m)	29 lb (13.2 kg)

* Drop length applies to Jumbo 2000 mount installations

** For projector installations only

Max Load: 1200 lb (544.3 kg)
Color: Black or Silver

Adjustable Extension Column: *ADJ Models*

- 1-1/2"-11.5 NPT schedule 40 pipe threaded on both ends. Notched for use with screw to provide safety and security
- Height adjustment at 1" increments
- Extension column lengths measure 3.5" longer then stated drop to provide finished drop length for various mounts (i.e. ADJ012018 measures 21.5")

Model	Drop	Ship Weight
ADJ006009	6"–9" (15–23 cm)	2.8 lb (1.3 kg)
ADJ012018	12"–18" (30–46 cm)	4.8 lb (2.2 kg)
ADJ018024	18"–24" (46–61 cm)	7 lb (3.2 kg)
ADJ0203	2–3' (.6–.9 m)	9.1 lb (4.1 kg)
ADJ0305	3'–5' (.9–1.2 m)	14 lb (6.4 kg)
ADJ0406	4'–6' (1.2–1.5 m)	16.6 lb (7.5 kg)
ADJ0507	5–7' (1.5–2.1 m)	22 lb (10 kg)
ADJ0608	6'–8' (1.8–2.4 m)	23 lb (10.4 kg)
ADJ0709	7'–9' (2.1–2.7 m)	25 lb (11.3 kg)
ADJ0810	8'–10' (2.4–3.1 m)	27.6 lb (12.5 kg)
ADJ0911	9'–11' (2.7–3.4 m)	31.2 lb (14.2 kg)
ADJ1012	10'–12' (3.1–3.7 m)	34 lb (15.4 kg)

Max Load: 900 lb (408.2 kg)
Color: Black

Multi-Display™ Extension Column:
ADD Models (Fixed and Adjustable Extension Columns for Ceiling Decouplers)

- Drop length of final display assembly will vary according to selected decoupler unit. See technical data sheet at www.peerlessmounts.com for complete information.

Model	Drop	Ship Weight
ADD101	1' (30.5 cm)	4.6 lb (2.1 kg)
ADD102	2' (61 cm)	7.1 lb (3.2 kg)
ADD103	3' (91.5 cm)	11.3 lb (5.1 kg)
ADD104	4' (1.22 m)	13.4 lb (6.1 kg)
ADD105	5' (1.52 m)	17.8 lb (8.1 kg)
ADD106	6' (1.83 m)	20.5 lb (9.3 kg)
ADD107	7' (2.13 m)	25.8 lb (11.7 kg)
ADD108	8' (2.44 m)	28.2 lb (12.8 kg)
ADD109	9' (2.74 m)	35.8 lb (16.2 kg)
ADD110	10' (3.05 m)	38.2 lb (17.3 kg)
ADD012018	12"–18" (30–46 cm)	5 lb (2.3 kg)
ADD018024	18"–24" (46–61 cm)	5.5 lb (2.5 kg)
ADD0203	2'–3' (0.6–0.9 m)	8.2 lb (3.7 kg)
ADD0305	3'–5' (0.9–1.2 m)	13.3 lb (6 kg)
ADD0406	4'–6' (1.2–1.5 m)	16 lb (7.3 kg)
ADD0507	5'–7' (1.5–2.1 m)	21 lb (9.5 kg)
ADD0608	6'–8' (1.8–2.4 m)	22 lb (10 kg)
ADD0709	7'–9' (2.1–2.7 m)	26 lb (11.7 kg)
ADD0810	8'–10' (2.4–3.1 m)	28 lb (12.7 kg)
ADD0911	9'–11' (2.7–3.4 m)	30.3 lb (13.7 kg)
ADD1012	10'–12' (3.1–3.7 m)	34 lb (15.4 kg)

Max Load: 1200 lb (544.3 kg)
Color: Black

Columns longer than 9' wrapped in vinyl

Extension Column Connector:
ACC109

- Two female connectors to join two extension columns to create maximum length of 20'
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column
- Security screws included

Max Load: 1200 lb (544.3 kg)
Ship Weight: 1.1 lb (.5 kg)
Color: Black

Threaded Rod Adapter:
ACC810

- For use with thread rod ACC820
- Has 1-1/2" x 11.5 NPT male thread for use with Peerless mounts and ceiling accessories
- Security screws included

Max Load: 50 lb (22.7 kg)
Ship Weight: 1 lb (.5 kg)
Color: Black

Connector with Cord Management
ACC800, ACC850(S)

- 1 ½" access hole for internal cord management
- Unit has 1-1/2"-11.5 NPT fitting for attachment of extension column
- Security screws included
- ACC800- One male and one female connection to provide internal cord management between extension column and mount or ceiling plate
- ACC850 –Two female connectors to provide internal cord management and join two extension columns to create maximum eight of 20'

Max Load: 300 lb (136 kg)
Ship Weight: ACC800: .5 lb (.2 kg)
ACC850(S): .39 lb (.17 kg)
Color: ACC800: Black
ACC850: Black or Silver

Ceiling/Wall Extension Kit
For use with PRG-UNV and PRS-UNV Projector Mounts

- EXA and EXB series for ceiling or wall mounting
- EXC models for ceiling mounting
- Integrated cable management
- Various height adjustments for ideal viewing positions

Model	Extension	Position	Ship weight
EXA/S/W	8.7"-12.8" (22-32.5 cm)	Ceiling	4.6 lb (2 kg)
EXA/S/W	9.7"-13.8" (24.6-35 cm)	Wall	4.6 lb (2 kg)
EXB/S/W	2.6"-20.6" (32.2-52.5 cm)	Ceiling	5 lb (2.2 kg)
EXB/S/W	13.7"-21.7" (34.8-55.1)	Wall	5 lb (2.2 kg)
EXC/S/W	19.1"-32.9" (48.5-83.5 cm)	Ceiling	6.1 lb (2.7 kg)

Max Load: 50 lb (22.6 kg)
Color: Black, Silver or White

Extension Column Stabilizer Kit:
ACC050

- Reduces unwanted swaying that may occur with long drop lengths
- For use with 1-1/2" schedule 40 extension columns

Ship Weight: 2.8 lb (1.3 kg)
Color: Black

Escutcheon Ring: *ACC640(-B)(-W)*

- Covers hole where extension column passes through ceiling
- Hinged ring wraps around 1-1/2" schedule 40 extension column (not needed with any suspended ceiling)

Ship Weight: .2 lb (.09 kg)
Color: Chrome, Black or White

Cord Wrap: *ACC852(S)(W), ACC856(W)*

- Designed to externally route cords along outside of extension column
- Sections can be stacked to create longer lengths or cut to desired length

ACC852: Four 2' sections
ACC856: Four 6' sections

Ship Weight:
ACC852 2 lb (.9 kg)
ACC856 6 lb (2.7 kg)
Color: Black, Silver or White

Projector Wall Arm: *PWA-14(S)(W)*

- Mounts to single wood stud or concrete wall (requires concrete anchor ACC203, sold separately)
- Offers 14.25" reach
- Includes flush mount adapter

Max Load: 50 lb (22.7 kg)
Ship Weight: 5 lb (2.3 kg)
Color: Black, Silver or White

Side-to-Side Adjuster: *ACC830*

- 4" of radial side to side adjustment
- May be used with extension column or projector wall arm
- Includes Flush Mount Tube, EXT002

Max Load: 50 lb (22.7 kg)
Ship Weight: 2 lb (.9 kg)
Color: Black

Concrete Wall Back-Up Plate: *WSP415*

- For cinder block installations
- Mounts on opposite side of wall from TV mount by bolting through wall
- Mounting hardware not included

Max Load: 150 lb (68 kg)
Ship Weight: 2.3 lb (1 kg)
Color: Black

Wall Arms: *WMJ018, WMJ022, WMJ022CB, WMJ025H*

- 1-1/2"-11.5 NPT threaded fitting accepts flush mount tube or extension column
- Comes with wood screws
- **WMJ018:** Single Arm
  Reach: 18" (45.7 cm)
  Shipping weight: 12 lb (5.4 kg)
- **WMJ022:** Single Arm
  Reach: 22.5" (57.2 cm)
  Shipping weight: 13 lb (5.9 kg)
- **WMJ025H:** Double Arm
  Reach: 25" (63.5 cm)
  Shipping weight: 18 lb (8.2 kg)
- **WMJ022-CB:** Single Arm for cinder block features wider wall plate footprint to spread load against concrete block wall, and comes with ALLIGATOR® concrete anchors.
  Reach: 22.5" (57.2 cm)
  Shipping weight: 10.5 lb (4.8 kg)

Max Load:
Wood: 125 lb (57 kg) single arm
Concrete: 150 lb (68 kg) single arm
300 lb (137 kg) double arm
Cinder Block: 150 lb (68 kg) single arm

Color: Black

Metal Stud Wall Plates - Double Stud: *WSP420(W), WSP425(W), WSP430(W), WSP435(W), WSP440(W), WSP445(W)*

- For use on 25 gauge or heavier metal studs to span load between two studs with 16", 20" or 24" centers
- Can also be used on wood studs
- Compatible with most Peerless single wall arms
- Offered with or without electrical knockouts.

WSP420/ WSP420W: 16" centers
Ship Weight: 11 lb (5 kg)

WSP425/ WSP425W: 16" centers with knockouts
Ship Weight: 11 lb (5 kg)

WSP430/ WSP430W: 20" centers
Ship Weight: 14 lb (6.3 kg)

WSP435/ WSP435W: 20" centers with knockouts
Ship Weight: 13 lb (5.9 kg)

WSP440/ WSP440W: 24" centers
Ship Weight: 16 lb (7.3 kg)

WSP445/ WSP445W: 24" centers with knockouts
Ship Weight: 15 lb (6.8 kg)

Max Load: 125 lb (57 kg)
Color: Black or White

Metal Stud Wall Plate - Triple Stud: *WSP450(W), WSP460(W), WSP470(W)*

- For use on 25 gauge or heavier metal studs to span load between three studs with 16", 20" or 24" centers
- Compatible with most double arm Peerless wall arms
- Pre-scored electrical knockouts.

WSP450/ WSP450W: 16" centers
Ship Weight: 24.5 lb (11.1 kg)

WSP460/ WSP460W: 20" centers
Ship Weight: 30 lb (13.6 kg)

WSP470/ WSP470W: 24" centers
Ship Weight: 33.5 lb (15.2 kg)

Max Load: 175 lb (79.3 kg)
Color: Black or White

Wood Stud Internal Wall Plate: *WSP414*

- For 16" stud centers
- Fits most Peerless single wall arms
- Mounting hardware for attachment to stud not provided
- Includes screws for attachment of wall arm to wall plate

Max Load: 150 lb (68 kg)
Ship Weight: 9 lb (4.1 kg)
Color: Black

Metal Stud Wall Plate - Triple Stud: *WSP716(S)(W)(GB)(GS), WSP724(S)(W)(GB)(GS)*

- Compatible with PLA Series Wall Mount
- Designed to span the load between three studs
- Offered with electrical knockouts

WSP716 Models: 16" centers
Ship Weight: 20.4" (9.2 cm)

WSP724 Models: 16", 20", 24" centers
Ship Weight: 30.9" (14.0 cm)

Max Load: 200 lb (90.7 kg)
Color: Black, High-Gloss Black, Silver, High-Gloss Silver or White

Metal Stud Wall Plate for SP740P models - Double Stud: *WSP490(S)*

- For use on 25 gauge or heavier metal studs to span load between two studs with 16" centers
- Offered with electrical knockouts

Max Load: 50 lb (22.7 kg)
Ship Weight: 8.2 lb (3.7 kg)
Color: Black or Silver

Metal Stud Wall Kit: *ACC908*

- For use with SP730P, SA730P and SAL730P model LCD screen mounts when mounting to metal stud
- Includes fasteners to attach mount to plate and plate to metal stud wall

Max Load: 25 lb (11.3 kg)
Ship Weight: 2.1 lb (.95 kg)
Color: Silver

Concrete Expansion Anchor: *ACC200, ACC205, ACC210*

- Not recommended for concrete block applications (see ACC203, ACC204 for all types of concrete and cinder block applications)

ACC200: 2 anchors
ACC205: 3 anchors
ACC210: 4 anchors

Ship Weight:
ACC200/205: .2 lb (.09 kg)
ACC210: 1 lb (.4 kg)

ALLIGATOR® Concrete Anchors: *ACC203, ACC204, ACC250*

- For attachment to concrete and concrete block
- Used in conjunction with #14 wood screws (supplied with mount and/or ceiling plate)

ACC203: 3 anchors
ACC204: 4 anchors
ACC250: 50 anchor sleeves (bulk pack)

Ship Weight:
ACC203/204: 1 lb (.4 kg)
ACC250: .19 lb (.08 kg)

Metal Stud Fastener Kit: *ACC215, ACC415, ACC615*

- For mounting Peerless wall mounts to 25 gage or heavier metal studs

ACC215: 2 togglers
ACC415: 4 togglers
ACC615: 6 togglers

Ship Weight:
ACC215: .19 lb (.09 kg)
ACC415: .32 lb (.1 kg)
ACC615: .47 lb (.2 kg)

OSHPD Cinder Block Fasteners: *OP-ACC307*

- For use when installing Peerless OSHPD wall mounts to cinder block
- Includes 10 threaded rods and fasteners for installing through wall

Ship Weight: 1.5 lb (.6 kg)

OSHPD Concrete Fasteners: *OP-ACC204*

- For use when installing Peerless OSHPD wall mounts to concrete
- Includes 10 1/4" x 3" power wedge bolts and washers

Ship Weight: 1 lb (.4 kg)

Electrical Outlet Strip with Cord Wrap: *ACC652*

- For use with Peerless Jumbo® Cart, models JCT-P1642E, -P2642CE, -2642, -2642E, -WB44, -WB44E, -MOC39E
- Includes outlet strip with three outlets
- 15' long cord with a hanger clamp and cord wrap

Ship Weight: 3 lb (1.3 kg)
Color: Black

Electrical Outlet Strip with Cord Wrap: *ACC320*

- For use with SR Flat Panel Cart series
- Includes outlet strip with three outlets
- 20' long cord with hanger clamp and cord wrap

Ship Weight: 3 lb (1.3 kg)
Color: Black

Electrical Outlet Strip: *ACC552*

- For use with JCT100/JCT200 Jumbo® carts
- Includes outlet strip with three outlets
- 20' long cord with hanger clamp

Ship Weight: 3 lb (1.3 kg)
Color: Black

8" Dia. Wheel with Rigid Tire: *ACC503-1, ACC503-2*

- For JCT100/200 only

ACC503-1: Swivel wheel with brake
Ship Weight: 6 lb (2.7 kg)

ACC503-2: Fixed wheel
Ship Weight: 7 lb (3.1 kg)

ACC 503-1 shown

Feet Accessory: *ACC310*

- Four feet for stationary cart placement
- Hard plastic base with steel casing

Ship Weight: 1 lb (.36 kg)
Color: Black

Base Shelf: *ACC315*

- For SR Series Flat Panel TV Cart
- Additional storage space for PC or larger components
- Designed with slots for safety belt (ACC316) to secure equipment

Max Load: 50 lb (22.6 kg)
Ship Weight: 7.6 lb (3.4 kg)
Color: Black

Equipment Support: *ACC102*

- Can be added to the Electronics Tower, model PM610, for extra equipment
- Includes foam pads

Max Load: 15 lb (6.8 kg)
Ship Weight: 3 lb (1.4 kg)
Color: Black

Video Conferencing Shelf: *ACC319*

- Mounts directly on top of SS stands and SR carts
- Adjusts in height along with screen

Max Load: 50 lb (22.7 kg)
Ship Weight: 12.8 lb (5.8 kg)
Color: Black

Video Conferencing Shelf: *ACC308(S)*

- For video conferencing camera
- Hooks onto horizontal cross-support of Jumbo 2000® mounts 2650 and larger
- 24.8" W x 7.8" D shelf

Max Load: 25 lb (11.6 kg)
Ship Weight: 6 lb (2.7 kg)
Color: Black or Silver

Metal Shelf: *ACC313*

- Metal shelf mounts directly to post of SR Series flat panel cart
- Installs above or below flat panel screen
- Holds A/V or computer accessories
- Designed with slots for safety belt (ACC316) to secure equipment

Max Load: 50 lb (22.7 kg)
Ship Weight: 10.5 lb (4.7 kg)
Color: Black

Laptop Arm: *ACC314*

- Attaches directly to post of SR series carts and SS series stands
- Supports laptop
- Vertical height and 180° swivel adjustability
- Quick-release knob for easy height adjustment

Max Load: 10 lb (4.5 kg)
Ship Weight: 10.3 lb (4.6 kg)
Color: Black

Tempered Glass Shelf: *ACC317, ACC317-S, ACC318, ACC318-S, ACC318-GB*

- Tempered glass shelf designed to hold A/V components and accessories
- Attaches directly to SS stands and SR carts

Max Load: 50 lb (22.7 kg)
Ship Weight: 14.2 lb (6.4 kg)
Color:
ACC317(-S) clear shelf, black or silver brackets
ACC318(-S) tinted shelf, black or silver brackets
ACC318-GB tinted shelf, high gloss piano black brackets

Equipment Accessory Shelf: *ACC833*

- Accommodates A/V components
- Mounts to 3.5" pole used in Peerless' COL model pedestal displays
- Can be mounted anywhere along the length of the column, facing any direction

Max Load: 40 lb (18.2 kg)
Ship Weight: 10.1 lb (4.6 kg)
Color: Black

Dual-Screen Cartridge: *ACC604*

- For use with Flat Panel Display Stand (FPZ-600)
- For two stacked screens and four-screen formation

Ship Weight: 12.06 lb (5.4 kg)
Color: Black

Safety Belt: *ACC322*

- Safety belt for PS200 Component Shelf
- Holds components in place
- Tear-resistant nylon

Ship Weight: 1 lb (.4 kg)
Color: Black

Safety Belt: *ACC111*

- Wraps around back of Jumbo 2000® TV mount for additional roll out protection

Max Load: 150 lb (68.1 kg)
Ship Weight: 1 lb (.5 kg)
Color: Black

Safety Belt: *ACC666*

- Heavy-duty black nylon safety belt
- 13-foot endless loop ratchet tie-down
- Recommended for use with Jumbo® mounts and carts

Max Load: 300 lb (136 kg)
Ship Weight: .7 lb (.3 kg)
Color: Black

Safety Belt: *ACC316*

- 8' belt to secure equipment to shelves with slots
- Tear-resistant nylon

Ship Weight: 0.3 lb (.1 kg)
Color: Black

Armor Lock Plus™ Security Cable: *ACC020*

- Can be used with any projector with Kensington® slot built into chassis
- Features the Kensington lock with security cable and attachment plate for projector mount

Ship Weight: .98 lb (.4 kg)
Color: Silver

Armor Lock Plus™ Security Cable: *ACC021*

- ACC021 is cabling security option that can be used with any projector.
- Ships with permanent high-strength adhesive and attachment plate
- Can be attached using either security screw or adhesive

Ship Weight: .9 lb (.4 kg)
Color: Black

Security Fasteners for SA730, SAL730 and SP730 Wall Arms: *ACC918*

- Screen side security fasteners for theft resistance

Ship Weight: .36 lb (.1 kg)
Color: Black

Security Fasteners for SP740P & SA740P Wall Arms: *ACC919*

- Screen-side security fasteners for theft resistance

Ship Weight: .49 lb (.2 kg)
Color: Black

Security Fasteners for SA745PU, SA750PU & SA760PU Wall Arms: *ACC925*

- Screen-side security fasteners for theft resistance

Ship Weight: .84 lb (.31 kg)
Color: Black

Security Fasteners: *ACC502*

- M10 penta-pin screws for Jumbo Mounts
- Kit includes installation tool

Ship Weight: 2 lb (.9 kg)

Oversized Roll-Out Protectors: *ACC016*

- For use with Jumbo 2000® TV Mounts in place of regular side clamp
- Grips TV instead of side speakers
- 4.25" of grip in front of monitor
- Sold in pairs

Ship Weight: 1 lb (.6 kg)
Color: Black

Bumper Guards: *ACC103, ACC104*

- Provides protection by padding front corners of mount tray
- ACC103: Fits all Jumbo® Mounts
- ACC104: Fits all Slimline® Mounts
- Sold in pairs

Ship Weight: **ACC103** 2 lb (.9 kg)
ACC104 1 lb (.6 kg)
Color: Black

Index

Model	Page #
ACC016	145
ACC020	145
ACC021	145
ACC050	140
ACC102	143
ACC103	145
ACC104	145
ACC109	140
ACC111	144
ACC120	137
ACC200	142
ACC203	142
ACC204	142
ACC205	142
ACC210	142
ACC215	142
ACC250	142
ACC308	143
ACC308S	143
ACC309	125
ACC310	143
ACC313	144
ACC314	144
ACC315	143
ACC316	144
ACC317	144
ACC317-S	144
ACC318	144
ACC318-GB	144
ACC318-S	144
ACC319	143
ACC320	143
ACC322	144
ACC415	142
ACC455	139
ACC502	145
ACC503-1	143
ACC503-2	143
ACC550	137
ACC552	143
ACC556	137
ACC557	138
ACC558	138
ACC559	138
ACC560	137
ACC570	137

Model	Page #
ACC570S	137
ACC570W	137
ACC571	137
ACC600	138
ACC615	142
ACC604	144
ACC640	140
ACC640-B	140
ACC640-W	140
ACC652	143
ACC666	144
ACC800	140
ACC810	140
ACC830	141
ACC833	144
ACC840	137
ACC845	137
ACC850	140
ACC850S	140
ACC852	140
ACC852S	140
ACC852W	140
ACC856	140
ACC856W	140
ACC908	142
ACC912	137
ACC918	145
ACC919	145
ACC924	126
ACC925	145
ACC926	126
ACC931	127
ACC931-S	127
ACC932	127
ACC932-S	127
ADD012018	140
ADD018024	140
ADD0203	140
ADD0305	140
ADD0406	140
ADD0507	140
ADD0608	140
ADD0709	140
ADD0810	140
ADD0911	140

Model	Page #
ADD1012	140
ADD101	140
ADD102	140
ADD103	140
ADD104	140
ADD105	140
ADD106	140
ADD107	140
ADD108	140
ADD109	140
ADD110	140
ADJ006009	139
ADJ012018	139
ADJ018024	139
ADJ0203	139
ADJ0305	139
ADJ0406	139
ADJ0507	139
ADJ0608	139
ADJ0709	139
ADJ0810	139
ADJ0911	139
ADJ1012	139
CMJ300	137
CMJ310	137
CMJ450	139
CMJ453	139
CMJ455	139
CMJ470	137
CMJ470W	137
CMJ480	137
CMJ480W	137
CMJ490	137
CMJ490W	137
CMJ500	139
CMR405	135
CMR410	135
COL510P	79
COL610P	79
COL710P	79
COL810P	79

Index

Model	Page #
CS9	103
CS13	103
DCS200	138
DCS400	138
DCT100	138
DCT300	138
DCT500	138
DCT600	138
DCT700	138
DCT800	138
DCT900	138
DS13	104
DS13-SV	104
DS20	104
DS20-SV	104
DS25	128
DS25S	128
DS25S-SV	128
DS25-SV	128
DS27	104
DS27-SV	104
DS32	104
DS32-SV	104
DS35	128
DS35S	128
DS35S-SV	128
DS35-SV	128
DS40	128
DS40S	128
DS40S-SV	128
DS40-SV	128
DS45	128
DS45S	128
DS45S-SV	128
DS45-SV	128
ECI300	83
ECI300-S	83
ECO300-SS	83

Model	Page #
EEPS-42A	81
EL42AH	82
EL42AH-S	82
EL42F	82
EL42F-S	82
EL50AH	82
EL50AH-S	82
EL50F	82
EL50F-S	82
EPI800	83
EPI800-S	83
EPO800-SS	83
EWI	83
EWI-S	83
EWO-SS	83
EXA	140
EXA-S	140
EXA-W	140
EXB	140
EXB-S	140
EXB-W	140
EXC	140
EXC-S	140
EXC-W	140
EXT002	139
EXT002S	139
EXT006	139
EXT006S	139
EXT018	139
EXT018S	139
EXT101	139
EXT101S	139
EXT102	139
EXT102S	139
EXT103	139
EXT103S	139
EXT104	139
EXT104S	139
EXT105	139
EXT105S	139
EXT106	139
EXT106S	139

Model	Page #
EXT107	139
EXT107S	139
EXT108	139
EXT108S	139
EXT109	139
EXT109S	139
EXT110	139
EXT110S	139
FPZ-600	78
IB40	61
IB40-S	61
IB40-W	61
IM740P	10, 11, 62
IM740P-S	10, 11, 62
IM760P	10, 11, 63
IM760P-S	10, 11, 63
IM760PU	10, 11, 63
IM760PU-S	10, 11, 63
JCT100	113
JCT200	113
JCT305	113
JCT-2642E	96, 115
JCT-P1642E	97, 116
JCT-P2642CE	98, 117
JCT-P2854CE	99, 118
JCT-P2854E	99, 118
JCTWB44	95,114
JCTWB44E	95, 114
JM2630	110
JM2630S	110
JM2640	110
JM2640D	110
JM2640DS	110
JM2640S	110
JM2650	110
JM2650D	110
JM2650DS	110
JM2650PA	110
JM2650PAS	110
JM2650S	110
JM2655	110
JM2655S	110

Index

Model	Page #
JM2660	110
JM2660S	110
JM2665	110
JM2665S	110
JM2670	110
JM2670S	110
JM2675	110
JM2675S	110
JMC2630	108
JMC2630S	108
JMC2640	108
JMC2640D	108
JMC2640DS	108
JMC2640S	108
JMC2650	108
JMC2650D	108
JMC2650DS	108
JMC2650S	108
JMC2655	108
JMC2655S	108
JMC2660	108
JMC2660S	108
JMC2665	108
JMC2665S	108
JMC2670	108
JMC2670S	108
JMC2675	108
JMC2675S	108
JMC-DLP50	102
JMC-DLP50S	102
JMC-DLP60	102
JMC-DLP60S	102
JMS2630	109
JMS2630S	109
JMS2640	109
JMS2640D	109
JMS2640DS	109
JMS2640S	109
JMS2650	109
JMS2650D	109
JMS2650DS	109
JMS2650S	109
JMS2655	109
JMS2655S	109
JMS2660	109
JMS2660S	109
JMS2665	109
JMS2665S	109
JMS2670	109
JMS2670S	109
JMS2675	109
JMS2675S	109
JMW2630	106
JMW2630S	106
JMW2640	106
JMW2640D	106
JMW2640DS	106
JMW2640S	106
JMW2650	106
JMW2650D	106
JMW2650DS	106
JMW2650H	106
JMW2650HS	106
JMW2650S	106
JMW2655	106
JMW2655S	106
JMW2660H	106
JMW2660HS	106
JMW2665H	106
JMW2665HS	106
JMW2670H	106
JMW2670HS	106
JMW2675H	106
JMW2675HS	106
JMW-DLP50	101
JMW-DLP50S	101
JMW-DLP60	101
JMW-DLP60S	101
LCC-18	10, 11, 65
LCC-18-C	10, 11, 65
LCC-18-CS	10, 11, 65
LCC-18S	10, 11, 65
LCC-36	10, 11, 65
LCC-36-C	10, 11, 65
LCC-36-CS	10, 11, 65
LCC-36S	10, 11, 65
LCFS-100	76
LCFS-100S	76
LCH-100	73
LCH-100G	73
LCS-KLA	10, 11, 50
LCT-101	72
LCV-100	74
LDM233K	130
LDS1920U	111
LDS1920U-S	111
LDS2527U	111
LDS2527U-S	111
LDS32U	111
LDS32U-S	111
LDS375	111
LSS375	112
LWB375T	105
LWB375TCB	105
LWB530T	105
MDJ700	70, 71
MDJ701	70, 71
MDJ710	70, 71
MDJ711	70, 71
MDJ720	70, 71
MDJ721	70, 71
MDJ760	70, 71
MSA-101	131
MSA-101S	131
MSA-301	131
MSA-301S	131
ONE-TP	8, 9, 40
ONE-TP-S	8, 9, 40
OP-ACC204	142
OP-ACC307	142

Index

Model	Page #
OP-JMW2630	107
OP-JMW2640	107
OP-JMW2640D	107
OP-JMW2650	107
OP-JMW2650D	107
OP-JMW2650H	107
OP-JMW2655	107
OP-JMW2660H	107
OP-JMW2665H	107
OP-JMW2670H	107
OP-JMW2675H	107
OP-LWB375T	107
OP-LWB530T	107
OP-WB20T	107
OP-WB27T	107
PA730P	10, 11, 49
PA730P-S	10, 11, 49
PA740P	10, 11, 53
PA740P-S	10, 11, 53
PC25	136
PC25G	136
PC930A	10, 11, 64
PC930A-S	10, 11, 64
PC930A-W	10, 11, 64
PC930B	10, 11, 64
PC930B-S	10, 11, 64
PC930B-W	10, 11, 64
PC930C	10, 11, 64
PC930C-S	10, 11, 64
PC930C-W	10, 11, 64
PC932A	10, 11, 66
PC932A-S	10, 11, 66
PC932A-W	10, 11, 66
PC932B	10, 11, 66
PC932B-S	10, 11, 66
PC932B-W	10, 11, 66
PC932C	10, 11, 66
PC932C-S	10, 11, 66
PC932C-W	10, 11, 66
PE1120	94
PE1120-W	94
PF630	8, 9, 13
PF632	8, 9, 15
PF640	8, 9, 17
PF650	8, 9, 19
PF660	8, 9, 21
PFT640	8, 9, 32
PFT660	8, 9, 37
PJF2___models	87
PJF2-1	87
PJF2-1-S	87
PJF2-UNV	87
PJF2-UNV-S	87
PLA50	57
PLA50-S	57
PLA50-UNL	10, 11, 57
PLA50-UNL-S	10, 11, 57
PLA50-UNLP	10, 11, 57
PLA50-UNLP-S	10, 11, 57
PLA50-UNLP-GB	10, 11, 57
PLA50-UNLP-GS	10, 11, 57
PLA60	58
PLA60-S	58
PLA60-UNL	10, 11, 58
PLA60-UNL-S	10, 11, 58
PLA60-UNLP	10, 11, 58
PLA60-UNLP-S	10, 11, 58
PLA60-UNLP-GB	10, 11, 58
PLA60-UNLP-GS	10, 11, 58
PLAV60	59
PLAV60-S	59
PLAV60-UNL	10, 11, 59
PLAV60-UNL-S	10, 11, 59
PLAV60-UNLP	10, 11, 59
PLAV60-UNLP-S	10, 11, 59
PLAV60-UNLP-GB	10, 11, 59
PLAV60-UNLP-GS	10, 11, 59
PLAV70	60
PLAV70-S	60
PLAV70-UNL	10, 11, 60
PLAV70-UNL-S	10, 11, 60
PLAV70-UNLP	10, 11, 60
PLAV70-UNLP-S	10, 11, 60
PLAV70-UNLP-GB	10, 11, 60
PLAV70-UNLP-GS	10, 11, 60
PLB-1	68
PLCK-1	69
PLCK-UNL	69
PLCM-1	67
PLCM-1CP	67
PLCM-2	67, 71
PLCM-UN1	67
PLCM-UN1-CP	67
PLCM-UNL	10, 11, 67
PLCM-UNL-CP	10, 11, 67
PLT-BLK	75
PM600	124
PM600W	124
PM610	122
PM610G	122
PM610S	122
PM610SG	122
PM610W	122
PM610WG	122
PP730P	10, 11, 43
PP730P-S	10, 11, 43
PP740P	10, 11, 45
PP740P-S	10, 11, 45
PPA	91
PPA-S	91
PPA-W	91
PPB	91
PPB-S	91
PPB-W	91
PPC	91
PPC-S	91
PPC-W	91
PPF	88
PPF-S	88
PPF-W	88

Index

Model	Page #
PRG-1	85
PRG-1-S	85
PRG-1-W	85
PRG-UNV	85
PRG-UNV-S	85
PRG-UNV-W	85
PRS___models	86
PRS-1	86
PRS-1S	86
PRS-1W	86
PRS-EXA	90
PRS-EXA-S	90
PRS-EXA-W	90
PRS-EXB	90
PRS-EXB-S	90
PRS-EXB-W	90
PRS-EXC	90
PRS-EXC-S	90
PRS-EXC-W	90
PRS-KIT0811	89
PRS-KIT1420	89
PRS-KIT2026	89
PRS-UNV	86
PRS-UNV-S	86
PRS-UNV-W	86
PS-1	47
PS-2	47
PS200	123
PSM-UNV	92
PSM-UNV-S	92
PSM-UNV-W	92
PSMU-PRS	93
PSMU-PRS-S	93
PSMU-PRS-W	93
PSP2	132
PSP2W	132
PSP5	132
PSP5W	132

Model	Page #
PT630	8, 9, 26
PT632	8, 9, 28
PT640	8, 9, 31
PT650	8, 9, 34
PT660	8, 9, 36
PWA-14	141
PWA-14S	141
PWA-14W	141
SA730P	10, 11, 48
SA730P-S	10, 11, 48
SA740P	10, 11, 52
SA740P-S	10, 11, 52
SA745P	10, 11, 54
SA745P-S	10, 11, 54
SA745PU	10, 11, 54
SA745PU-S	10, 11, 54
SA750P	10, 11, 55
SA750P-S	10, 11, 55
SA750PU	10, 11, 55
SA750PU-S	10, 11, 55
SA760P	10, 11, 56
SA760P-S	10, 11, 56
SA760PU	10, 11, 56
SA760PU-S	10, 11, 56
SAL730P	10, 11, 51
SAL730P-S	10, 11, 51
SCS211	121
SCS212	121
SCS221	120
SCS222	120
SF16D	24
SF24D	24
SF630	8, 9, 12
SF630-S	8, 9, 12
SF630P	8, 9, 12
SF630P-S	8, 9, 12
SF632	8, 9, 14
SF632-S	8, 9, 14
SF632P	8, 9, 14
SF632P-S	8, 9, 14

Model	Page #
SF640	8, 9, 16
SF640-S	8, 9, 16
SF640P	8, 9, 16
SF640P-S	8, 9, 16
SF650	8, 9, 18
SF650-S	8, 9, 18
SF650P	8, 9, 18
SF650P-S	8, 9, 18
SF660	8, 9, 20
SF660-S	8, 9, 20
SF660P	8, 9, 20
SF660P-S	8, 9, 20
SF670	8, 9, 22
SF670-S	8, 9, 22
SF670P	8, 9, 22
SF670P-S	8, 9, 22
SF680	8, 9, 23
SF680-S	8, 9, 23
SF680P	8, 9, 23
SF680P-S	8, 9, 23
SGLB01	77
SGLS01	77
SP730P	10, 11, 42
SP730P-S	10, 11, 42
SP740P	10, 11, 44
SP740P-S	10, 11, 44
SP850	46
SP850-S	46
SP850P	46
SP850P-S	46
SP850-UNL	10, 11, 46
SP850-UNL-S	10, 11, 46
SP850-UNLP	10, 11, 46
SP850-UNLP-S	10, 11, 46
SP850-UNLP-GB	10, 11, 46
SP850-UNLP-GS	10, 11, 46
SPK811	133
SPK811W	133
SPK815	134
SR1G	80
SR1M	80
SR560G	10, 11, 80

Index

Model	Page #
SR560M	10, 11, 80
SS550P	10, 11, 77
SS550P-S	10, 11, 77
ST16D	41
ST24D	41
ST630	8, 9, 25
ST630-S	8, 9, 25
ST630P	8, 9, 25
ST630P-S	8, 9, 25
ST632	8, 9, 27
ST632-S	8, 9, 27
ST632P	8, 9, 27
ST632P-S	8, 9, 27
ST635	8, 9, 29
ST635-S	8, 9, 29
ST635P	8, 9, 29
ST635P-S	8, 9, 29
ST640	8, 9, 30
ST640-S	8, 9, 30
ST640P	8, 9, 30
ST640P-S	8, 9, 30
ST650	8, 9, 33
ST650-S	8, 9, 33
ST650P	8, 9, 33
ST650P-S	8, 9, 33
ST660	8, 9, 35
ST660-S	8, 9, 35
ST660P	8, 9, 35
ST660P-S	8, 9, 35
ST670	8, 9, 38
ST670-S	8, 9, 38
ST670P	8, 9, 38
ST670P-S	8, 9, 38
ST680	8, 9, 39
ST680-S	8, 9, 39
ST680P	8, 9, 39
ST680P-S	8, 9, 39
SVPM25-J	128
SVPM25-JS	128
SVPM25-S	128
SVPM25-W	128
SVPM35-J	128
SVPM35-JS	128
SVPM35-S	128
SVPM35-W	128
SVPM40-J	128
SVPM40-JS	128
SVPM40-L	128
SVPM40-S	128
SVPM40-W	128
SVPM45-J	128
SVPM45-JS	128
SVPM45-S	128
SVPM45-W	128
SWM310	105
SWM314	105
VPM081	129
VPM081-J	129
VPM081-S	129
VPM081-W	129
VPM25-J	128
VPM25-JS	128
VPM25-S	128
VPM25-W	128
VPM35-J	128
VPM35-JS	128
VPM35-S	128
VPM35-W	128
VPM40-J	128
VPM40-JS	128
VPM40-L	128
VPM40-S	128
VPM40-W	128
VPM45-J	128
VPM45-JS	128
VPM45-S	128
VPM45-W	128
WB20T	105
WB27T	105
WMJ018	141
WMJ022	141
WMJ022CB	141
WMJ025H	141
WSP414	142
WSP415	141
WSP420	141
WSP420W	141
WSP425	141
WSP425W	141
WSP430	141
WSP430W	141
WSP435	141
WSP435W	141
WSP440	141
WSP440W	141
WSP445	141
WSP445W	141
WSP450	141
WSP450W	141
WSP460	141
WSP460W	141
WSP470	141
WSP470W	141
WSP490	142
WSP490S	142
WSP716	142
WSP716GB	142
WSP716GS	142
WSP716S	142
WSP716W	142
WSP724	142
WSP724GB	142
WSP724GS	142
WSP724S	142
WSP724W	142

Terms & Conditions

TERMS OF PAYMENT
Payment is due in U.S. dollars, net 30 days from the date of invoice. Each shipment shall be considered a separate and independent transaction, and payment, therefore, shall be made accordingly. Please include our invoice number with your payment.

PRICES
Prices are subject to change without prior notice. Orders are accepted at pricing in effect on the date of shipment. Customers requiring price guarantees for a specific period of time must submit a written list of accounts on which proposals have been made, giving the date of the proposal, the customer's name, items quoted and the expected purchase date.

SPECIFICATIONS
Peerless is constantly striving to develop new products and improve existing ones. We therefore reserve the right to change or revise product designs, product specifications, and model numbers without notice.

DELIVERY
Prices are FOB our plant, Melrose Park, Illinois, or point of shipment. All transportation costs and risk of freight damage are the obligation of the buyer. Any claims for shortages or damages, whether concealed or otherwise, must be filed with the common freight carrier. All promises of delivery are made in good faith, and Peerless will make every reasonable effort to see that they are fulfilled. However, if we are unable to meet scheduled delivery dates due to factors beyond our control, such as fires, strikes, government directive, or failure of our suppliers to meet their promises, we shall not be liable for consequential or special damage. Refused shipments will automatically receive a 25% restocking fee plus the cost of the return freight.

RETURN OF GOODS
Return of goods for repair, warranty claims, credit or any other reason will not be accepted without a RETURN MATERIAL AUTHORIZATION (RMA) number. Such numbers can be obtained from the Peerless Industries Customer Care Team upon request, provided that all of the necessary information is available regarding the proposed return. Defective goods will be replaced or credited, at the customer's option, at no additional charge.

A minimum 25% restocking charge applies to all non-defective products returned for credit within the first 30 days after purchase. Thereafter, a larger restocking charge will be applied based upon the date of original shipment. Products will not be accepted for return 120 days after their original ship date. Peerless additionally reserves the right to impose a repackaging charge when products are returned damaged and cannot be directly resold. Furthermore, any product specially produced or not normally carried in inventory will not be accepted for return under any circumstances. Also, any obsolete products will not be accepted for return under any circumstances. All items to be returned must be sent back to us via pre-paid freight, with the RETURN MATERIAL AUTHORIZATION (RMA) number clearly marked on the carton and noted on the packing slip. No freight collect shipments will be accepted.

If a customer orders the wrong product by mistake, it may be returned with a reduced restocking charge of 10% if ALL of the following conditions are met; the incorrectly ordered products are returned within 30 days of shipment, the customer must pay freight to return the product, the product must be received in the original packaging and in like-new condition, the customer must immediately place a replacement order of equal or greater value than that of the order being returned. If and only if all of these conditions are met, at the discretion of Peerless, may a customer receive the reduced 10% restocking charge.

It is the purchaser's responsibility to provide adequate packaging to protect the product being returned. Peerless reserves the right to accept or reject the returned product subject to an inspection upon receipt. Products that are returned severely damaged may be rejected and therefore will not qualify for any type of return credit. The following chart defines the minimum restocking charge that will be applied for goods accepted for return by Peerless. It does not include any additional charges that may apply for damaged products or those needing rework.

Days since shipping	Restocking Charge
0-30	25%
31-59	35%
60-119	50%
120+	Returns not accepted

SPECIAL ORDERS
We are ready to work with you to tailor our products for your special equipment mounting needs. In most cases, we can provide special paint, engineering, and manufacturing processes. Standard product colors are indicated within the catalog. Product (not including fasteners) can be ordered in other paint choices including black, white, silver, and gray for a surcharge. Charges for other custom paint colors and product design/manufacturing modifications will be quoted on an individual basis. Custom painted or manufactured product CANNOT BE RETURNED. Contact the Customer Care Team for more information.

QUICKSHIP® PROGRAM
Catalog items carrying the Quickship® lightning bolt symbol are typically available for shipment the same or next day if the order is received by 1:30 p.m. CST. Call your Customer Care representative as we may be able to fulfill your order even after 1:30 p.m. CST. Standard delivery is scheduled for within 48 hours (2 business days) of receipt of order. Exact lead times may vary based on quantities ordered. For exact lead-times, contact your Customer Care representative.

LIMITED WARRANTY
Peerless warrants its products, under normal use, to be free from defects in material and workmanship for a period of five years from the date of purchase. Peerless, at its sole discretion, will repair or replace such defective equipment free of charge provided the products are returned prepaid to Peerless. Thereafter, repairs will be made at established factory prices. Unauthorized service or repairs by anyone other than authorized Peerless personnel renders this Warranty void and releases Peerless from any further responsibility or obligation. Any damage caused by failure to observe proper packing or to observe instructions for installation, by accident or in transit or elsewhere will not be covered by the Warranty. This Warranty is in lieu of all other Warranties expressed or implied, and no one is authorized to assume any liability on behalf of Peerless or impose any obligation on it in connection with the sale of any product other than as outlined above. In no event will responsibility be assumed or implied for consequential damages arising from the theft of any product secured by a Peerless security device, by delay of installation, interrupted operation or other causes.

FREIGHT OPTIONS
Freight Program Peerless' NO SUPRISES™ FREIGHT PROGRAM takes the guesswork out of calculating your total costs. Freight costs are based on a percentage of the total order value. Peerless' Freight Program only applies to dock deliveries. For further information or to obtain a freight quote, please contact Customer Care or your Peerless Sales Manager.

Collect Have your order billed to the receiver on the receiver's freight account.

Third Party Bill Have your order billed to an approved third party's freight account.

Peerless Industries, Inc.
3215 W. North Avenue, Melrose Park, IL 60160 USA
Toll Free: 800-865-2112 · 708-865-8870
Fax: 708-865-2941
www.peerlessmounts.com

LIT-0030, rev 6, 1-2-08

© 2008 Peerless Industries, Inc. All rights reserved.
Printed in USA